

# MC74HC259A

## 8-Bit Addressable Latch 1-of-8 Decoder

### High-Performance Silicon-Gate CMOS

The MC74HC259A is identical in pinout to the LS259. The device inputs are compatible with standard CMOS outputs; with pullup resistors, they are compatible with LSTTL outputs.

The HC259A has four modes of operation as shown in the mode selection table. In the addressable latch mode, the data on Data In is written into the addressed latch. The addressed latch follows the data input with all non-addressed latches remaining in their previous states. In the memory mode, all latches remain in their previous state and are unaffected by the Data or Address inputs. In the one-of-eight decoding or demultiplexing mode, the addressed output follows the state of Data In with all other outputs in the LOW state. In the Reset mode all outputs are LOW and unaffected by the address and data inputs. When operating the HC259A as an addressable latch, changing more than one bit of the address could impose a transient wrong address. Therefore, this should only be done while in the memory mode.


#### Features

- Output Drive Capability: 10 LSTTL Loads
- Outputs Directly Interface to CMOS, NMOS, and TTL
- Operating Voltage Range: 2 to 6 V
- Low Input Current: 1  $\mu$ A
- High Noise Immunity Characteristic of CMOS Devices
- NLV Prefix for Automotive and Other Applications Requiring Unique Site and Control Change Requirements; AEC-Q100 Qualified and PPAP Capable
- These Devices are Pb-Free, Halogen Free and are RoHS Compliant



ON Semiconductor®

<http://onsemi.com>

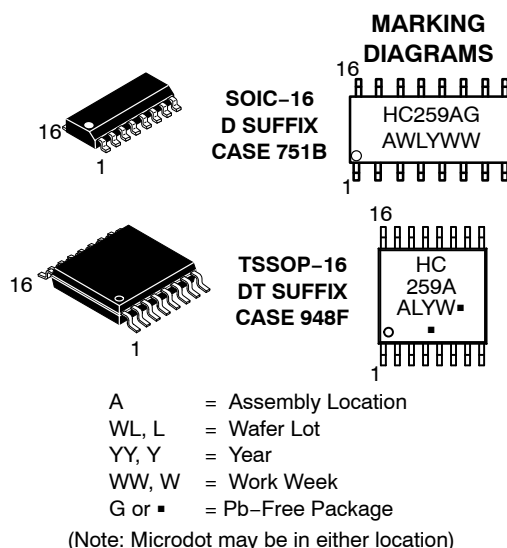

#### PIN ASSIGNMENT

|     |   |    |                 |
|-----|---|----|-----------------|
| A0  | 1 | 16 | V <sub>CC</sub> |
| A1  | 2 | 15 | RESET           |
| A2  | 3 | 14 | ENABLE          |
| Q0  | 4 | 13 | DATA IN         |
| Q1  | 5 | 12 | Q7              |
| Q2  | 6 | 11 | Q6              |
| Q3  | 7 | 10 | Q5              |
| GND | 8 | 9  | Q4              |


#### MODE SELECTION TABLE

| Enable | Reset | Mode                 |
|--------|-------|----------------------|
| L      | H     | Addressable Latch    |
| H      | H     | Memory               |
| L      | L     | 8-Line Demultiplexer |
| H      | L     | Reset                |

#### ORDERING INFORMATION

See detailed ordering and shipping information in the package dimensions section on page 6 of this data sheet.

# MC74HC259A

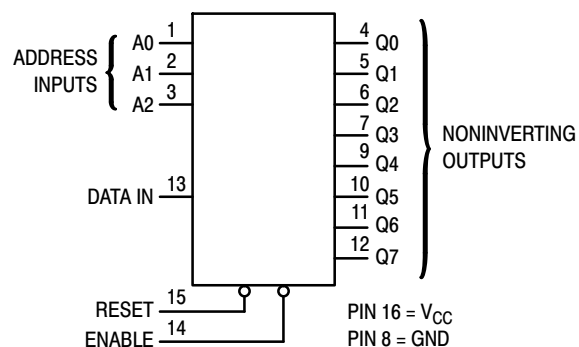

**LATCH SELECTION TABLE**

| Address Inputs |                |                | Latch Addressed |
|----------------|----------------|----------------|-----------------|
| A <sub>2</sub> | A <sub>1</sub> | A <sub>0</sub> |                 |
| L              | L              | L              | Q0              |
| L              | L              | H              | Q1              |
| L              | H              | L              | Q2              |
| L              | H              | H              | Q3              |
| H              | L              | L              | Q4              |
| H              | L              | H              | Q5              |
| H              | H              | L              | Q6              |
| H              | H              | H              | Q7              |

**Figure 1. Logic Diagram**

## MAXIMUM RATINGS

| Symbol           | Parameter                                                     | Value                         | Unit |
|------------------|---------------------------------------------------------------|-------------------------------|------|
| V <sub>CC</sub>  | DC Supply Voltage (Referenced to GND)                         | -0.5 to +7.0                  | V    |
| V <sub>in</sub>  | DC Input Voltage (Referenced to GND)                          | -0.5 to V <sub>CC</sub> + 0.5 | V    |
| V <sub>out</sub> | DC Output Voltage (Referenced to GND)                         | -0.5 to V <sub>CC</sub> + 0.5 | V    |
| I <sub>in</sub>  | DC Input Current, per Pin                                     | ±20                           | mA   |
| I <sub>out</sub> | DC Output Current, per Pin                                    | ±25                           | mA   |
| I <sub>CC</sub>  | DC Supply Current, V <sub>CC</sub> and GND Pins               | ±50                           | mA   |
| P <sub>D</sub>   | Power Dissipation in Still Air, SOIC Package<br>TSSOP Package | 500<br>450                    | mW   |
| T <sub>stg</sub> | Storage Temperature                                           | -65 to +150                   | °C   |

This device contains protection circuitry to guard against damage due to high static voltages or electric fields. However, precautions must be taken to avoid applications of any voltage higher than maximum rated voltages to this high-impedance circuit. For proper operation, V<sub>in</sub> and V<sub>out</sub> should be constrained to the range GND ≤ (V<sub>in</sub> or V<sub>out</sub>) ≤ V<sub>CC</sub>. Unused inputs must always be tied to an appropriate logic voltage level (e.g., either GND or V<sub>CC</sub>). Unused outputs must be left open.

Stresses exceeding Maximum Ratings may damage the device. Maximum Ratings are stress ratings only. Functional operation above the Recommended Operating Conditions is not implied. Extended exposure to stresses above the Recommended Operating Conditions may affect device reliability.

## RECOMMENDED OPERATING CONDITIONS

| Symbol                             | Parameter                                            | Min                                                                                                                                                       | Max             | Unit |
|------------------------------------|------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------|------|
| V <sub>CC</sub>                    | DC Supply Voltage (Referenced to GND)                | 2.0                                                                                                                                                       | 6.0             | V    |
| V <sub>in</sub> , V <sub>out</sub> | DC Input Voltage, Output Voltage (Referenced to GND) | 0                                                                                                                                                         | V <sub>CC</sub> | V    |
| T <sub>A</sub>                     | Operating Temperature, All Package Types             | -55                                                                                                                                                       | +125            | °C   |
| t <sub>r</sub> , t <sub>f</sub>    | Input Rise and Fall Time (Figure 2)                  | V <sub>CC</sub> = 2.0 V    0    1000<br>V <sub>CC</sub> = 3.0 V    0    600<br>V <sub>CC</sub> = 4.5 V    0    500<br>V <sub>CC</sub> = 6.0 V    0    400 |                 | ns   |

# MC74HC259A

## DC ELECTRICAL CHARACTERISTICS (Voltages Referenced to GND)

| Symbol          | Parameter                                      | Test Conditions                                                                                                                                   | V <sub>CC</sub><br>V | Guaranteed Limit |        |         | Unit |
|-----------------|------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------|----------------------|------------------|--------|---------|------|
|                 |                                                |                                                                                                                                                   |                      | - 55 to<br>25°C  | ≤ 85°C | ≤ 125°C |      |
| V <sub>IH</sub> | Minimum High-Level Input Voltage               | V <sub>out</sub> = 0.1 V or V <sub>CC</sub> - 0.1 V<br> I <sub>out</sub>   ≤ 20 μA                                                                | 2.0                  | 1.5              | 1.5    | 1.5     | V    |
|                 |                                                |                                                                                                                                                   | 3.0                  | 2.1              | 2.1    | 2.1     |      |
|                 |                                                |                                                                                                                                                   | 4.5                  | 3.15             | 3.15   | 3.15    |      |
|                 |                                                |                                                                                                                                                   | 6.0                  | 4.2              | 4.2    | 4.2     |      |
| V <sub>IL</sub> | Maximum Low-Level Input Voltage                | V <sub>out</sub> = 0.1 V or V <sub>CC</sub> - 0.1 V<br> I <sub>out</sub>   ≤ 20 μA                                                                | 2.0                  | 0.5              | 0.5    | 0.5     | V    |
|                 |                                                |                                                                                                                                                   | 3.0                  | 0.9              | 0.9    | 0.9     |      |
|                 |                                                |                                                                                                                                                   | 4.5                  | 1.35             | 1.35   | 1.35    |      |
|                 |                                                |                                                                                                                                                   | 6.0                  | 1.80             | 1.80   | 1.80    |      |
| V <sub>OH</sub> | Minimum High-Level Output Voltage              | V <sub>in</sub> = V <sub>IH</sub> or V <sub>IL</sub><br> I <sub>out</sub>   ≤ 20 μA                                                               | 2.0                  | 1.9              | 1.9    | 1.9     | V    |
|                 |                                                |                                                                                                                                                   | 4.5                  | 4.4              | 4.4    | 4.4     |      |
|                 |                                                |                                                                                                                                                   | 6.0                  | 5.9              | 5.9    | 5.9     |      |
|                 |                                                | V <sub>in</sub> = V <sub>IH</sub> or V <sub>IL</sub>  I <sub>out</sub>   ≤ 2.4 mA<br> I <sub>out</sub>   ≤ 4.0 mA<br> I <sub>out</sub>   ≤ 5.2 mA | 3.0                  | 2.48             | 2.34   | 2.20    |      |
|                 |                                                |                                                                                                                                                   | 4.5                  | 3.98             | 3.84   | 3.70    |      |
|                 |                                                |                                                                                                                                                   | 6.0                  | 5.48             | 5.34   | 5.20    |      |
| V <sub>OL</sub> | Maximum Low-Level Output Voltage               | V <sub>in</sub> = V <sub>IH</sub> or V <sub>IL</sub><br> I <sub>out</sub>   ≤ 20 μA                                                               | 2.0                  | 0.1              | 0.1    | 0.1     | V    |
|                 |                                                |                                                                                                                                                   | 4.5                  | 0.1              | 0.1    | 0.1     |      |
|                 |                                                |                                                                                                                                                   | 6.0                  | 0.1              | 0.1    | 0.1     |      |
|                 |                                                | V <sub>in</sub> = V <sub>IH</sub> or V <sub>IL</sub>  I <sub>out</sub>   ≤ 2.4 mA<br> I <sub>out</sub>   ≤ 4.0 mA<br> I <sub>out</sub>   ≤ 5.2 mA | 3.0                  | 0.26             | 0.33   | 0.40    |      |
|                 |                                                |                                                                                                                                                   | 4.5                  | 0.26             | 0.33   | 0.40    |      |
|                 |                                                |                                                                                                                                                   | 6.0                  | 0.26             | 0.33   | 0.40    |      |
| I <sub>in</sub> | Maximum Input Leakage Current                  | V <sub>in</sub> = V <sub>CC</sub> or GND                                                                                                          | 6.0                  | ± 0.1            | ± 1.0  | ± 1.0   | μA   |
| I <sub>CC</sub> | Maximum Quiescent Supply Current (per Package) | V <sub>in</sub> = V <sub>CC</sub> or GND<br>I <sub>out</sub> = 0 μA                                                                               | 6.0                  | 4                | 40     | 160     | μA   |

# MC74HC259A

## AC ELECTRICAL CHARACTERISTICS (C<sub>L</sub> = 50 pF, Input t<sub>r</sub> = t<sub>f</sub> = 6 ns)

| Symbol                                 | Parameter                                                                | V <sub>CC</sub><br>V | Guaranteed Limit |        |         | Unit |
|----------------------------------------|--------------------------------------------------------------------------|----------------------|------------------|--------|---------|------|
|                                        |                                                                          |                      | – 55 to 25°C     | ≤ 85°C | ≤ 125°C |      |
| t <sub>PLH</sub> ,<br>t <sub>PHL</sub> | Maximum Propagation Delay, Data to Output<br>(Figures 2 and 7)           | 2.0                  | 125              | 160    | 175     | ns   |
|                                        |                                                                          | 3.0                  | 45               | 60     | 70      |      |
|                                        |                                                                          | 4.5                  | 32               | 32     | 42      |      |
|                                        |                                                                          | 6.0                  | 25               | 28     | 33      |      |
| t <sub>PLH</sub> ,<br>t <sub>PHL</sub> | Maximum Propagation Delay, Address Select to Output<br>(Figures 3 and 7) | 2.0                  | 150              | 175    | 200     | ns   |
|                                        |                                                                          | 3.0                  | 60               | 70     | 80      |      |
|                                        |                                                                          | 4.5                  | 32               | 40     | 45      |      |
|                                        |                                                                          | 6.0                  | 28               | 30     | 35      |      |
| t <sub>PLH</sub> ,<br>t <sub>PHL</sub> | Maximum Propagation Delay, Enable to Output<br>(Figures 4 and 7)         | 2.0                  | 150              | 175    | 200     | ns   |
|                                        |                                                                          | 3.0                  | 60               | 70     | 80      |      |
|                                        |                                                                          | 4.5                  | 32               | 40     | 45      |      |
|                                        |                                                                          | 6.0                  | 28               | 30     | 35      |      |
| t <sub>PHL</sub>                       | Maximum Propagation Delay, Reset to Output<br>(Figures 5 and 7)          | 2.0                  | 110              | 125    | 160     | ns   |
|                                        |                                                                          | 3.0                  | 36               | 45     | 60      |      |
|                                        |                                                                          | 4.5                  | 22               | 26     | 32      |      |
|                                        |                                                                          | 6.0                  | 19               | 23     | 28      |      |
| t <sub>TLH</sub> ,<br>t <sub>THL</sub> | Maximum Output Transition Time, Any Output<br>(Figures 2 and 7)          | 2.0                  | 75               | 95     | 110     | ns   |
|                                        |                                                                          | 3.0                  | 27               | 32     | 36      |      |
|                                        |                                                                          | 4.5                  | 15               | 19     | 22      |      |
|                                        |                                                                          | 6.0                  | 13               | 16     | 19      |      |
| C <sub>in</sub>                        | Maximum Input Capacitance                                                | –                    | 10               | 10     | 10      | pF   |

|                 |                                             |                                         |    |
|-----------------|---------------------------------------------|-----------------------------------------|----|
| C <sub>PD</sub> | Power Dissipation Capacitance (Per Package) | Typical @ 25°C, V <sub>CC</sub> = 5.0 V | pF |
|                 |                                             | 30                                      |    |

## TIMING REQUIREMENTS (Input t<sub>r</sub> = t<sub>f</sub> = 6 ns)

| Symbol                          | Parameter                                                   | V <sub>CC</sub><br>V | Guaranteed Limit |        |         | Unit |
|---------------------------------|-------------------------------------------------------------|----------------------|------------------|--------|---------|------|
|                                 |                                                             |                      | – 55 to 25°C     | ≤ 85°C | ≤ 125°C |      |
| t <sub>su</sub>                 | Minimum Setup Time, Address or Data to Enable<br>(Figure 6) | 2.0                  | 75               | 95     | 110     | ns   |
|                                 |                                                             | 3.0                  | 30               | 40     | 55      |      |
|                                 |                                                             | 4.5                  | 15               | 19     | 22      |      |
|                                 |                                                             | 6.0                  | 13               | 16     | 19      |      |
| t <sub>h</sub>                  | Minimum Hold Time, Enable to Address or Data<br>(Figure 6)  | 2.0                  | 1                | 1      | 1       | ns   |
|                                 |                                                             | 3.0                  | 1                | 1      | 1       |      |
|                                 |                                                             | 4.5                  | 1                | 1      | 1       |      |
|                                 |                                                             | 6.0                  | 1                | 1      | 1       |      |
| t <sub>w</sub>                  | Minimum Pulse Width, Reset or Enable<br>(Figure 4 or 5)     | 2.0                  | 70               | 90     | 100     | ns   |
|                                 |                                                             | 3.0                  | 27               | 32     | 36      |      |
|                                 |                                                             | 4.5                  | 15               | 19     | 22      |      |
|                                 |                                                             | 6.0                  | 13               | 16     | 19      |      |
| t <sub>r</sub> , t <sub>f</sub> | Maximum Input Rise and Fall Times<br>(Figure 2)             | 2.0                  | 1000             | 1000   | 1000    | ns   |
|                                 |                                                             | 3.0                  | 800              | 800    | 800     |      |
|                                 |                                                             | 4.5                  | 500              | 500    | 500     |      |
|                                 |                                                             | 6.0                  | 400              | 400    | 400     |      |

# MC74HC259A

## SWITCHING WAVEFORMS

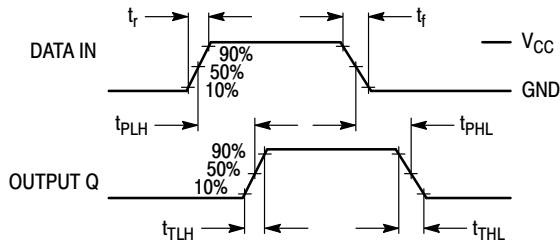


Figure 2.

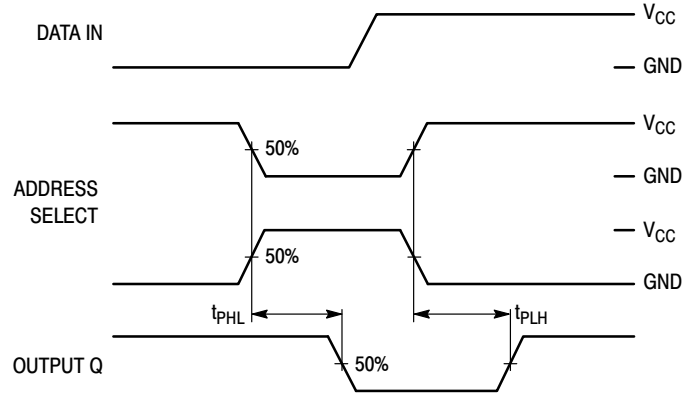


Figure 3.

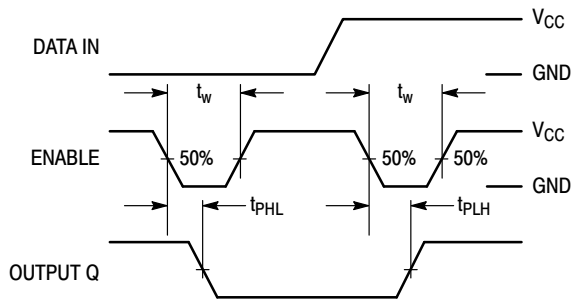


Figure 4.

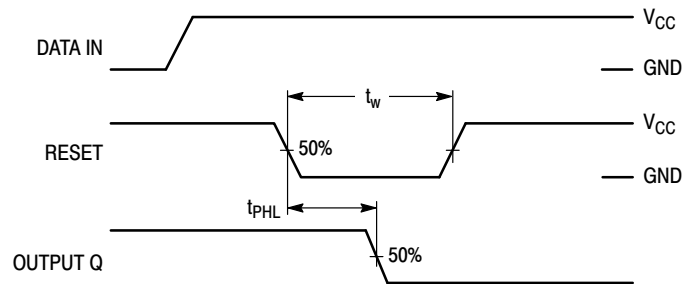


Figure 5.


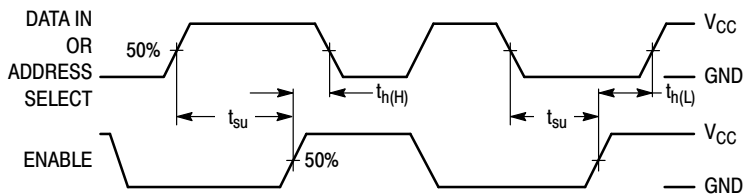


Figure 6.

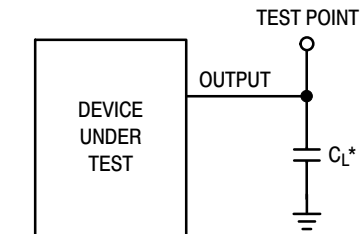

\*Includes all probe and jig capacitance

Figure 7. Test Circuit

# MC74HC259A

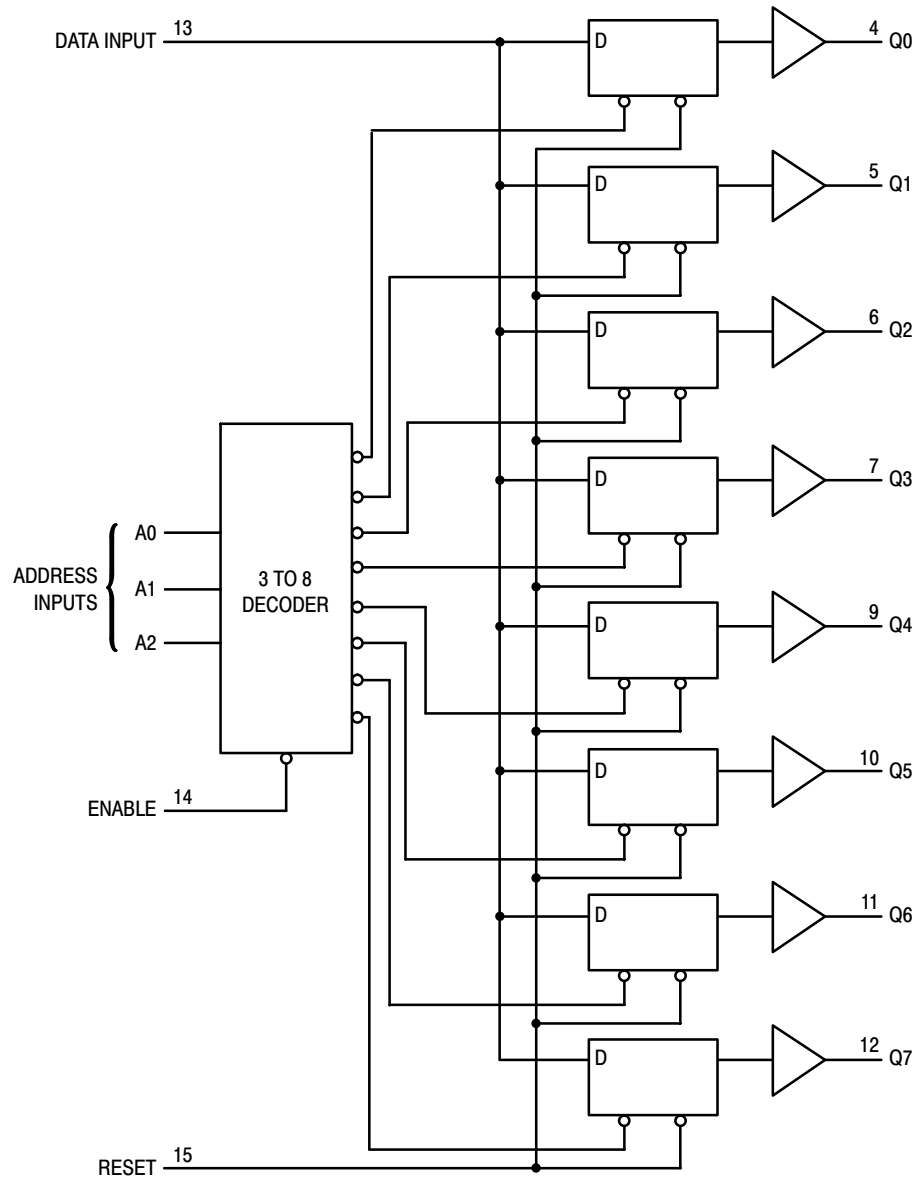


Figure 8. Expanded Logic Diagram

## ORDERING INFORMATION

| Device          | Package               | Shipping <sup>†</sup> |
|-----------------|-----------------------|-----------------------|
| MC74HC259ADG    | SOIC-16<br>(Pb-Free)  | 48 Units / Rail       |
| MC74HC259ADR2G  | SOIC-16<br>(Pb-Free)  | 2500 / Tape & Reel    |
| MC74HC259ADTR2G | TSSOP-16<br>(Pb-Free) | 2500 / Tape & Reel    |
| MC74HC259ADTG   | TSSOP-16<br>(Pb-Free) | 96 Units / Rail       |
| NLVHC259ADR2G*  | SOIC-16<br>(Pb-Free)  | 2500 / Tape & Reel    |


<sup>†</sup>For information on tape and reel specifications, including part orientation and tape sizes, please refer to our Tape and Reel Packaging Specifications Brochure, BRD8011/D.

\*NLV Prefix for Automotive and Other Applications Requiring Unique Site and Control Change Requirements; AEC-Q100 Qualified and PPAP Capable

# MC74HC259A

## PACKAGE DIMENSIONS

SOIC-16  
CASE 751B-05  
ISSUE K

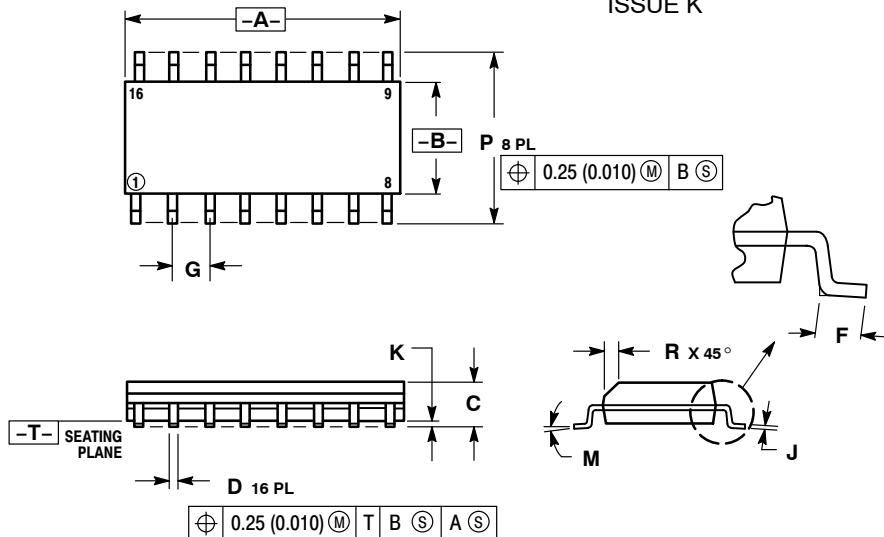


### NOTES:

1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
2. CONTROLLING DIMENSION: MILLIMETER.
3. DIMENSIONS A AND B DO NOT INCLUDE MOLD PROTRUSION.
4. MAXIMUM MOLD PROTRUSION 0.15 (0.006) PER SIDE.
5. DIMENSION D DOES NOT INCLUDE DAMBAR PROTRUSION. ALLOWABLE DAMBAR PROTRUSION SHALL BE 0.127 (0.005) TOTAL IN EXCESS OF THE D DIMENSION AT MAXIMUM MATERIAL CONDITION.

| DIM | MILLIMETERS |       | INCHES    |       |
|-----|-------------|-------|-----------|-------|
|     | MIN         | MAX   | MIN       | MAX   |
| A   | 9.80        | 10.00 | 0.386     | 0.393 |
| B   | 3.80        | 4.00  | 0.150     | 0.157 |
| C   | 1.35        | 1.75  | 0.054     | 0.068 |
| D   | 0.35        | 0.49  | 0.014     | 0.019 |
| F   | 0.40        | 1.25  | 0.016     | 0.049 |
| G   | 1.27 BSC    |       | 0.050 BSC |       |
| J   | 0.19        | 0.25  | 0.008     | 0.009 |
| K   | 0.10        | 0.25  | 0.004     | 0.009 |
| M   | 0°          | 7°    | 0°        | 7°    |
| P   | 5.80        | 6.20  | 0.229     | 0.244 |
| R   | 0.25        | 0.50  | 0.010     | 0.019 |

### SOLDERING FOOTPRINT\*

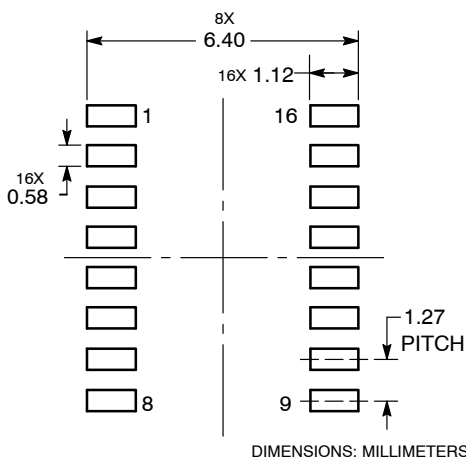


\*For additional information on our Pb-Free strategy and soldering details, please download the ON Semiconductor Soldering and Mounting Techniques Reference Manual, SOLDERRM/D.

# MC74HC259A

## PACKAGE DIMENSIONS


TSSOP-16  
DT SUFFIX  
CASE 948F-01  
ISSUE B

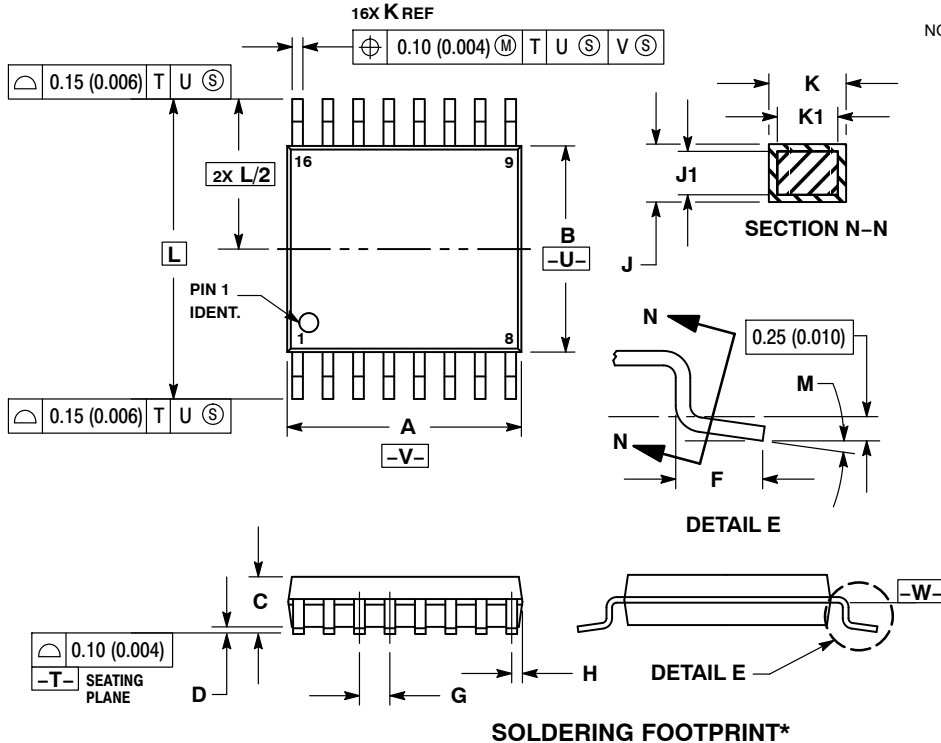

### NOTES:

1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
2. CONTROLLING DIMENSION: MILLIMETER.
3. DIMENSION A DOES NOT INCLUDE MOLD FLASH, PROTRUSIONS OR GATE BURRS. MOLD FLASH OR GATE BURRS SHALL NOT EXCEED 0.15 (0.006) PER SIDE.
4. DIMENSION B DOES NOT INCLUDE INTERLEAD FLASH OR PROTRUSION. INTERLEAD FLASH OR PROTRUSION SHALL NOT EXCEED 0.25 (0.010) PER SIDE.
5. DIMENSION K DOES NOT INCLUDE DAMBAR PROTRUSION. ALLOWABLE DAMBAR PROTRUSION SHALL BE 0.08 (0.003) TOTAL IN EXCESS OF THE K DIMENSION AT MAXIMUM MATERIAL CONDITION.
6. TERMINAL NUMBERS ARE SHOWN FOR REFERENCE ONLY.
7. DIMENSION A AND B ARE TO BE DETERMINED AT DATUM PLANE -W-

| DIM | MILLIMETERS |      | INCHES    |       |
|-----|-------------|------|-----------|-------|
|     | MIN         | MAX  | MIN       | MAX   |
| A   | 4.90        | 5.10 | 0.193     | 0.200 |
| B   | 4.30        | 4.50 | 0.169     | 0.177 |
| C   | ---         | 1.20 | ---       | 0.047 |
| D   | 0.05        | 0.15 | 0.002     | 0.006 |
| F   | 0.50        | 0.75 | 0.020     | 0.030 |
| G   | 0.65 BSC    |      | 0.026 BSC |       |
| H   | 0.18        | 0.28 | 0.007     | 0.011 |
| J   | 0.09        | 0.20 | 0.004     | 0.008 |
| J1  | 0.09        | 0.16 | 0.004     | 0.006 |
| K   | 0.19        | 0.30 | 0.007     | 0.012 |
| K1  | 0.19        | 0.25 | 0.007     | 0.010 |
| L   | 6.40 BSC    |      | 0.252 BSC |       |
| M   | 0°          | 8°   | 0°        | 8°    |

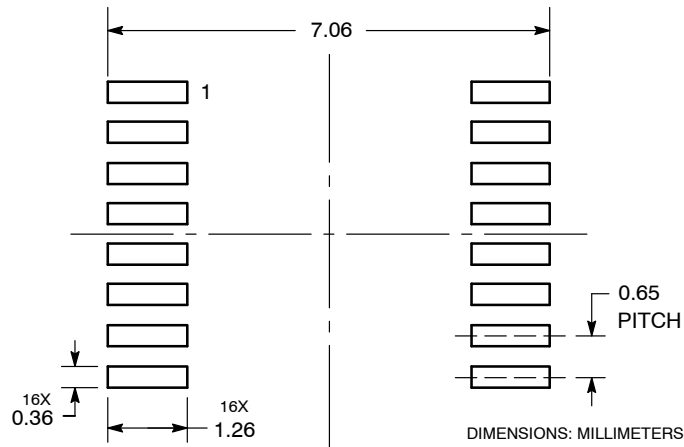

\*For additional information on our Pb-Free strategy and soldering details, please download the ON Semiconductor Soldering and Mounting Techniques Reference Manual, SOLDERRM/D.

**ON Semiconductor** and  are registered trademarks of Semiconductor Components Industries, LLC (SCILLC). SCILLC reserves the right to make changes without further notice to any products herein. SCILLC makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does SCILLC assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. "Typical" parameters which may be provided in SCILLC data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. SCILLC does not convey any license under its patent rights nor the rights of others. SCILLC products are not designed, intended, or authorized for use as components in systems intended for surgical implant into the body, or other applications intended to support or sustain life, or for any other application in which the failure of the SCILLC product could create a situation where personal injury or death may occur. Should Buyer purchase or use SCILLC products for any such unintended or unauthorized application, Buyer shall indemnify and hold SCILLC and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that SCILLC was negligent regarding the design or manufacture of the part. SCILLC is an Equal Opportunity/Affirmative Action Employer. This literature is subject to all applicable copyright laws and is not for resale in any manner.

## PUBLICATION ORDERING INFORMATION

### LITERATURE FULFILLMENT:

Literature Distribution Center for ON Semiconductor  
P.O. Box 5163, Denver, Colorado 80217 USA  
**Phone:** 303-675-2175 or 800-344-3860 Toll Free USA/Canada  
**Fax:** 303-675-2176 or 800-344-3867 Toll Free USA/Canada  
**Email:** [orderlit@onsemi.com](mailto:orderlit@onsemi.com)

**N. American Technical Support:** 800-282-9855 Toll Free  
USA/Canada

**Europe, Middle East and Africa Technical Support:**  
Phone: 421 33 790 2910

**Japan Customer Focus Center**  
Phone: 81-3-5817-1050

**ON Semiconductor Website:** [www.onsemi.com](http://www.onsemi.com)

**Order Literature:** <http://www.onsemi.com/orderlit>

For additional information, please contact your local  
Sales Representative



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



#### Как с нами связаться

**Телефон:** 8 (812) 309 58 32 (многоканальный)

**Факс:** 8 (812) 320-02-42

**Электронная почта:** [org@eplast1.ru](mailto:org@eplast1.ru)

**Адрес:** 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.