

Features

- 2:1 input voltage range
- 1.6kVDC isolation
- UL certified

Regulated Converter

- Efficiency up to 89%
- Six-sided continuous shield
- No minimum load required


RECOM DC/DC Converter

RP20-F

20 Watt

2" x 1"

Single and Dual Output

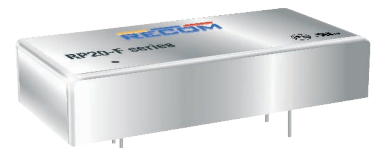

UL60950-1 certified

Description

The RP20-F series DC/DC converters are certified to UL 60950-1 and to cUL 60950-1. This makes them ideal for all telecom and industrial applications where approved safety standards are required. The industry standard 2" x 1" package meets military standards for thermal shock and vibration tolerance.


Selection Guide

| Part Number | Input Voltage Range [VDC] | Output Voltage [VDC] | Output Current [mA] | Input Current [mA] ⁽¹⁾ | Efficiency ⁽¹⁾ typ. [%] | Max. Capacitive Load ⁽²⁾ [µF] |
|-------------------------------|---------------------------|----------------------|---------------------|-----------------------------------|------------------------------------|--|
| RP20-123.3SF ^(3,4) | 9-18 | 3.3 | 5000 | 1618 | 85 | 13000 |
| RP20-1205SF ^(3,4) | 9-18 | 5 | 4000 | 1916 | 87 | 6800 |
| RP20-1212SF ^(3,4) | 9-18 | 12 | 1670 | 1942 | 86 | 2200 |
| RP20-1215SF ^(3,4) | 9-18 | 15 | 1330 | 1933 | 86 | 755 |
| RP20-243.3SF ^(3,4) | 18-36 | 3.3 | 5000 | 799 | 86 | 13000 |
| RP20-2405SF ^(3,4) | 18-36 | 5 | 4000 | 936 | 89 | 6800 |
| RP20-2412SF ^(3,4) | 18-36 | 12 | 1670 | 960 | 87 | 2200 |
| RP20-2415SF ^(3,4) | 18-36 | 15 | 1330 | 955 | 87 | 755 |
| RP20-483.3SF ^(3,4) | 36-75 | 3.3 | 5000 | 395 | 87 | 13000 |
| RP20-4805SF ^(3,4) | 36-75 | 5 | 4000 | 468 | 89 | 6800 |
| RP20-4812SF ^(3,4) | 36-75 | 12 | 1670 | 474 | 88 | 2200 |
| RP20-4815SF ^(3,4) | 36-75 | 15 | 1330 | 477 | 87 | 755 |
| RP20-1212DF ^(3,4) | 9-18 | ±12 | ±833 | 1937 | 86 | ±680 |
| RP20-1215DF ^(3,4) | 9-18 | ±15 | ±667 | 1938 | 86 | ±450 |
| RP20-2412DF ^(3,4) | 18-36 | ±12 | ±833 | 957 | 87 | ±680 |
| RP20-2415DF ^(3,4) | 18-36 | ±15 | ±667 | 947 | 88 | ±450 |
| RP20-4812DF ^(3,4) | 36-75 | ±12 | ±833 | 473 | 88 | ±680 |
| RP20-4815DF ^(3,4) | 36-75 | ±15 | ±667 | 473 | 88 | ±450 |

Notes:

- Note1: Maximum values at nominal input voltage and full load
 Note2: Max. Cap load is tested at minimum input and constant resistive load

Model Numbering

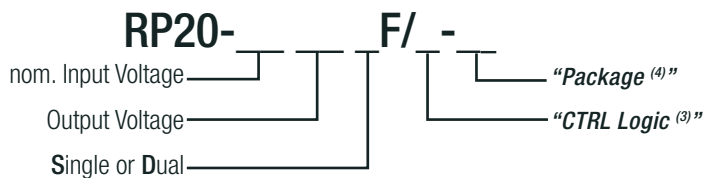

Notes:

- Note3: no suffix for CTRL function with positive logic (1=ON, 0=OFF)
 add suffix "N" for CTRL function with negative logic (0=ON, 1=OFF)
 Note4: add suffix "-HC" for premounted Heat-sink with clips

Ordering Examples

- RP20-2405SF = 24V input, 5V output, single, positive Logic CTRL pin
 RP20-4812DF/N-HC = 48V input, ±12V output, dual, negative Logic CTRL pin, Heat-sink premounted

Specifications (measured @ Ta= 25°C, nom. Vin, full load unless otherwise stated)



BASIC CHARACTERISTICS

| Parameter | Condition | | Min. | Typ. | Max. |
|---|--|--|--|--|--------------------------|
| Input Filter ⁽⁶⁾ | | | LC-Type | | |
| Input Voltage Range | nom. Vin = 12VDC nom. Vin = 24VDC nom. Vin = 48VDC | | 9VDC 18VDC 36VDC | 12VDC 24VDC 48VDC | 18VDC 36VDC 75VDC |
| Input Surge Voltage | 100ms max. | nom. Vin = 12VDC nom. Vin = 24VDC nom. Vin = 48VDC | | | 36VDC 50VDC 100VDC |
| Output Voltage Trimming | refer to „ OUTPUT VOLTAGE TRIMMING “ | | -10% | | +10% |
| Input Reflected Ripple Current ⁽⁶⁾ | | | | 20mA _{p-p} | |
| Minimum Load ⁽⁷⁾ | Single Dual | | 0% 10% | | |
| Start-up Time | Power up ON/OFF CTRL | | | 10ms 10ms | |
| ON/OFF CTRL ⁽⁸⁾ | Positive Logic | DC-DC ON DC-DC OFF | Open or 3.0VDC < V _{CTRL} < 12VDC Short or 0VDC < V _{CTRL} < 1.2VDC | | |
| | Negative Logic | DC-DC ON DC-DC OFF | Short or 0VDC < V _{CTRL} < 1.2VDC Open or 3.0VDC < V _{CTRL} < 12VDC | | |
| Input Current of CTRL pin | DC-DC ON | | -0.5mA | | +0.5mA |
| Standby Current | DC-DC OFF | | | 2.5mA | |
| Internal Operating Frequency | | | 450kHz | 500kHz | 550kHz |
| Ripple and Noise | measured at 20MHz BW with a 0.1µF/50V MLCC | 3.3V _{out} 5V _{out} , 12V _{out} , 15V _{out} | | 60mV _{p-p} 75mV _{p-p} | |
| | | ±12V _{out} , ±15V _{out} | | 100mV _{p-p} | |

Notes:

- Note5: An external filter capacitor is required for normal operation. The capacitor should be capable of handling 1A ripple current for 48V/24V models. RECOM suggest: Nippon chemi-con KY series, 220µF/100V, ESR 90m Ω
- Note6: Simulated source impedance of 12µH. 12µH inductor in series with +Vin
- Note7: The RP15-F series requires a minimum of 10% loading on the output to maintain specified regulation. Operation under no-load condition will not damage these devices, however they may not meet all listed specification
- Note8: The ON/OFF control function can be positive or negative logic. The pin voltage is referenced to -Vin pin



RP20-1205SF

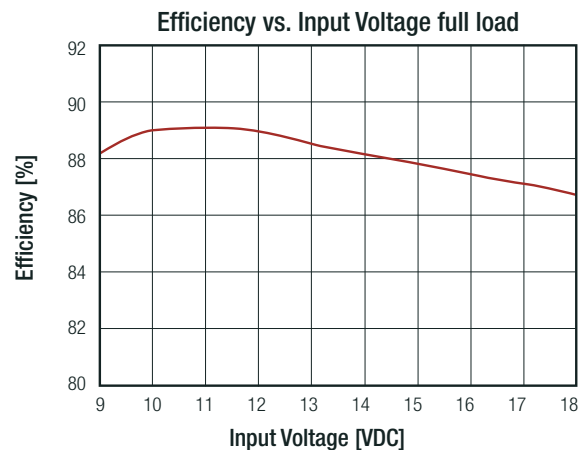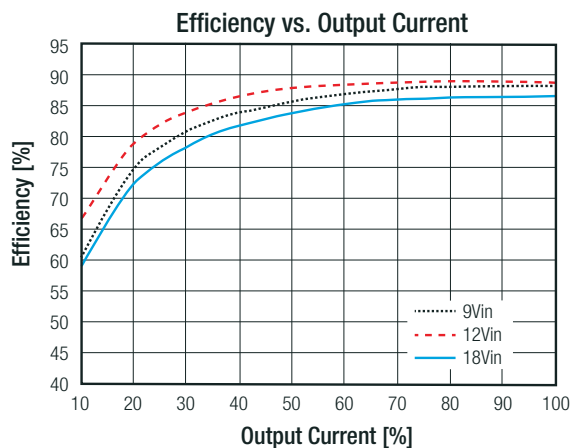



continued on next page

Specifications (measured @ Ta= 25°C, nom. Vin, full load unless otherwise stated)

RP20-2405SF

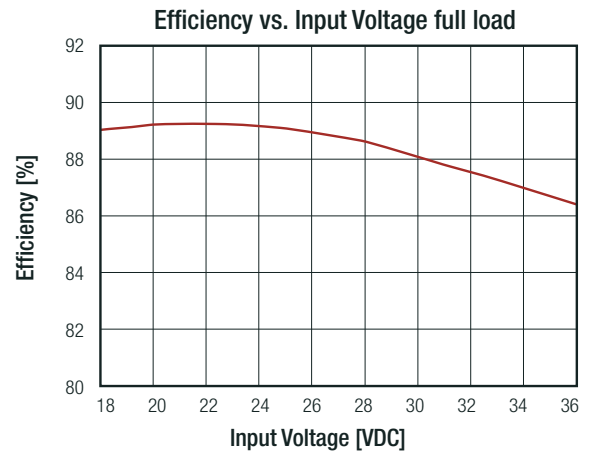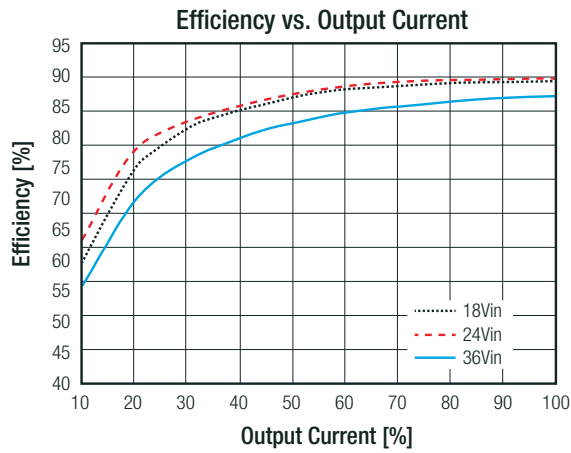


RP20-4805SF

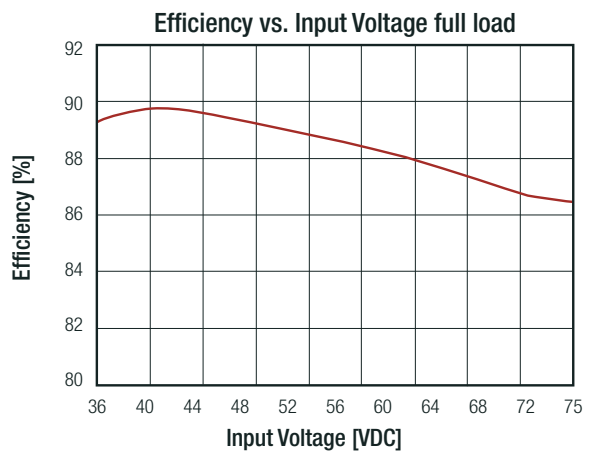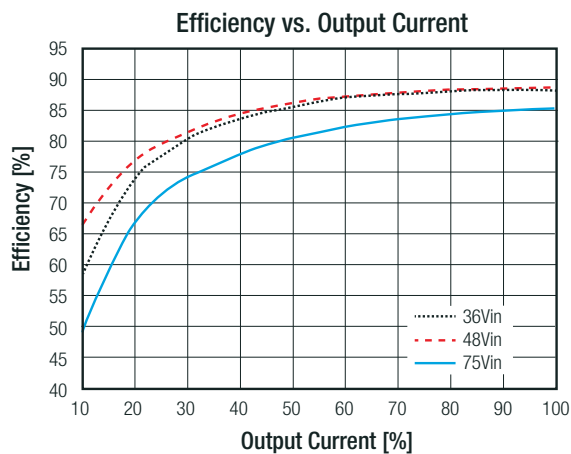

OUTPUT VOLTAGE TRIMMING

Output Voltage Trimming

Single output Powerline converters offer the feature of trimming the output voltage over a certain range around the nominal value by using external trim resistors. No general equation can be given for calculating the trim resistors, but the following trimtables give typical values for choosing these trimming resistors. If voltages between the given trim points are required, extrapolate between the two nearest given values to work out the resistor required or use a variable resistor to set the output voltage. Output can be externally trimmed by using the method shown below.

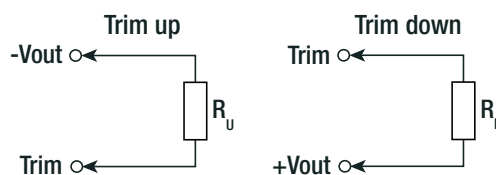

continued on next page

Specifications (measured @ Ta= 25°C, nom. Vin, full load unless otherwise stated)

| RP20-xx3.3SF | | | | | | | | | | | |
|------------------|--------|--------|--------|-------|-------|-------|-------|-------|-------|-------|-------|
| Trim up | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | [%] |
| Vout = | 3.333 | 3.366 | 3.399 | 3.432 | 3.465 | 3.498 | 3.531 | 3.564 | 3.597 | 3.63 | [VDC] |
| R _u = | 57.93 | 26.16 | 15.58 | 10.28 | 7.11 | 4.99 | 3.48 | 2.34 | 1.46 | 0.75 | [kΩ] |
| | | | | | | | | | | | |
| Trim down | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | [%] |
| Vout = | 3.267 | 3.234 | 3.201 | 3.168 | 3.135 | 3.102 | 3.069 | 3.036 | 3.003 | 2.97 | [VDC] |
| R _d = | 69.47 | 31.23 | 18.49 | 12.12 | 8.29 | 5.74 | 3.92 | 2.56 | 1.50 | 0.65 | [kΩ] |
| | | | | | | | | | | | |
| RP20-xx05SF | | | | | | | | | | | |
| Trim up | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | [%] |
| Vout = | 5.05 | 5.01 | 5.15 | 5.20 | 5.25 | 5.30 | 5.35 | 5.4 | 5.45 | 5.50 | [VDC] |
| R _u = | 36.57 | 16.58 | 9.92 | 6.58 | 4.59 | 3.25 | 2.30 | 1.59 | 1.03 | 0.59 | [kΩ] |
| | | | | | | | | | | | |
| Trim down | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | [%] |
| Vout = | 4.95 | 4.90 | 4.85 | 4.80 | 4.75 | 4.70 | 4.65 | 4.60 | 4.55 | 4.50 | [VDC] |
| R _d = | 45.53 | 20.61 | 12.31 | 8.15 | 5.66 | 4.00 | 2.81 | 1.92 | 1.23 | 0.68 | [kΩ] |
| | | | | | | | | | | | |
| RP20-xx12SF | | | | | | | | | | | |
| Trim up | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | [%] |
| Vout = | 12.12 | 12.24 | 12.36 | 12.48 | 12.60 | 12.72 | 12.84 | 12.96 | 13.08 | 13.20 | [VDC] |
| R _u = | 367.91 | 165.95 | 98.64 | 64.98 | 44.78 | 31.32 | 21.70 | 14.49 | 8.88 | 4.39 | [kΩ] |
| | | | | | | | | | | | |
| Trim down | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | [%] |
| Vout = | 11.88 | 11.76 | 11.64 | 11.52 | 11.40 | 11.28 | 11.16 | 11.04 | 10.92 | 10.8 | [VDC] |
| R _d = | 460.99 | 207.95 | 123.60 | 81.42 | 56.12 | 39.25 | 27.20 | 18.16 | 11.13 | 5.51 | [kΩ] |
| | | | | | | | | | | | |
| RP20-xx15SF | | | | | | | | | | | |
| Trim up | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | [%] |
| Vout = | 15.15 | 15.3 | 15.45 | 15.60 | 15.75 | 15.90 | 16.05 | 16.20 | 16.35 | 16.50 | [VDC] |
| R _u = | 404.18 | 180.59 | 106.06 | 68.80 | 46.44 | 31.53 | 20.88 | 12.90 | 6.69 | 1.72 | [kΩ] |
| | | | | | | | | | | | |
| Trim down | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | [%] |
| Vout = | 14.85 | 14.70 | 14.55 | 14.40 | 14.25 | 14.10 | 13.95 | 13.80 | 13.65 | 13.50 | [VDC] |
| R _d = | 499.82 | 223.41 | 131.27 | 85.20 | 57.56 | 39.14 | 25.97 | 16.10 | 8.42 | 2.282 | [kΩ] |



| REGULATIONS | | |
|----------------------------------|----------------------------------|------------|
| Parameter | Condition | Value |
| Output Accuracy | | ±1.0% |
| Line Regulation | low line to high line, full load | ±0.2% |
| Load Regulation | 0% to 100% load | ±0.5% |
| Cross Regulation | asymmetrical 25%<->100% load | ±5.0% |
| Transient Response Recovery Time | 25% load step change | 250µs typ. |

Specifications (measured @ Ta= 25°C, nom. Vin, full load unless otherwise stated)

| PROTECTIONS | | | |
|---|--------------------|---------|--------------------------------|
| Parameter | Condition | | Value |
| Short Circuit Protection (SCP) | | | continuous, automatic recovery |
| Over Voltage Protection (OVP) | zener diode clamp | 3.3Vout | 3.9VDC |
| | | 5Vout | 6.2VDC |
| | | 12Vout | 15VDC |
| | | 15Vout | 18VDC |
| Over Load Protection (OLP) | % of Iout rated | | 150% typ. |
| Isolation Voltage ⁽⁹⁾ | I/P to O/P | | 1.6kVDC/ 1 minute |
| | I/P to O/P to case | | 1.6kVDC/ 1 minute |
| Isolation Resistance | Viso= 500VDC | | 1GΩ min. |
| Isolation Capacitance | | | 1000pF max. |
| Notes: | | | |
| Note9: For repeat Hi-Pot testing, reduce the time and/or the test voltage | | | |
| Note10: This power module is not internally fused. An input line fuse must always be used | | | |

| ENVIRONMENTAL | | | |
|-----------------------------|--|-------------------|------------------------------|
| Parameter | Condition | | Value |
| Operating Temperature Range | without derating | | -40°C to +70°C |
| | with derating | | -40°C to +100°C |
| Maximum Case Temperature | | | +100°C |
| Temperature Coefficient | | | ±0.02%/K max. |
| Thermal Impedance | @ natural convection | without heat-sink | 12K/W |
| | 0.1 m/s | with heat-sink | 10K/W |
| Operating Altitude | | | 2000m |
| Operating Humidity | non-condensing | | 5% - 95% RH |
| Pollution Degree | | | PD2 |
| Thermal Shock | | | according to MIL-STD-810F |
| Vibration | | | according to MIL-STD-810F |
| MTBF | MIL-HDBK-217F, G.B. | | 1583 x 10 ³ hours |
| | Bellcore TR-NWT-000332 ⁽¹¹⁾ | | 1791 x 10 ³ hours |

Derating Graph ⁽¹²⁾

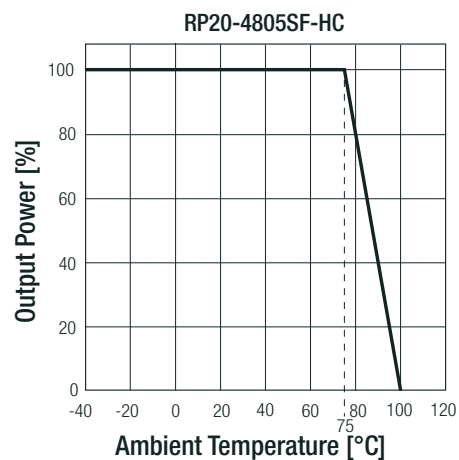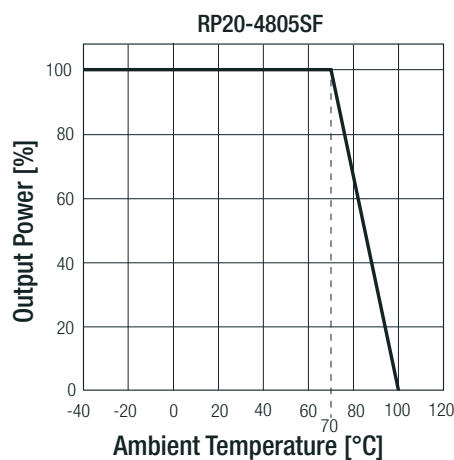

Notes:

Note11: BELLCORE TR-NWT-000332. Case I: 50% Stress, Temperature at 40°C (Ground fixed and controlled environment)

Note12: Derating graphs are valid only for the shown part numbers. If you need detailed derating-information about a part-number not shown here please contact RECOM Techsupport for detailed information

Specifications (measured @ Ta= 25°C, nom. Vin, full load unless otherwise stated)

SAFETY AND CERTIFICATIONS


| Certificate Type (Safety) | Condition | Standard |
|---|-----------|---|
| Information Technology Equipment, General Requirements for Safety | E196683 | UL60950-1, 2nd Edition, 2011 CAN/CSA-C22.2 No. 60950-1-03, 2nd Edition, 2011 |
| RoHS 2 | | RoHS-2011/65/EU + AM-2015/863 |

| EMC Compliance | Condition | Standard / Criterion |
|---|---|-------------------------|
| Electromagnetic compatibility of multimedia equipment - Emission requirements | with external filter (see filter suggestion below) | EN55032, Class A and B |
| ESD Electrostatic discharge immunity test | Air ±8kV and Contact ±6kV | EN61000-4-2, Criteria B |
| Radiated, radio-frequency, electromagnetic field immunity test | 10 V/m | EN61000-4-3, Criteria A |
| Fast Transient and Burst Immunity ⁽¹³⁾ | ±2kV | EN61000-4-4, Criteria B |
| Surge Immunity ⁽¹³⁾ | ±1kV | EN61000-4-5, Criteria A |
| Immunity to conducted disturbances, induced by radio-frequency fields | 10 Vr.m.s | EN61000-4-6, Criteria A |
| Power Magnetic Field Immunity | 100A/m continuous; 1000A/m 1s | EN61000-4-8, Criteria A |

Notes:


Note13: An external input filter capacitor is required if the module has to meet EN61000-4-4, EN61000-4-5
 Recom suggests Nippon chemi-con KY series 220µF/100V

EMC Filtering Suggestions according to EN55032

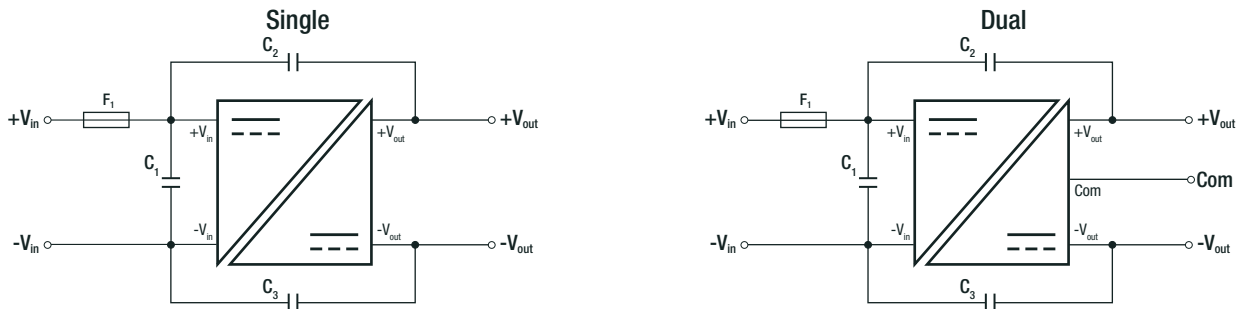

Component List Class A

| MODEL | C1 | C2 | C3 |
|--------------------------|-----------------------|-----------------------|-----------------------|
| RP20-12xxSF, RP20-12xxDF | 4.7µF/50V, 1812 MLCC | 1000pF/2kV, 1808 MLCC | 1000pF/2kV, 1808 MLCC |
| RP20-24xxSF, RP20-24xxDF | 2.2µF/50V, 1812 MLCC | 1000pF/2kV, 1808 MLCC | 1000pF/2kV, 1808 MLCC |
| RP20-48xxSF, RP20-48xxDF | 2.2µF/100V, 1812 MLCC | 1000pF/2kV, 1808 MLCC | 1000pF/2kV, 1808 MLCC |

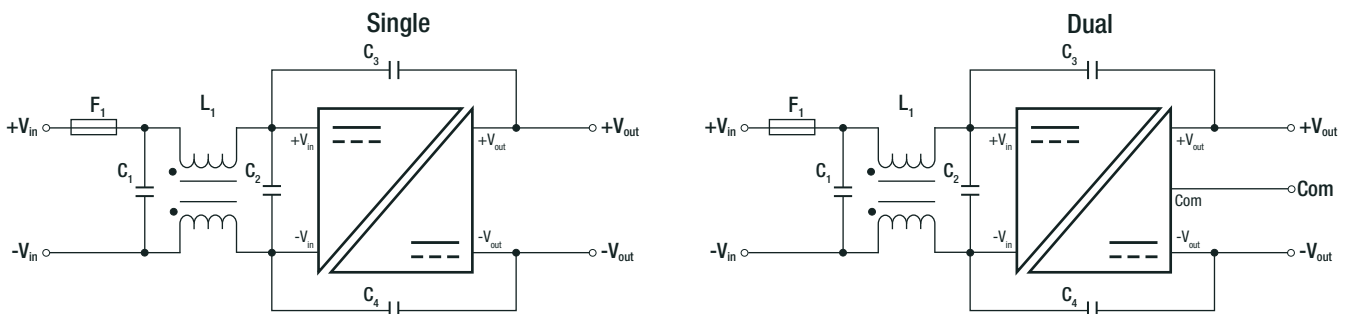

Component List Class B




| MODEL | C1 | C2 | C3/C4 | L1 |
|-------------|------------|------------|------------|-----------------------------------|
| RP20-12xxSF | 3.3µF/50V | 3.3µF/50V | 1000pF/2kV | CMC: 450µH |
| RP20-12xxDF | 1812 MLCC | 1812 MLCC | 1808 MLCC | ref.: WE 74482270005 ref.: CMC-05 |
| RP20-24xxSF | 4.7µF/50V | N/A | 1000pF/2kV | CMC: 450µH |
| RP20-24xxDF | 1812 MLCC | | 1808 MLCC | ref.: WE 74482270005 ref.: CMC-05 |
| RP20-48xxSF | 2.2µF/100V | 2.2µF/100V | 1000pF/2kV | CMC: 450µH |
| RP20-48xxDF | 1812 MLCC | 1812 MLCC | 1808 MLCC | ref.: WE 74482270005 ref.: CMC-05 |

Specifications (measured @ Ta= 25°C, nom. Vin, full load unless otherwise stated)

DIMENSIONS and PHYSICAL CHARACTERISTICS

| Parameter | Type | Value |
|--------------------|-------------------|------------------------------|
| Material | case | nickel coated copper |
| | base | non-conductive black plastic |
| | potting | epoxy (UL94V-0) |
| Dimensions (LxWxH) | without Heat-sink | 50.8 x 25.4 x 10.2mm |
| | with Heat-sink | 56.8 x 25.4 x 16.8mm |
| Weight | without Heat-sink | 27g |
| | with Heat-sink | 37.89g |



Dimension Drawing (mm)

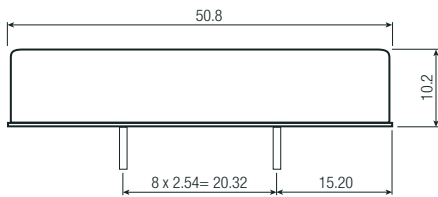




Pinning Information

| Pin # | Single | Dual |
|-------|---------------------|---------------------|
| 1 | +Vin | +Vin |
| 2 | -Vin | -Vin |
| 3 | +Vout | +Vout |
| 4 | Trim | Com |
| 5 | -Vout | -Vout |
| 6 | CTRL ⁽³⁾ | CTRL ⁽³⁾ |

Tolerance: xx.x= ±0.5mm
xx.xx= ±0.25mm

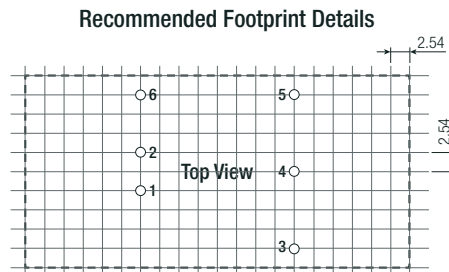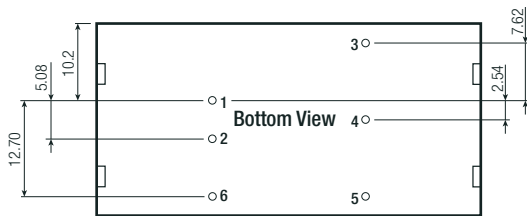

Dimension Drawing with Heat-sink (mm)

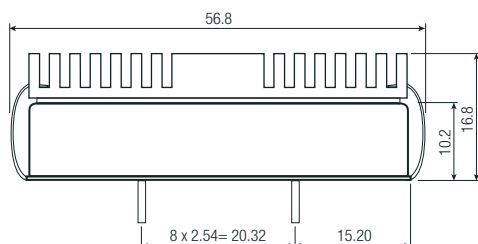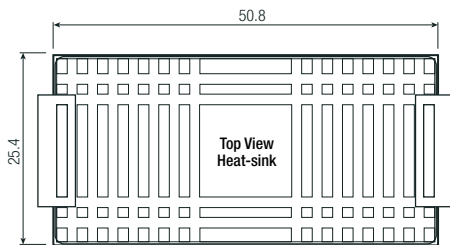

Specifications (measured @ Ta= 25°C, nom. Vin, full load unless otherwise stated)

| PACKAGING INFORMATION | | | |
|-----------------------------|----------------|-------------------|------------------------|
| Parameter | Type | | Value |
| Packaging Dimension (LxWxH) | tube | without heat-sink | 255.0 x 54.0 x 22.0mm |
| | tray | with heat-sink | 302.5 x 222.0 x 20.0mm |
| Packaging Quantity | tube | without heat-sink | 9pcs |
| | tray | with heat-sink | 20pcs |
| Storage Temperature Range | | | -55°C to +125°C |
| Storage Humidity | non-condensing | | 5% - 95% RH |

The product information and specifications may be subject to changes even without prior written notice. The product has been designed for various applications; its suitability lies in the responsibility of each customer. The products are not authorized for use in safety-critical applications without RECOM's explicit written consent. A safety-critical application is an application where a failure may reasonably be expected to endanger or cause loss of life, inflict bodily harm or damage property. The applicant shall indemnify and hold harmless RECOM, its affiliated companies and its representatives against any damage claims in connection with the unauthorized use of RECOM products in such safety-critical applications.



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.