STANDARD PACK 1,000/BAG

HEYClip™ Snap Rivets

- Designed for **fast and easy installation with no tools** - just fingertip pressure required.
- Simply place rivet into the hole and press down on the head to fasten; legs expand to securely fasten components.
- To release, simply pull up on rivet head section.
- Round head provides a clean, finished look.
- Part Description Key: PR X-Y where X = Mounting Hole Diameter (inches) and Y = minimum Panel Thickness (inches).
- Standard Material: Nylon 6. Nylon 6/6 UL 94V-0 available by special order, consult Heyco.
- Standard Pack - 1,000/bag.

WILL FIT THESE PANELS						PART NO.			DESCRIPTION	PART DIMENSIONS						EXTRACTION FORCE	
MOUNTING HOLE DIA.		ASSEMBLED PANEL THICKNESS								A Length		B Head Height		C Head Diameter			
		Min.		Max.				V-0									Style
in.	mm.	in.	mm.	in.	mm.	Black	White	Black *		in.	mm.	in.	mm.	in.	mm.	N	
PR Series																	
.083	2,1	.02	0,5	.05	1,3	**9296**	**9297**	**9296F**	PR 083-024	.10	2,5	.05	1,3	.17	4,3	29	2
		.05	1,3	.08	2,0	**9300**	**9301**	**9300F**	PR 083-051	.13	3,3						
		.08	2,0	.11	2,8	**9302**	**9303**	**9302F**	PR 083-083	.16	4,1						
		.11	2,8	.14	3,6	**9304**	**9305**	**9304F**	PR 083-114	.19	4,8						
		.15	3,8	.17	4,3	**9306**	**9307**	**9306F**	PR 083-146	.22	5,6						
		.17	4,3	.20	5,1	**9308**	**9309**	**9308F**	PR 083-173	.25	6,4						
.102	2,6	.04	1,0	.08	2,0	**9020**	**9021**	**9020F**	PR 102-039	.13	3,3	.06	1,5	.20	5,1	49	2
		.08	2,0	.12	3,0	**9022**	**9023**	**9022F**	PR 102-082	.17	4,3						
		.11	2,8	.14	3,6	**9024**	**9025**	**9024F**	PR 102-106	.19	4,8						
		.13	3,3	.17	4,3	**9026**	**9027**	**9026F**	PR 102-134	.22	5,6						
		.17	4,3	.21	5,3	**9310**	**9311**	**9310F**	PR 102-169	.25	6,4						
		.20	5,1	.24	6,1	**9312**	**9313**	**9312F**	PR 102-201	.28	7,1						
.106	2,7	.13	3,3	.17	4,3	**19000**	**19001**	**19000F**	PR 106-133	.23	5,8	.06	1,5	.20	5,1	49	NEW!
.118	3,0	.14	3,5	.18	4,6	**19002**	**19003**	**19002F**	PR 118-137	.30	7,6	.07	1,8	.24	6,1	122	2 NEW!
		.14	3,5	.22	5,6	**19004**	**19005**	**19004F**	PR 118-138	.31	7,9	.06	1,5	.24	6,1		NEW!
.122	3,1	.04	1,0	.08	2,0	**9028**	**9029**	**9028F**	PR 122-039	.14	3,5	.06	1,5	.25	6,4	78	2
		.08	2,0	.12	3,0	**9030**	**9031**	**9030F**	PR 122-079	.18	4,6						
		.12	3,0	.16	4,1	**9032**	**9033**	**9032F**	PR 122-118	.22	5,6						
		.16	4,1	.19	4,8	**9034**	**9035**	**9034F**	PR 122-157	.26	6,6						
		.20	5,1	.24	6,1	**9036**	**9037**	**9036F**	PR 122-197	.30	7,6						
		.22	5,5	.26	6,6	**9038**	**9039**	**9038F**	PR 122-217	.32	8,1						
		.26	6,6	.30	7,6	**9040**	**9041**	**9040F**	PR 122-256	.35	8,9						
		.30	7,6	.34	8,6	**9042**	**9043**	**9042F**	PR 122-295	.39	9,9						
		.45	11,4	.51	13,0	**9314**	**9315**	**9314F**	PR 122-453	.57	14,5						
		.81	20,6	.85	21,6	**9316**	**9317**	**9316F**	PR 122-807	.91	23,1						
.142	3,6	.05	1,3	.08	2,0	**9044**	**9045**	**9044F**	PR 142-047	.14	3,5	.06	1,5	.25	6,4	118	1
		.08	2,0	.12	3,0	**9046**	**9047**	**9046F**	PR 142-083	.18	4,6						
		.11	2,8	.14	3,6	**9048**	**9049**	**9048F**	PR 142-106	.20	5,1						
		.12	3,0	.16	4,1	**9050**	**9051**	**9050F**	PR 142-118	.22	5,6						
		.15	3,8	.18	4,6	**9052**	**9053**	**9052F**	PR 142-146	.24	6,1						
		.18	4,6	.22	5,6	**9054**	**9055**	**9054F**	PR 142-177	.28	7,1						
		.22	5,6	.26	6,6	**9056**	**9057**	**9056F**	PR 142-217	.32	8,1						
.157	4,0	.09	2,3	.11	2,8	**19006**	**19007**	**19006F**	PR 157-086	.22	5,6	.08	2,0	.31	7,9	196	1 NEW!
		.21	5,3	.24	6,1	**19008**	**19009**	**19008F**	PR 157-212	.31	7,9	.07	1,8	.32	8,1		NEW!
		.41	10,4	.45	11,4	**19010**	**19011**	**19010F**	PR 157-413	.53	13,5	.08	2,0	.31	7,9	196	2 NEW!
.161	4,1	.10	2,5	.14	3,5	**9058**	**9059**	**9058F**	PR 161-098	.20	5,1	.07	1,8	.32	8,1	196	1
		.14	3,5	.18	4,6	**9060**	**9061**	**9060F**	PR 161-138	.24	6,1						
		.18	4,6	.22	5,6	**9062**	**9063**	**9062F**	PR 161-177	.28	7,1						
		.22	5,6	.26	6,6	**9064**	**9065**	**9064F**	PR 161-217	.32	8,1						
		.26	6,6	.30	7,6	**9066**	**9067**	**9066F**	PR 161-256	.35	8,9						
		.30	7,6	.34	8,6	**9068**	**9069**	**9068F**	PR 161-295	.39	9,9						
		.35	8,9	.41	10,4	**9318**	**9319**	**9318F**	PR 161-354	.47	11,9						
		.49	12,4	.55	14,0	**9320**	**9321**	**9320F**	PR 161-492	.61	15,5						

Standard colors black and white.
*Black nylon 6/6 UL 94V-0.

Available in Small Packs NEW

PART NO. Black	PART NO. White	DESCRIPTION	QTY
9028-P	**9029-P**	PR 122-039 100PK	100
9030-P	**9031-P**	PR 122-079 100PK	
9032-P	**9033-P**	PR 122-118 100PK	
9034-P	**9035-P**	PR 122-157 100PK	
9036-P	**9037-P**	PR 122-197 100PK	
9038-P	**9039-P**	PR 122-217 100PK	
9058-P	**9059-P**	PR 161-098 50PK	50
9060-P	**9061-P**	PR 161-138 50PK	
9062-P	**9063-P**	PR 161-177 50PK	
9064-P	**9065-P**	PR 161-217 50PK	
9066-P	**9067-P**	PR 161-256 50PK	
9068-P	**9069-P**	PR 161-295 50PK	
9074-P	**9075-P**	PR 201-138 50PK	
9076-P	**9077-P**	PR 201-177 50PK	
9078-P	**9079-P**	PR 201-217 50PK	
9080-P	**9081-P**	PR 201-256 50PK	
9082-P	**9083-P**	PR 201-295 50PK	
9084-P	**9085-P**	PR 240-098 20PK	20
9324-P	**9325-P**	PR 240-138 20PK	

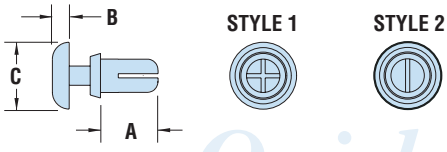

Quick Specs

Material	Nylon 6 UL V-2
Flammability Rating	94V-2
Temperature Range	-40°F (-40°C) to 239°F (115°C)

1-800-526-4182 • 732-286-1800 (NJ) • FAX: 732-244-8843 • www.heyco.com

STANDARD PACK 1,000/BAG

HEYClip™ Snap Rivets – continued

WILL FIT THESE PANELS MOUNTING HOLE DIA.		ASSEMBLED PANEL THICKNESS Min.		Max.		PART NO. Black	White	V-0 Black *	DESCRIPTION	PART DIMENSIONS A Length		B Head Height		C Head Diameter		EXTRACTION FORCE	Style
in.	mm.	in.	mm.	in.	mm.					in.	mm.	in.	mm.	in.	mm.	N	
PR Series																	
		.06	1,5	.10	2,5	**9070**	**9071**	**9070F**	PR 201-059	.18	4,6						
		.10	2,5	.14	3,5	**9072**	**9073**	**9072F**	PR 201-098	.22	5,6						
		.14	3,5	.18	4,6	**9074**	**9075**	**9074F**	PR 201-138	.26	6,6						
.201	5,1	.18	4,6	.22	5,6	**9076**	**9077**	**9076F**	PR 201-177	.30	7,6	.09	2,3	.35	8,9	245	
		.22	5,6	.26	6,6	**9078**	**9079**	**9078F**	PR 201-217	.34	8,6						
		.26	6,6	.30	7,6	**9080**	**9081**	**9080F**	PR 201-256	.37	9,4						
		.30	7,6	.34	8,6	**9082**	**9083**	**9082F**	PR 201-295	.41	10,4						
.232	5,9	.12	3,0	.16	4,1	**9322**	**9323**	**9322F**	PR 232-118	.25	6,4	.11	2,8	.47	11,9		1
.240	6,1	.10	2,5	.16	4,1	**9084**	**9085**	**9084F**	PR 240-098	.24	6,1	.10	2,5	.47	11,9	294	
		.14	3,5	.22	5,6	**9324**	**9325**	**9324F**	PR 240-138	.32	8,1	.12	3,0				

Standard colors black and white.
*Black nylon 6/6 UL 94V-0.

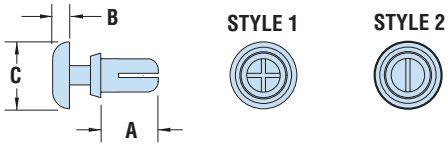

- Designed for **fast and easy installation with no tools** - just fingertip pressure required.
- Simply place rivet into the hole and press down on the head to fasten; legs expand to securely fasten components.
- To release, simply pull up on rivet head section.
- Round head provides a clean, finished look.
- Part Description Key: PR X-Y where X = Mounting Hole Diameter (inches) and Y = minimum Panel Thickness (inches).
- Standard Material: Nylon 6. Nylon 6/6 UL 94V-0 available by special order, consult Heyco.
- Standard Pack - 1,000/bag.
- See Quick Specs on opposite page.

HEYClip™ Heat Resistant Snap Rivets

WILL FIT THESE PANELS MOUNTING HOLE DIA.		ASSEMBLED PANEL THICKNESS Min.		Max.		PART NO. Tan Nylon 4/6 UL94V-2	DESCRIPTION	PART DIMENSIONS A Length		B Head Height		C Head Diameter		EXTRACTION FORCE	Style
in.	mm.	in.	mm.	in.	mm.			in.	mm.	in.	mm.	in.	mm.	N	
PR Tan Series															
		.04	1,0	.08	2,0	**9028H**	PR 122-039 HR Tan	.14	3,5						
		.08	2,0	.12	3,0	**9030H**	PR 122-079 HR Tan	.18	4,5						
.122	3,1	.12	3,0	.16	4,0	**9032H**	PR 122-118 HR Tan	.22	5,6	.06	1,6	.25	6,4	78	2
		.16	4,0	.19	5,0	**9034H**	PR 122-157 HR Tan	.26	6,5						
		.22	5,5	.26	6,5	**9038H**	PR 122-217 HR Tan	.32	8,0						
		.05	1,2	.08	2,1	**9044H**	PR 142-047 HR Tan	.14	3,5						
.142	3,6	.08	2,1	.12	3,0	**9046H**	PR 142-083 HR Tan	.18	4,5	.06	1,6	.25	6,4	118	1
		.11	2,7	.14	3,6	**9048H**	PR 142-106 HR Tan	.20	5,0						
		.12	3,0	.16	4,0	**9050H**	PR 142-118 HR Tan	.22	5,6						
		.10	2,5	.14	3,5	**9058H**	PR 161-098 HR Tan	.20	5,0						
		.14	3,5	.18	4,5	**9060H**	PR 161-138 HR Tan	.24	6,0						
.161	4,1	.18	4,5	.22	5,5	**9062H**	PR 161-177 HR Tan	.28	7,0	.07	1,8	.32	8,0	196	1
		.22	5,5	.26	6,5	**9064H**	PR 161-217 HR Tan	.32	8,0						
		.30	7,5	.34	8,5	**9068H**	PR 161-295 HR Tan	.39	10,0						

Standard color tan (beige).

- Molded from Nylon 4/6 94V-2 - **heat resistant to 266°F (130°C)**.
- Automotive **tan** (beige) color.
- Designed for fast and easy installation with no tools - just fingertip pressure required.
- Simply place rivet into the hole and press down on the head to fasten; legs expand to securely fasten components.
- Part Description Key: PR X-Y where X = Mounting Hole Diameter (inches) and Y = minimum Panel Thickness (inches).
- Standard Pack - 1,000/bag.

Material	Nylon 4/6
Flammability Rating	94V-2
Temperature Range	-.4°F (-18°C) to 266°F (130°C)

Quick Specs

Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits,General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)
Факс: 8 (812) 320-02-42
Электронная почта: org@eplast1.ru
Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.