


Shielded connectors using twin crimp technology for in-vehicle application

GT13 Series

— Space-saving connectors for coaxial cables —

<In-line and PCB type.>

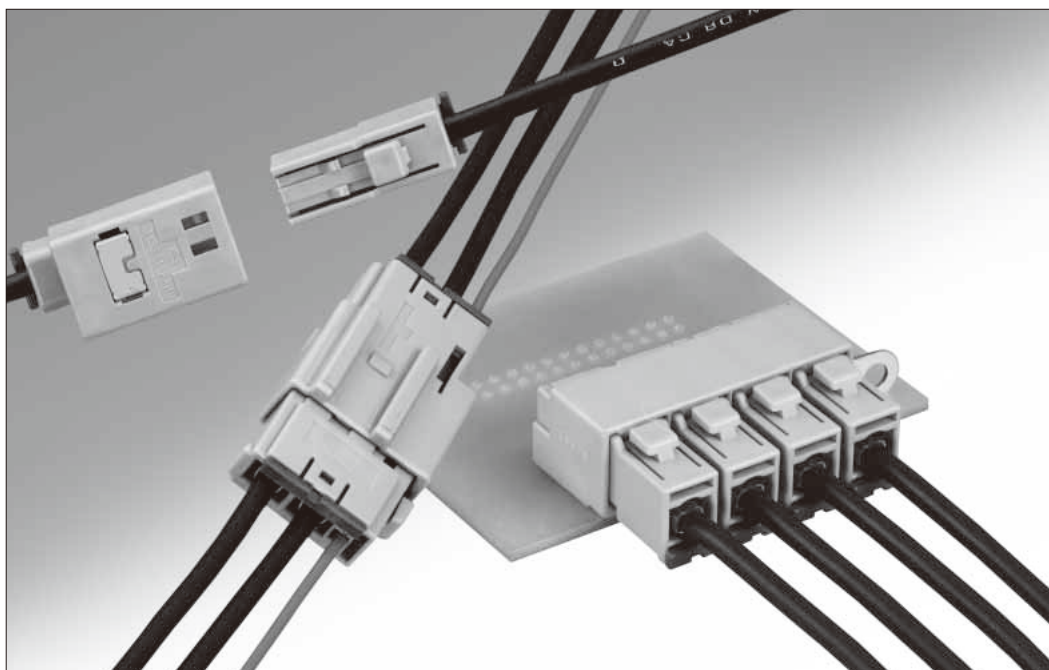


■ Features

- **Low cost cable assembly**
Highly efficient and reliable one step crimp termination allows high volume production with semi-automatic equipment.
- **Space-saving design**
Compact and light comparing to HRS GT5 series.

■ Applications


automotive audio systems.

F Terminals

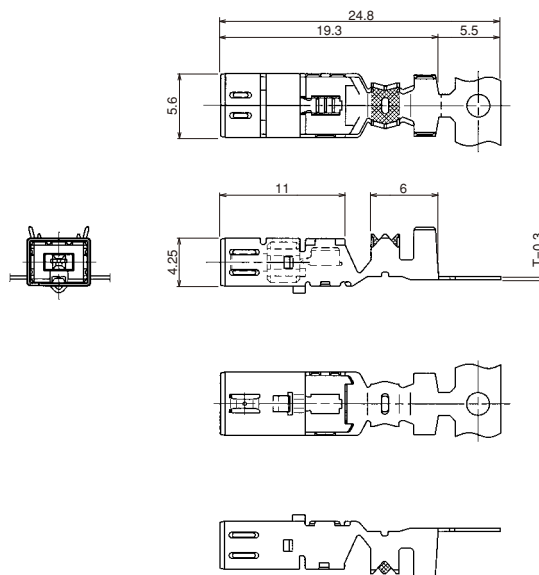



Part No.	HRS No.	Material／Plating or Color	Conductor Size (AWG)	Inner Insulation Diameter	Outer Diameter	Packaging	RoHS
GT13-2428/1.6-2.9SCF(70)	763-0001-3 70	Insulator : PBT／Dark Gray Center terminal : Copper alloy ／Tin plating Outer terminal : Copper alloy ／Tin plating	24 to 28 AWG	φ1.5 to 2.0	φ2.7 to 3.4	3,000 pcs /reel	YES
GT13-30/1.6-2.9SCF(70)	763-0012-0 70		30 AWG		φ2.3 to 2.7		
GT13-2428/1.6-2.5SCF(70)	763-0042-0 70		24 to 28 AWG	φ3.0 to 3.6	φ4.6 to 5.0	2,200 pcs /reel	
GT13-2428/F4-5SCF(70)	763-0051-1 70						
GT13-30/F4-5SCF(70)	763-0067-1 70		30 AWG	φ2.5 to 2.9	φ3.6 to 4.0		
GT13-30/F3.3-3.8SCF(70)	763-0052-4 70						
GT13-2022/F4-5SCF(70)	763-0068-4 70	20 to 22 AWG	φ3.0 to 3.6	φ4.6 to 5.0			

M Terminals

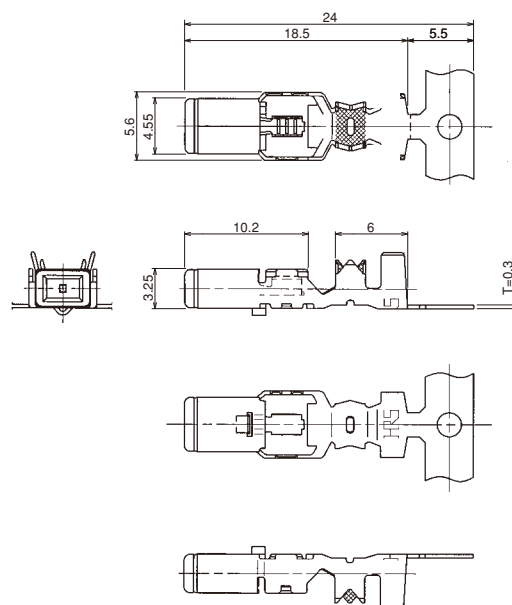

Part No.	HRS No.	Material／Plating or Color	Conductor Size (AWG)	Inner Insulation Diameter	Outer Diameter	Packaging	RoHS
GT13-2428/1.6-2.9PCF(70)	763-0002-6 70	Insulator : PBT／Dark Gray Center terminal : Copper alloy ／Tin plating Outer terminal : Copper alloy ／Tin plating	24 to 28 AWG	φ1.5 to 2.0	φ2.7 to 3.4	4,000 pcs /reel	YES
GT13-30/1.6-2.9PCF(70)	763-0041-8 70		30 AWG		φ2.3 to 2.7		
GT13-2428/1.6-2.5PCF(70)	763-0069-7 70		24 to 28 AWG	φ3.0 to 3.6	φ4.6 to 5.0	2,200 pcs /reel	
GT13-2428/F4-5PCF(70)	763-0054-0 70		30 AWG		φ3.6 to 4.0		
GT13-30/F4-5PCF(70)	763-0066-9 70			24 to 28 AWG			
GT13-30/F3.3-3.8PCF(70)	763-0053-7 70		20 to 22 AWG				
GT13-2428/F3.3-3.8PCF(70)	763-0079-0 70						
GT13-2022/F4-5PCF(70)	763-0070-6 70						



GT5

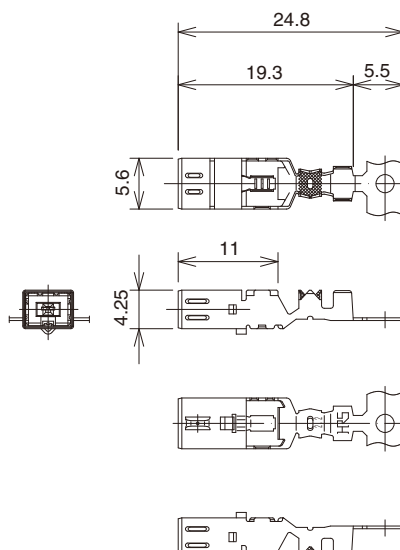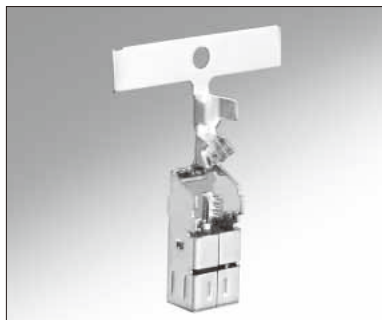


Part No.	HRS No.	Material/Plating or Color	Conductor Size (AWG)	Inner Insulation Diameter	Outer Diameter	Packaging	RoHS
GT13L-2428/1.1-2.2SCF	763-0115-2 00	Insulator : PBT/Dark Gray Center terminal : Copper alloy/ Tin plating Outer terminal : Copper alloy/ Tin plating	24 to 28 AWG	φ1.0 to 1.4	φ2.0 to 2.4	3,000 pcs/reel	YES

For Antenna

GT2

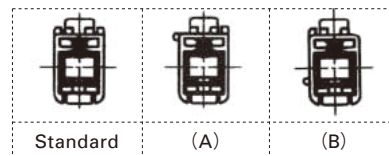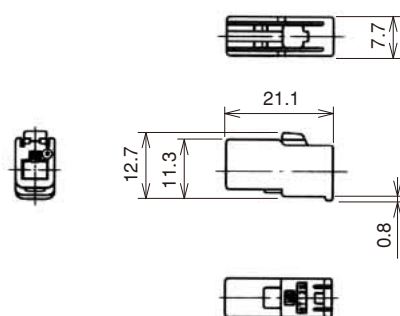


◆ Retainer assembled

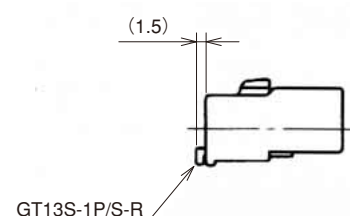


Part No.	HRS No.	Material	Color	Key polarizing code	Packaging	RoHS
GT13S-1S-HU	763-0024-9 00	PBT	Light Gray	Standard	1	YES
GT13S-1S-HU(A)	763-0025-1 00		Brown	(A)		
GT13S-1S-HU(B)	763-0026-4 00		Green	(B)		

M Housing (1 coaxial)

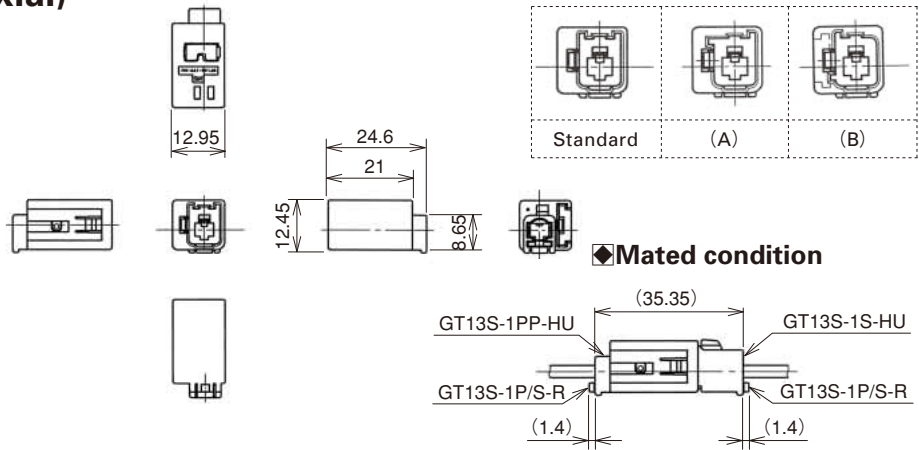


Part No.	HRS No.	Material/Plating	Color	Key polarizing code	Packaging	RoHS
GT13S-1PP-HU	763-0030-1 00	Housing : PBT Ground terminal : Copper alloy/Tin plating	Light Gray	Standard	1	YES
GT13S-1PP-HU(A)	763-0031-4 00		Brown	(A)		
GT13S-1PP-HU(B)	763-0032-7 00		Green	(B)		

Retainer

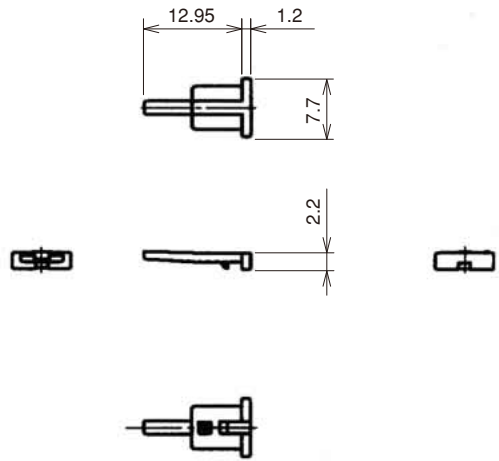


Part No.	HRS No.	Material	Color	Packaging	RoHS
GT13S-1P/S-R	763-0033-0 00	PBT	Dark Gray	1	YES

F Housing (1 coaxial) No retainer required type

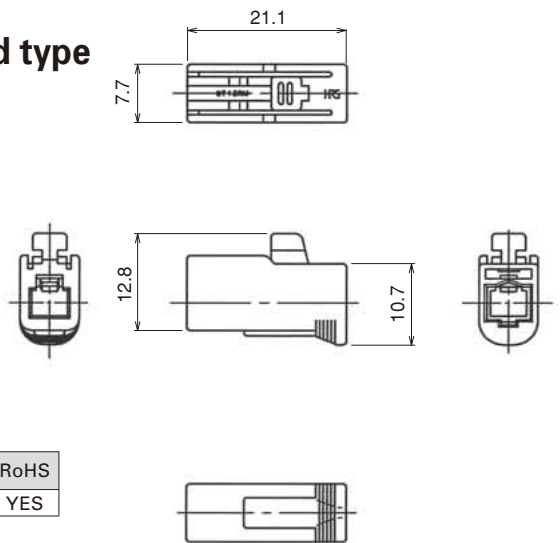


Part No.	HRS No.	Material	Color	Packaging	RoHS
GT13RM-1S-HU	763-0099-8 00	PBT	Light Gray	1	YES


Printed Circuit Board Type (1 coaxial)

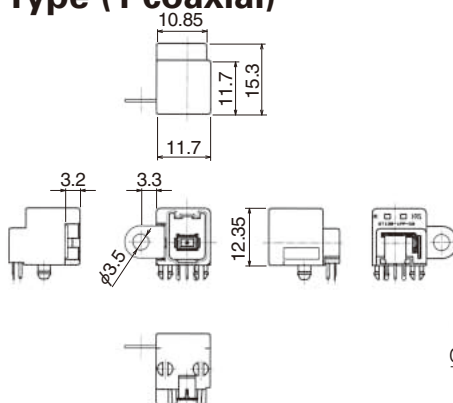


Recommended PCB pattern

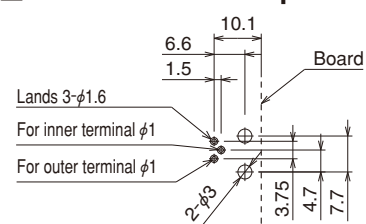

Mated condition

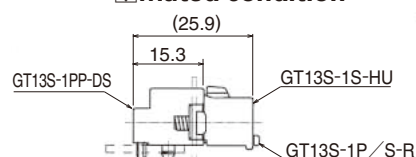


Recommended panel cutout dimension



Part No.	HRS No.	Material/Plating	Color	Key polarizing code	Packaging	RoHS
GT13S-1PP-DS	763-0027-7 00	Housing: PBT	Light Gray	Standard	1	YES
GT13S-1PP-DS(A)	763-0028-0 00	Center terminal: Copper alloy/Tin plating	Brown	(A)		
GT13S-1PP-DS(B)	763-0029-2 00	Outer terminal: Copper alloy/Tin plating Metal bracket: Copper alloy/Tin plating	Green	(B)		



GT13SC Series

F Connector Power Supply Terminal

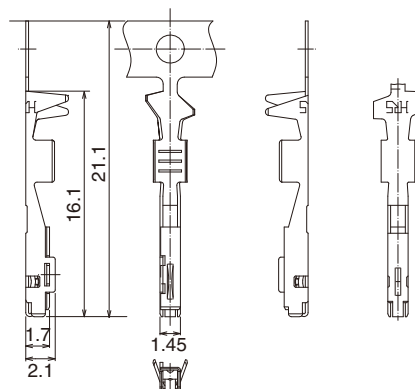



Part No.	HRS No.	Material	Plating	Conductor Size (AWG)	Outer Diameter	Packaging	RoHS
GT10A-2022SCF	760-0014-6	Copper alloy	Tin plating	20 to 22 AWG	φ2.0Max	8,000 pcs/reel	YES

M Connector Power Supply Terminal

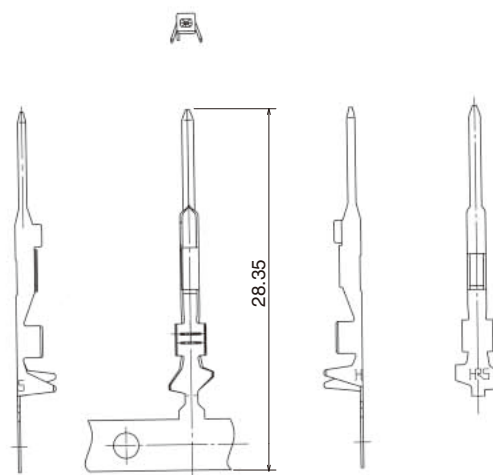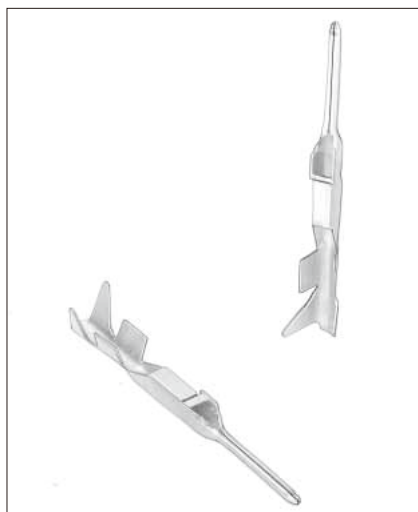

Part No.	HRS No.	Material	Plating	Conductor Size (AWG)	Outer Diameter	Packaging	RoHS
GT10SC-2022PCF	760-0016-1 00	Copper alloy	Tin plating	20 to 22 AWG	φ1.5 to 2.0	7,000 pcs/reel	YES
GT10A-2022PCF	760-0015-9 00				φ2.0Max	10,000 pcs/reel	



■ F Housing (1 Coaxial +1 Power contact)

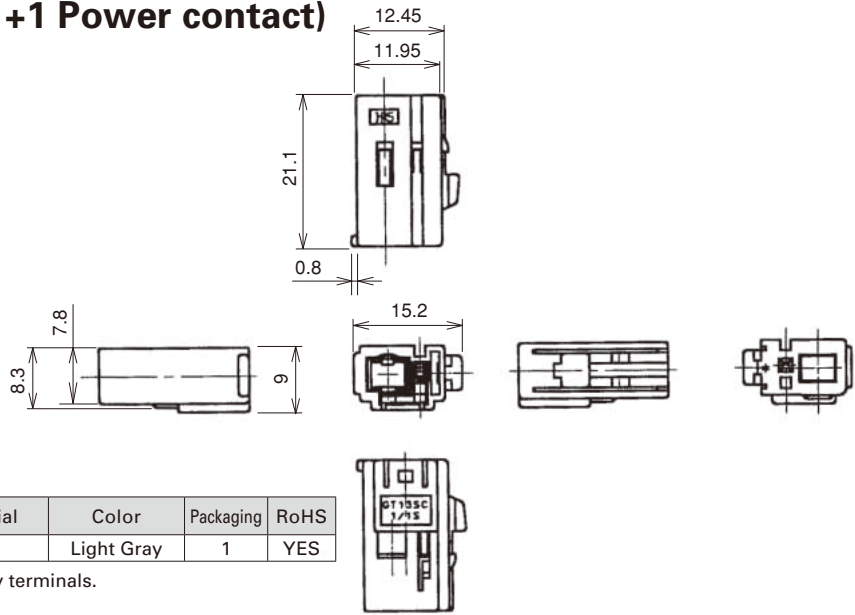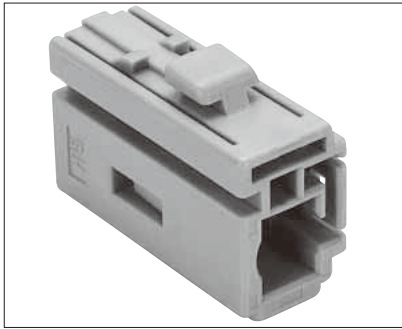

Part No.	HRS No.	Material	Color	Packaging	RoHS
GT13SC-1/1S-HU	763-0010-4 00	PBT	Light Gray	1	YES


Note : GT10A-2022SCF is used for power supply terminals.

● Retainer (Used with GT13SC-1/1S-HU, GT13SS-1/1S-HU)

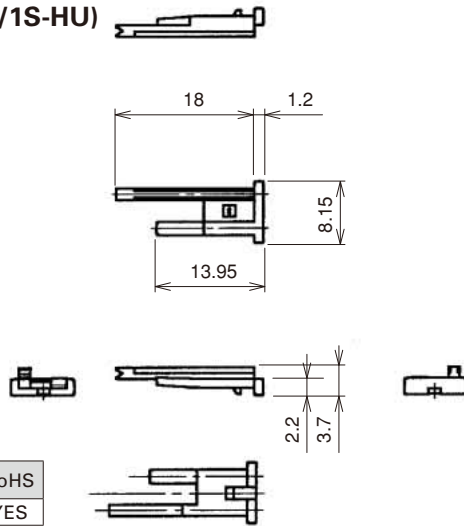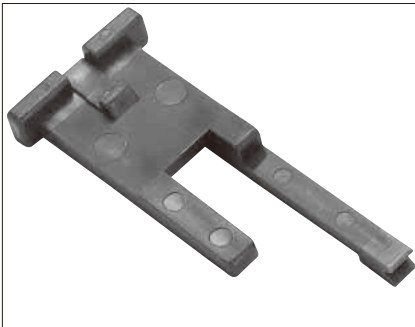

Part No.	HRS No.	Material	Color	Packaging	RoHS
GT13SC-1/1S-R	763-0011-7 00	PBT	Dark Gray	1	YES

■ F Housing (1 Coaxial + 1 Power contact)

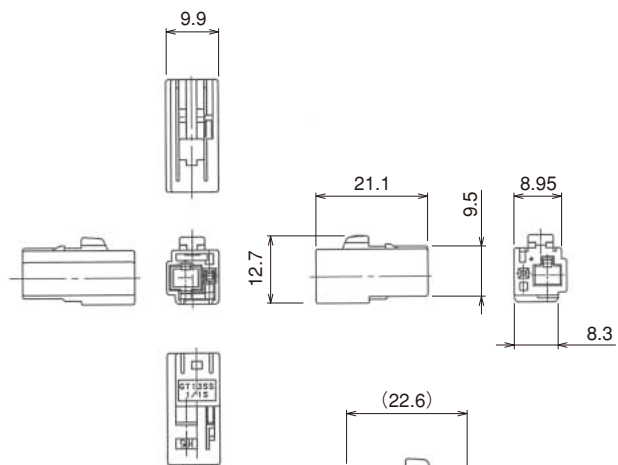


Part No.	HRS No.	Material	Color	Packaging	RoHS
GT13SS-1/1S-HU	763-0093-1 00	PBT	Light Gray	1	YES

Note : GT10A-2022SCF is used for power supply terminals.

◆ Retainer assembled


GT13SC-1/1S-R

F Housing (2 coaxials)

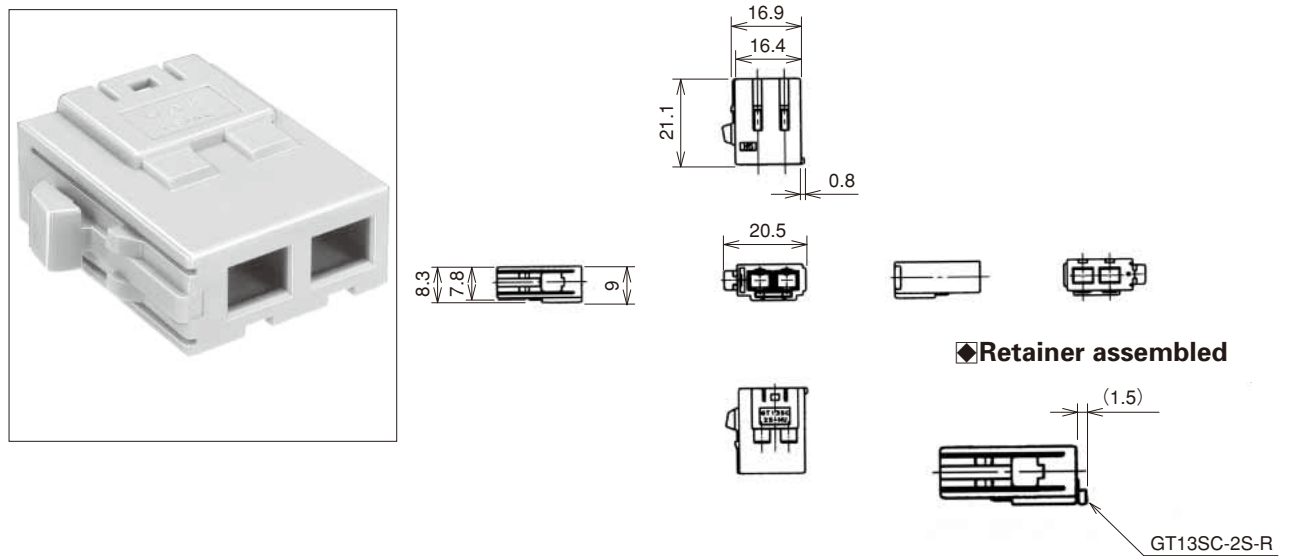


Part No.	HRS No.	Material	Color	Key polarizing code	Packaging	RoHS
GT13SC-2S-HU	763-0014-5 00	PBT	Light Gray	Standard	1	YES

● Retainer (Used with GT13SC-2S-HU,GT13SCN-2PP-HU and GT13SCH-2PP-HU)

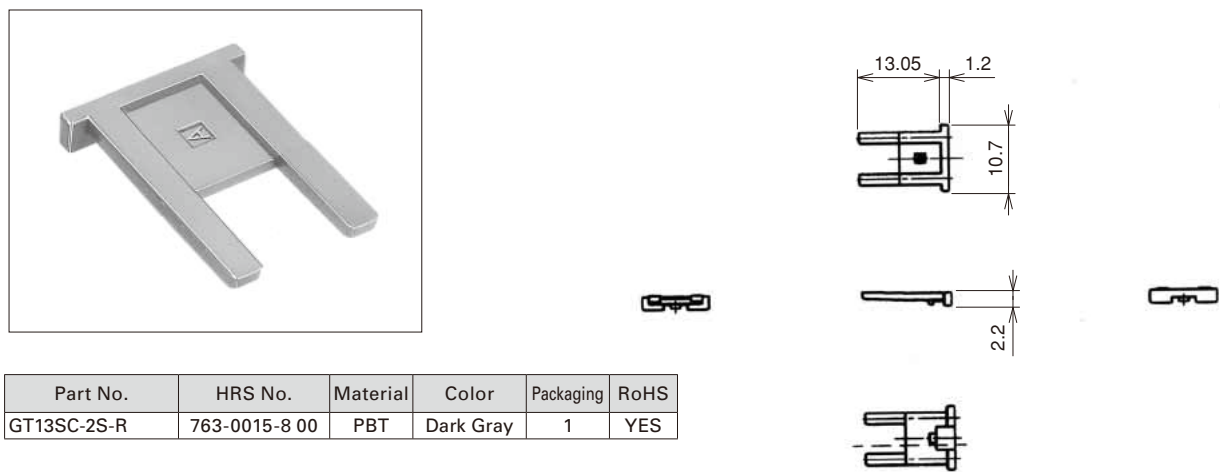

Part No.	HRS No.	Material	Color	Packaging	RoHS
GT13SC-2S-R	763-0015-8 00	PBT	Dark Gray	1	YES

F Housing (2 Coaxials + 1 Power contact)

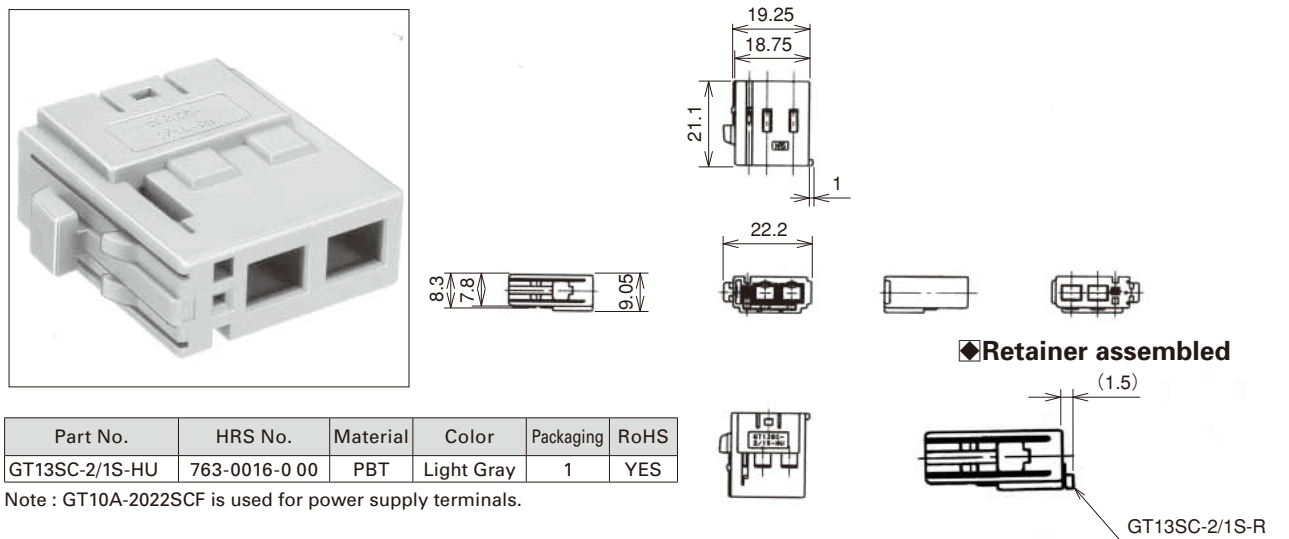

Part No.	HRS No.	Material	Color	Packaging	RoHS
GT13SC-2/1S-HU	763-0016-0 00	PBT	Light Gray	1	YES

Note : GT10A-2022SCF is used for power supply terminals.

GT5

GT13

GT16

PO5G

GT19

GT21

GT26

GT36

GT11

GT17

GT32

GT3

GT7

GT10

GT18W



GT25

GT8E

GT9



GT15

● Retainer (Only for GT13SC-2/1S-HU)

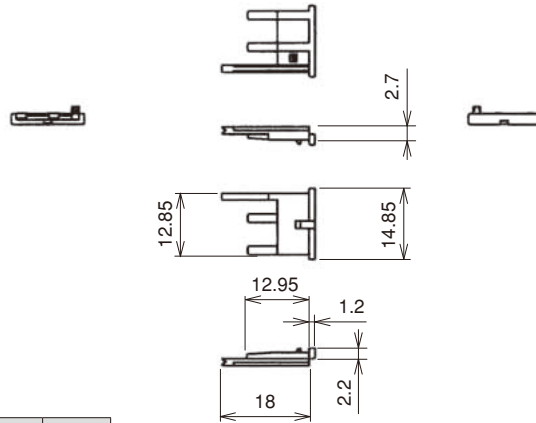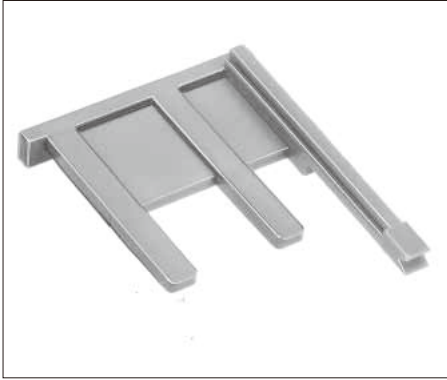

Part No.	HRS No.	Material	Color	Packaging	RoHS
GT13SC-2/1S-R	763-0017-3 00	PBT	Dark Gray	1	YES

■ F Housing (4 Coaxials + 1 Power contact)

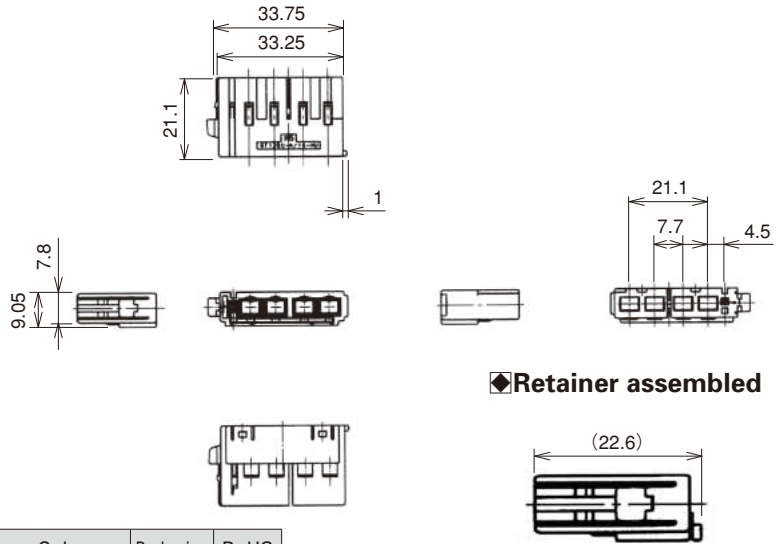
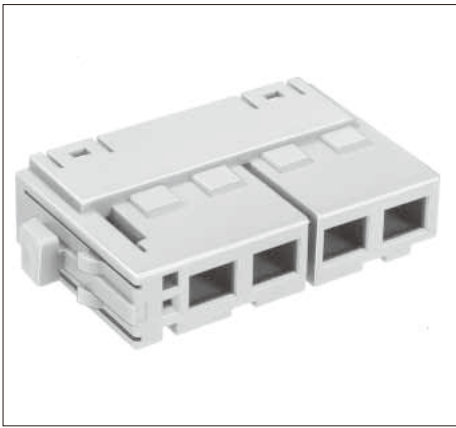


◆Retainer assembled

Part No.	HRS No.	Material	Color	Packaging	RoHS
GT13SC-4/1S-HU	763-0021-0 00	PBT	Light Gray	1	YES
GT13SC-4/1S-HU(A)	763-0022-3 00		Brown		


Note : GT10A-2022SCF is used for power supply terminals.

● Retainer (Only for GT13SC-4/1S-R)

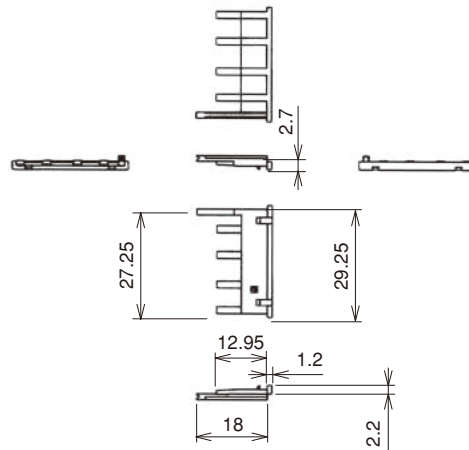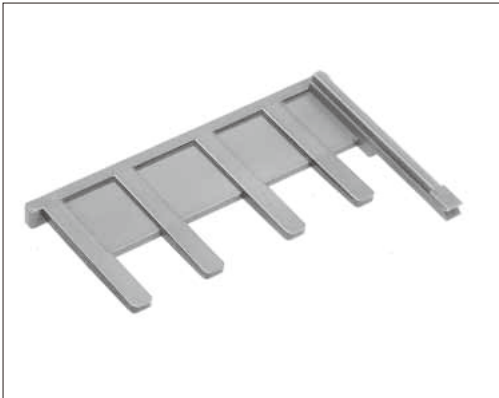

Part No.	HRS No.	Material	Color	Packaging	RoHS
GT13SC-4/1S-R	763-0023-6 00	PBT	Dark Gray	1	YES


■ M Housing (1 Coaxial + 1 Power contact)

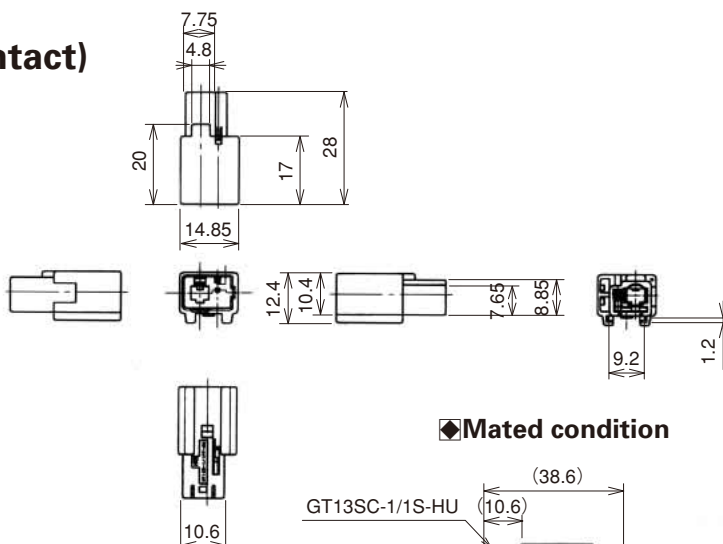

Part No.	HRS No.	Material	Color	Packaging	RoHS
GT13SCN-1/1PP-HU	763-0036-8 00	PBT	Light Gray	1	YES


Note : GT10SC-2022PCF or GT10A-2022PCF is used for power supply terminals.

● Retainer

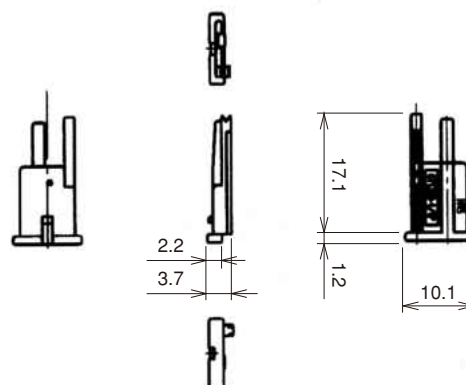

Part No.	HRS No.	Material	Color	Packaging	RoHS
GT13SC-1/1P-R	763-0039-6 00	PBT	Dark Gray	1	YES



■ M Housing (1 Coaxial + 1 Power contact)

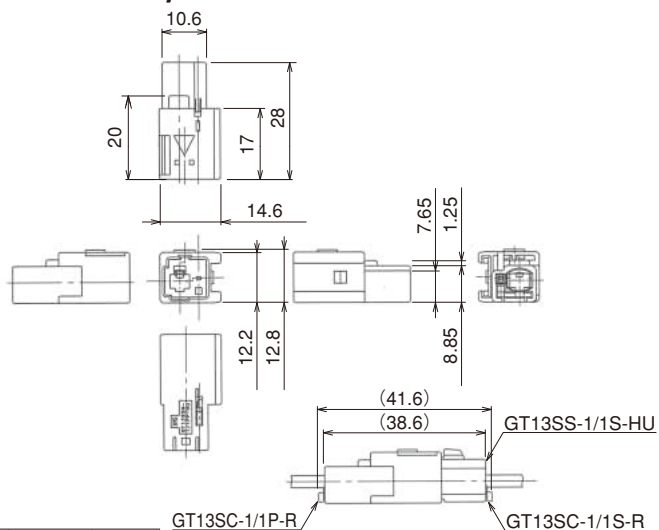

Part No.	HRS No.	Material	Color	Packaging	RoHS
GT13SSN-1/1PP-HU	763-0092-9 00	PBT	Light Gray	1	YES


Note : GT10SC-2022PCF or GT10A-2022PCF is used for power supply terminals.

M Housing (2 coaxials)

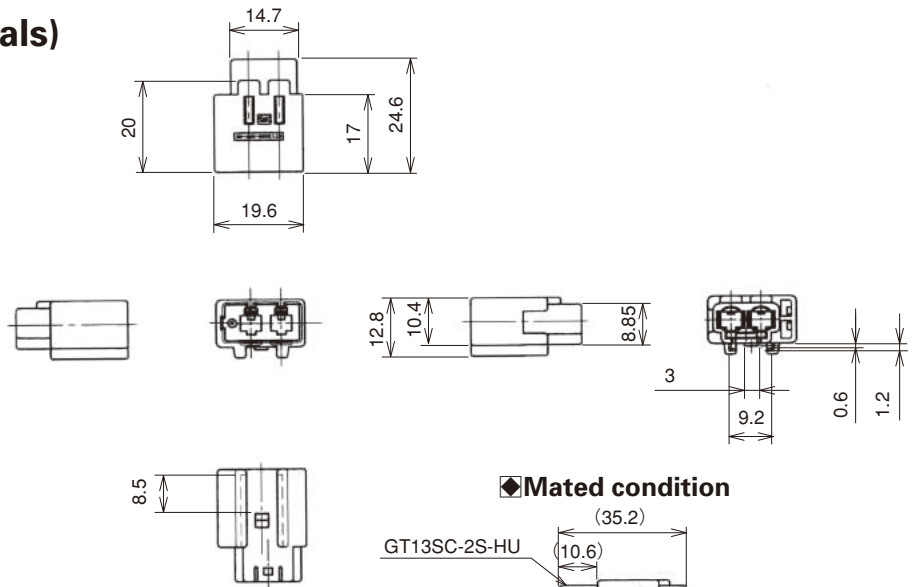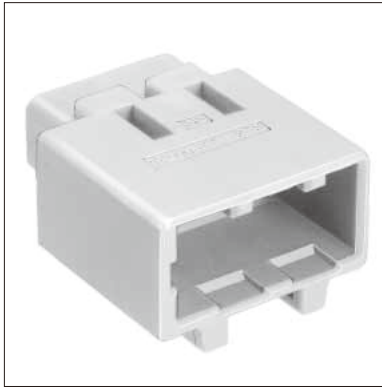


Part No.	HRS No.	Material	Color	Packaging	RoHS
GT13SCN-2PP-HU	763-0046-1 00	PBT	Light Gray	1	YES

M Housing (2 coaxials)

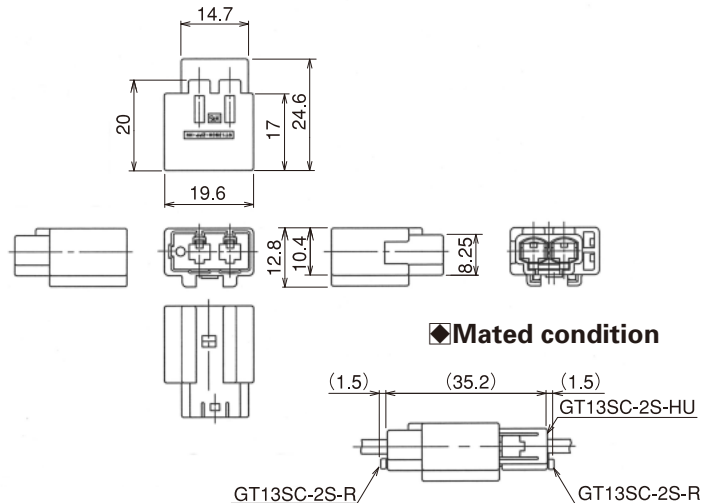

Part No.	HRS No.	Material	Color	Packaging	RoHS
GT13SCH-2PP-HU	763-0072-1 00	PBT	Light Gray	1	YES



M Housing (2 Coaxials + 1 Power contact)

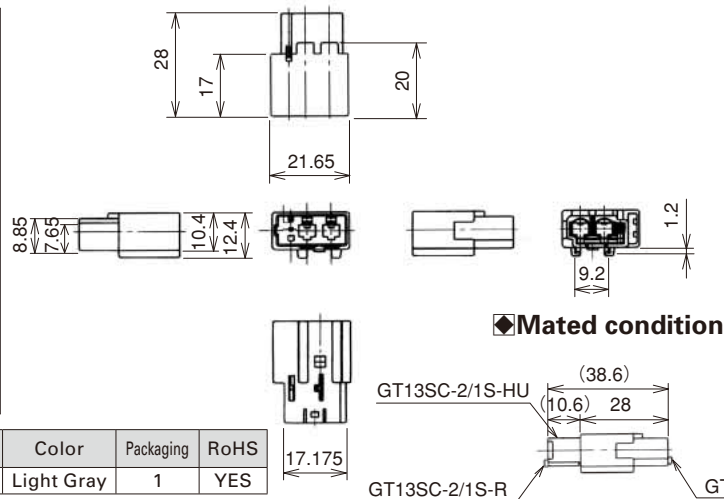

Part No.	HRS No.	Material	Color	Packaging	RoHS
GT13SCN-2/1PP-HU	763-0038-3 00	PBT	Light Gray	1	YES


Note : GT10SC-2022PCF or GT10A-2022PCF is used for power supply terminals.

● Retainer (Only for GT13SCN-2/1PP-HU)

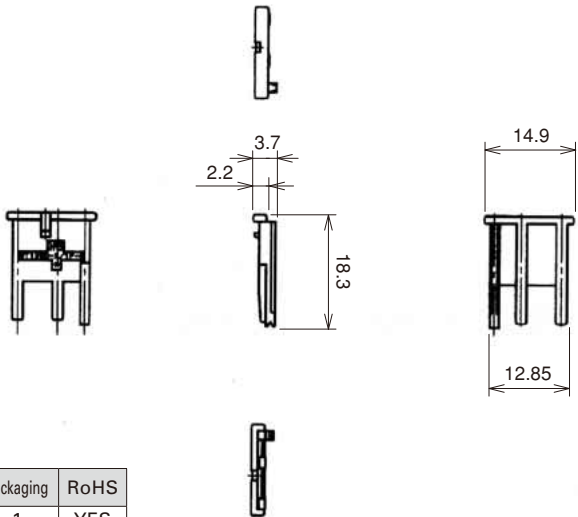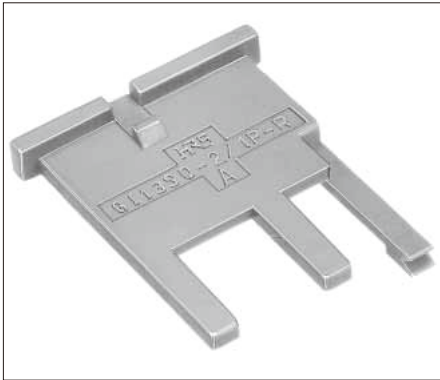

Part No.	HRS No.	Material	Color	Packaging	RoHS
GT13SC-2/1PP-R	763-0040-5 00	PBT	Dark Gray	1	YES


■ M Housing (4 Coaxials + 1 Power contact)

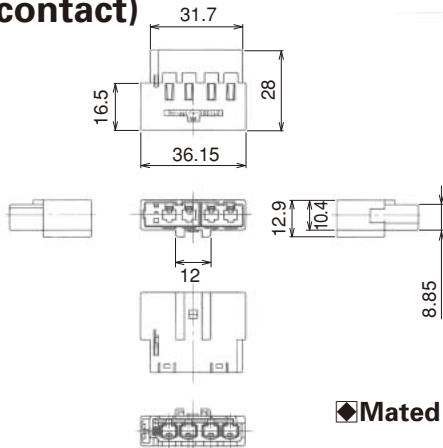



Part No.	HRS No.	Material	Color	Packaging	RoHS
GT13SCH-4/1PP-HU	763-0060-2 00	PBT	Light Gray	1	YES

Note : GT10SC-2022PCF or GT10A-2022PCF is used for power supply terminals.

◆ Mated condition





● Retainer

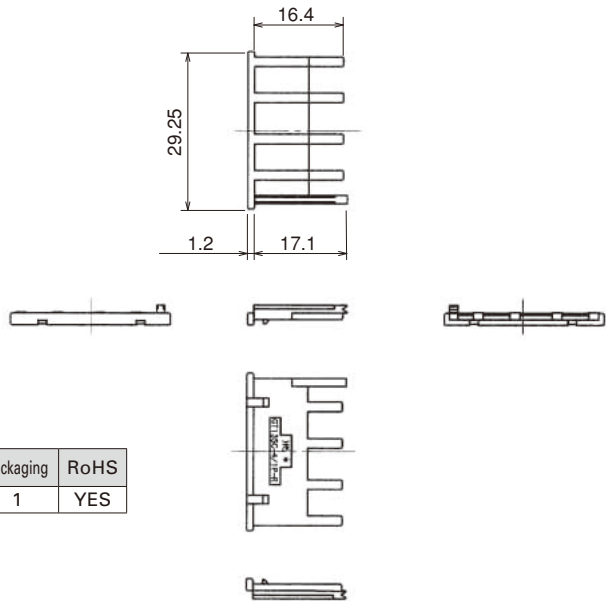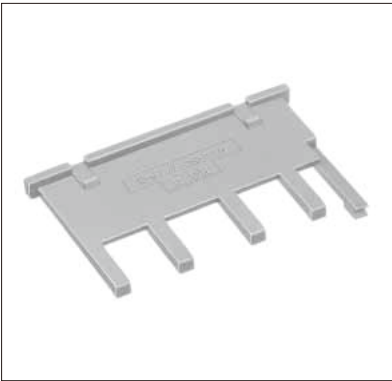


Part No.	HRS No.	Material	Color	Packaging	RoHS
GT13SC-4/1P-R	763-0061-5 00	PBT	Dark Gray	1	YES

Printed Circuit Board Type (1 Coaxial +1 Power contact)

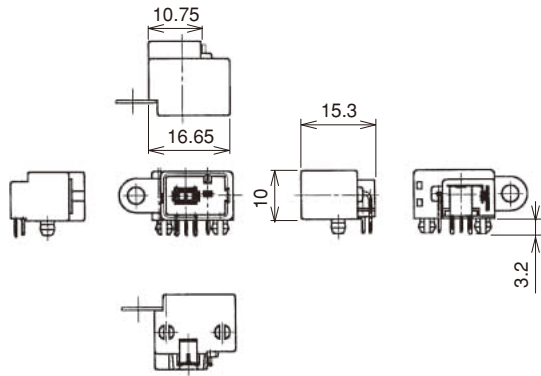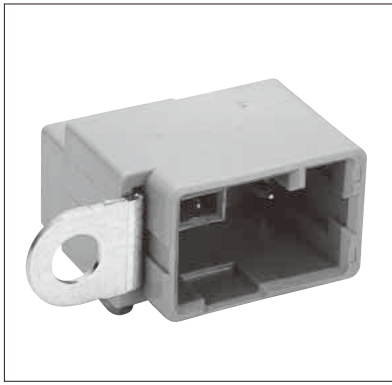


◆ Mated condition

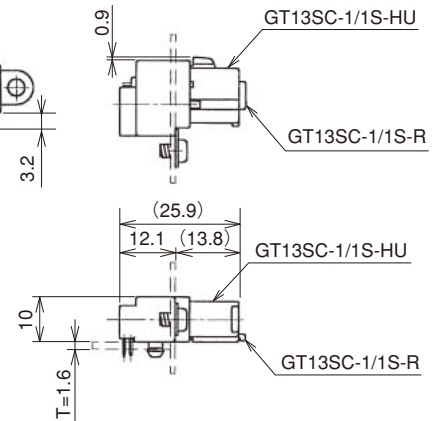


Part No.	HRS No.	Material/Plating or Color	Packaging	RoHS
GT13SC-1/1PP-DS(70)	763-0009-5 70	Housing: PBT/Light Gray Center terminal: Copper alloy/Tin plating Outer terminal: Copper alloy/Tin plating Power terminal: Copper alloy/Tin plating Metal bracket: Copper alloy/Tin plating	1	YES



◆ Recommended PCB pattern

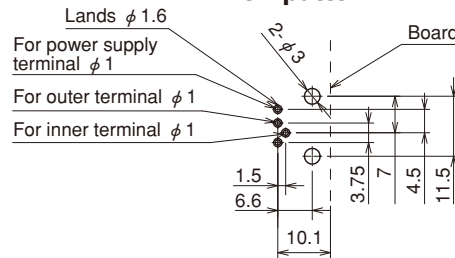


◆ Recommended panel cutout dimension



Printed Circuit Board Type (2 Coaxials)

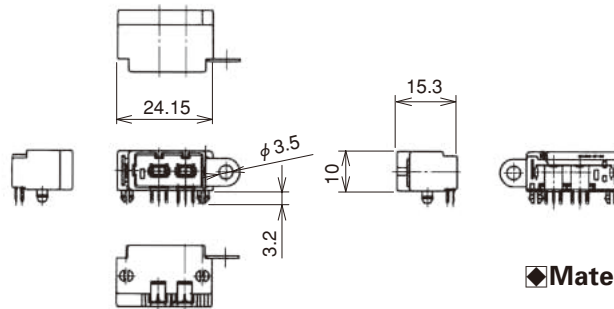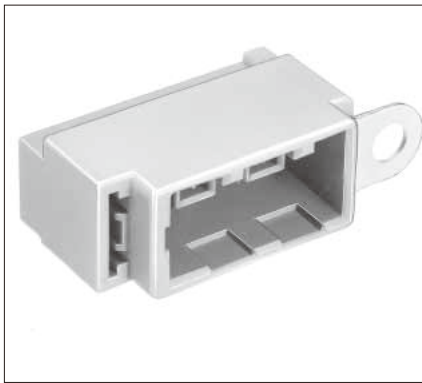


◆ Mated condition

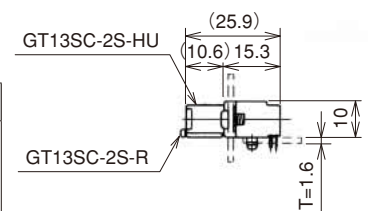





Part No.	HRS No.	Material	Color	Key polarizing code	Packaging	RoHS
GT13SC-2PP-DS	763-0013-2	Housing: PBT Center terminal: Copper alloy/Tin plating Outer terminal: Copper alloy/Tin plating Metal bracket: Copper alloy/Tin plating	Light Gray	Standard	1	YES

◆ Recommended PCB pattern

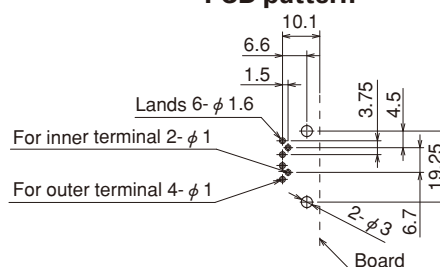


◆ Recommended panel cutout dimension









[illegible]


Part No.	HRS No.	Material / Plating or Color	Packaging	RoHS
GT13SC-2/1PP-DS(70)	763-0018-6 70	Housing : PBT / Light Gray Center terminal : Copper alloy / Tin plating Outer terminal : Copper alloy / Tin plating Power terminal : Copper alloy / Tin plating Metal bracket : Copper alloy / Tin plating	1	YES

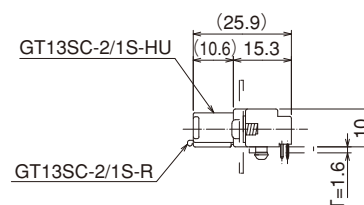



A grey plastic RJ45 network port, commonly used for connecting Ethernet cables. It features a rectangular body with a circular latch on the right side for easy insertion and removal of the cable. The port has two internal slots for the cable's conductors.



Part No.	HRS No.	Material	Color	Key polarizing code	Packaging	RoHS
GT13SC-4/1PP-DS(70)	763-0019-9 70	Housing : PBT Center terminal : Copper alloy / Tin plating Outer terminal : Copper alloy / Tin plating	Light Gray	Standard	1	YES
GT13SC-4/1PP-DS(A)(70)	763-0020-8 70	Power terminal : Copper alloy / Tin plating Metal bracket : Copper alloy / Tin plating	Brown	(A)		

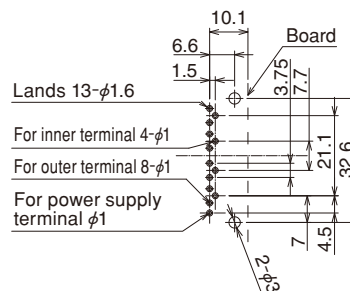


◆ Recommended panel cutout dimension

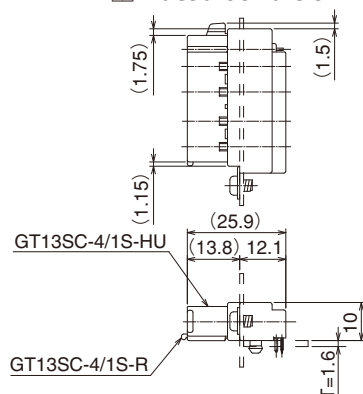

GT13SH Series

Power Supply Terminals

■ F Connector Terminals

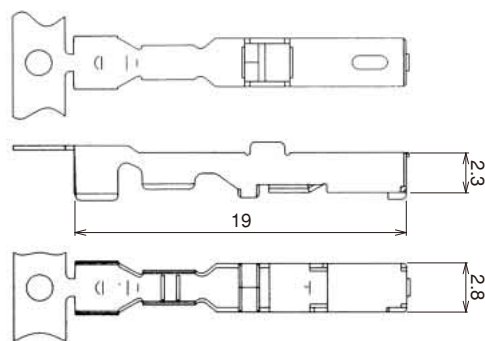


Part No.	HRS No.	Material	Plating	Conductor Size (AWG)	Outer Diameter	Packaging	RoHS
GT7-2022SCF(70)	757-0001-1 70	Copper alloy	Tin plating	20 to 22 AWG	φ1.4 to 2.4	5,000 pcs/reel	YES
GT7A-2022SCF(70)	757-0003-7 70				φ2.6 to 3.1	3,000 pcs/reel	

Note1 : Sold by the reel.(See above table for number of Packaging.)

Note2 : This component is used only with applicable HRS housings.

■ Terminals for M Connector

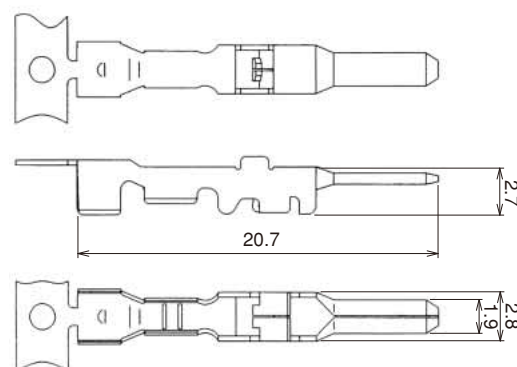


Part No.	HRS No.	Material	Plating	Conductor Size (AWG)	Outer Diameter	Packaging	RoHS
GT7-2022PCF(70)	757-0002-4 70	Brass	Tin plating	20 to 22 AWG	φ1.4 to 2.4	5,000 pcs/reel	YES
GT7A-2022PCF(70)	757-0004-0 70				φ2.6 to 3.1	3,000 pcs/reel	

Note1 : Sold by the reel.(See above table for number of Packaging.)

Note2 : This component is used only with applicable HRS housings.

■ F Housing (1 Coaxial + 1 Power contact)



Part No.	HRS No.	Material	Color	Packaging	RoHS
GT13SH-1/1S-HU	763-0048-7 00	PBT	Light Gray	1	YES
GT13SH-1/1S-HU(A)	763-0059-3 00		Brown		


Note : GT7-2022SCF(70) or GT7A-2022SCF(70) is used for power supply terminals.



● Retainer



Part No.	HRS No.	Material	Color	Packaging	RoHS
GT13SH-1/1S-R	763-0049-0 00	PBT	Dark Gray	1	YES

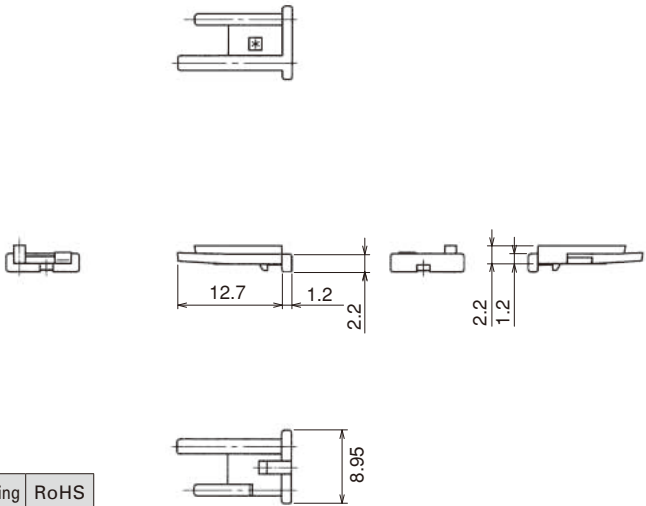


■ F Housing (2 Coaxials + 1 Power contact)




Part No.	HRS No.	Material	Color	Packaging	RoHS
GT13SH-2/1S-HU	763-0065-6 00	PBT	Light Gray	1	YES


Note : GT7-2022SCF(70) or GT7A-2022SCF(70) is used for power supply terminals.

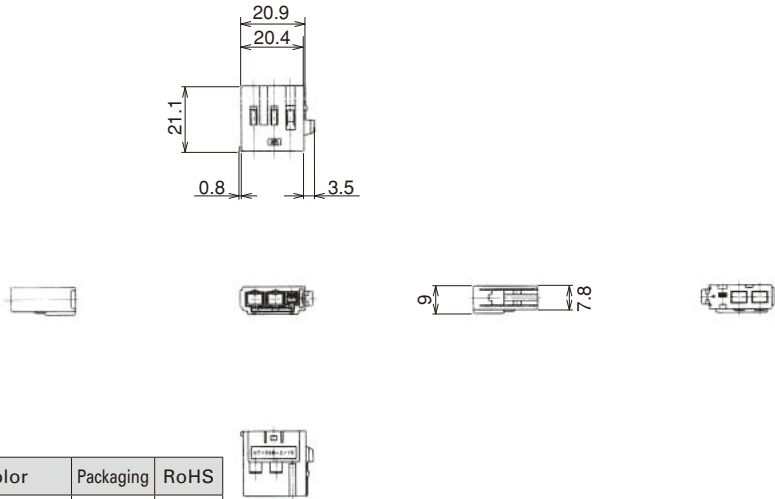


● Retainer

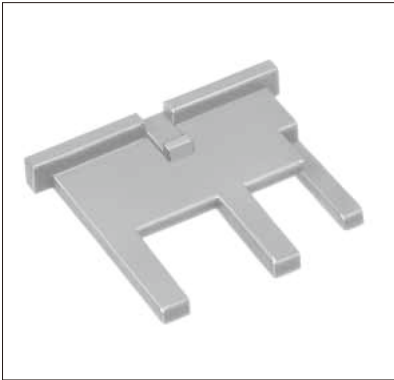

Part No.	HRS No.	Material	Color	Packaging	RoHS
GT13SH-2/1S-R	763-0064-3 00	PBT	Dark Gray	1	YES

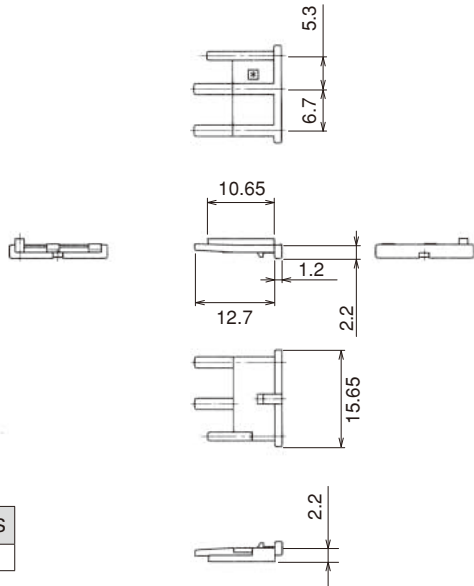


■ M Housing (1 Coaxial + 1 Power contact)

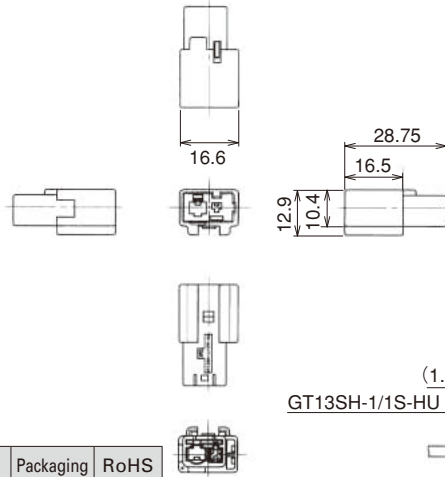


Part No.	HRS No.	Material	Color	Packaging	RoHS
GT13SH-1/1PP-HU	763-0055-2 00	PBT	Light Gray	1	YES

Note : Power supply terminal is GT7-2022PCF(70) or GT7A-2022PCF(70).

◆ Mated condition

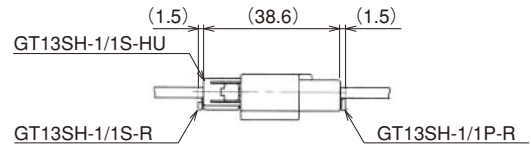


■ M Housing (1 Coaxial + 1 Power contact)

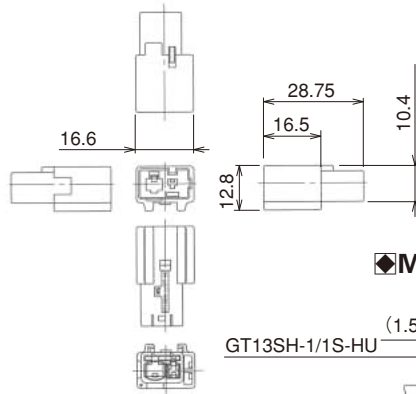

Part No.	HRS No.	Material	Color	Packaging	RoHS
GT13SHN-1/1PP-HU	763-0078-8 00	PBT	Light Gray	1	YES

Note : Power supply terminal is GT7-2022PCF(70) or GT7A-2022PCF(70).


◆ Mated condition

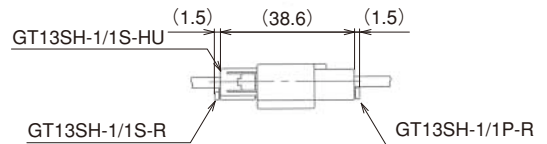


● Retainer



Part No.	HRS No.	Material	Color	Packaging	RoHS
GT13SH-1/1P-R	763-0056-5 00	PBT	Dark Gray	1	YES

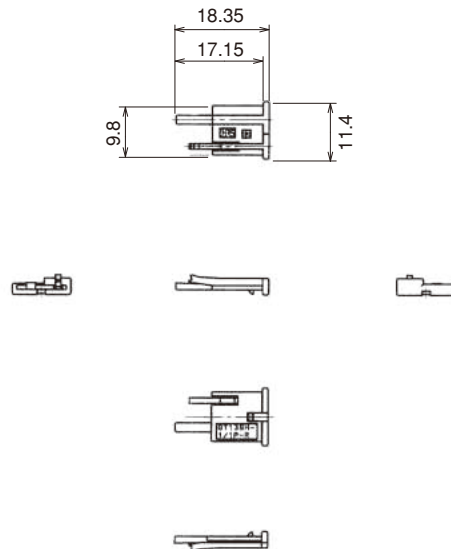


M Housing (2 Coaxials + 1 Power contact)

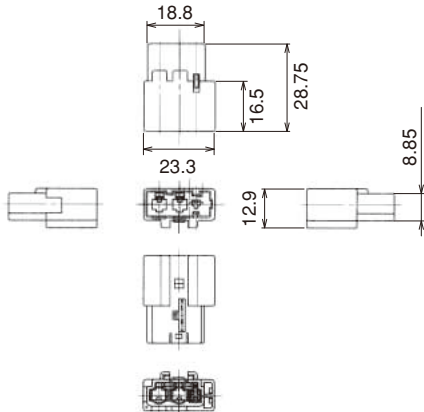


Part No.	HRS No.	Material	Color	Packaging	RoHS
GT13SH-2/1PP-HU	763-0076-2 00	PBT	Light Gray	1	YES

Note : GT7-2022SCF(70) or GT7A-2022SCF(70) is used for power supply terminals.

Mated condition





Retainer

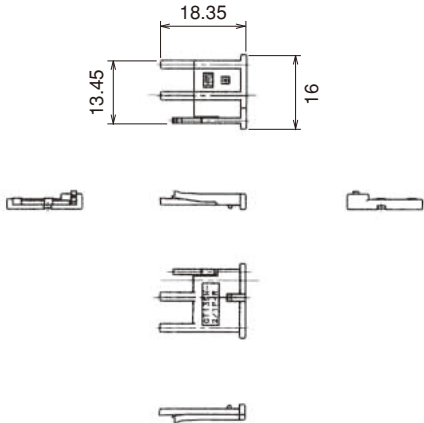


Part No.	HRS No.	Material	Color	Packaging	RoHS
GT13SH-2/1P-R	763-0077-5 00	PBT	Dark Gray	1	YES


Printed Circuit Board Type (1 Coaxial)

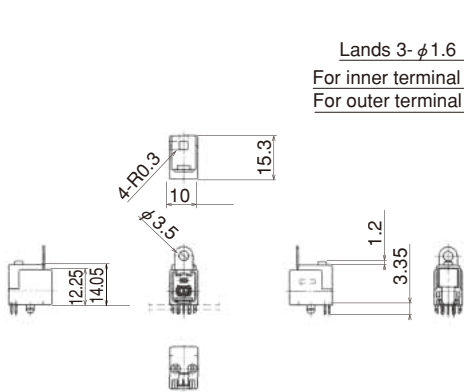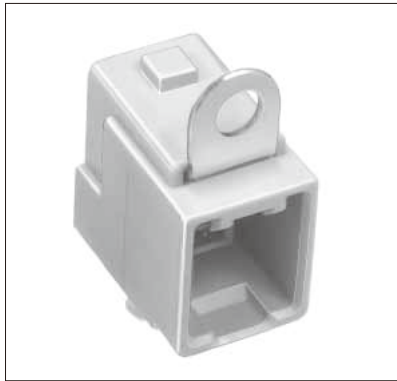


Recommended PCB pattern



Recommended panel cutout dimension





Mated condition




Part No.	HRS No.	Material / Plating or Color	Packaging	RoHS
GT13SHA-1PP-DS	763-0062-8 00	Housing : PBT / Light Gray Center terminal : Copper alloy / Tin plating Outer terminal : Copper alloy / Tin plating Metal bracket : Copper alloy / Tin plating	1	YES

Printed Circuit Board Type (2 Coaxials + 1 Power contact)

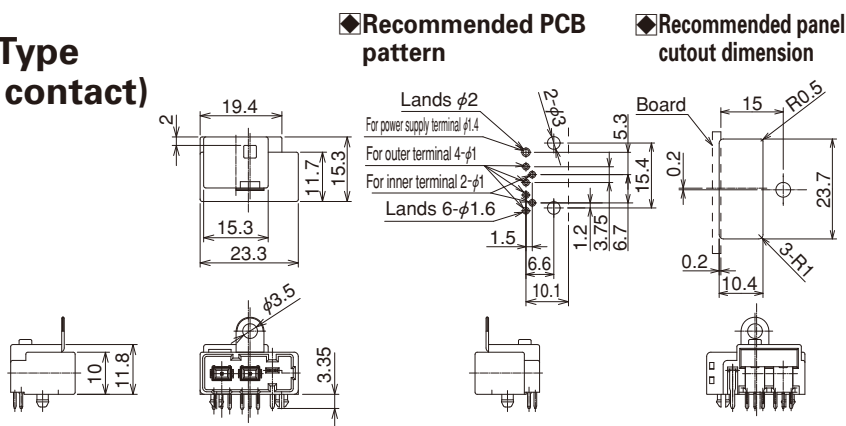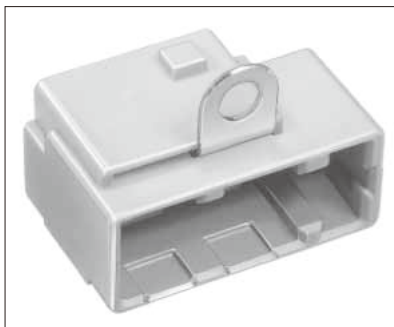


Part No.	HRS No.	Material / Plating or Color	Packaging	RoHS
GT13SHA-2/1PP-DS	763-0063-0	Housing: PBT / Light Gray Center terminal: Copper alloy / Tin plating Outer terminal: Copper alloy / Tin plating Power terminal: Copper alloy / Tin plating Metal bracket: Copper alloy / Tin plating	1	YES

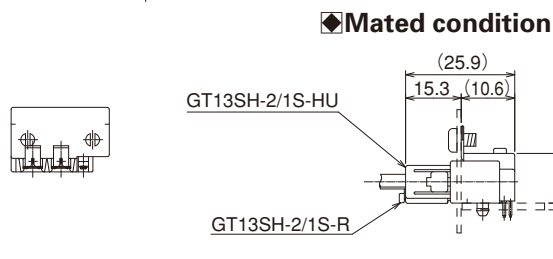

◆ Crimping tools

User's manuals are available. Please contact a Hirose Electric account representative.

Automatic Crimping Machine

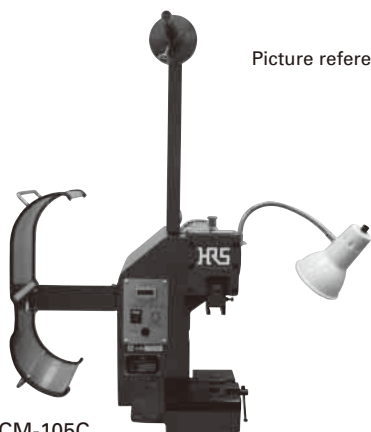

Picture reference only

Part No. CM-105C

Specifications

Item	Specification	Remarks
Press capacity	1.5tons	
Stroke Length	30mm	
Number of strokes	200spm (50Hz)	200spm (60Hz)
Weight	75kg	
Motor	0.2kW	AC 100V
Crimping speed	2000 to 4000pcs/h	

* Crimp height setting tables are available for each cable type. Please contact your nearest Hirose Electric account representative.
Different cables will require different crimp height settings.

● Special reel stand is required.

● Harness tools

Terminal Product No.	Terminal HRS No.	Tool No.	Tool HRS No.
GT13-2428/1.6-2.9SCF(70)	763-0001-3 70	AP105-GT13-2428/1.6-2.9S	901-5073-1
GT13-2428/1.6-2.9PCF(70)	763-0002-6 70	AP105-GT13-2428/1.6-2.9P	901-5074-7
GT13-30/1.6-2.9SCF(70)	763-0012-0 70	AP105-GT13-30/1.6-2.9S-ID	901-5099-5
GT13-30/1.6-2.9PCF(70)	763-0041-8 70	AP105-GT13-30/1.6-2.9P-ID	901-5118-8
GT13-30/1.6-2.9SCF(70)	763-0012-0 70	AP105-GT13-30/1.6-2.9S	901-5116-2
GT13-30/1.6-2.9PCF(70)	763-0041-8 70	AP105-GT13-30/1.6-2.9P	901-5119-0

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Hirose Electric:

[GT13-1/1/1/1P-DS](#) [GT13-1/1/1/1P-DS\(70\)](#) [GT13-1/1/1P-DS\(70\)](#) [GT13-1P-DS\(70\)](#) [GT13-1PP-HU](#) [GT13-1PP-HU\(10\)](#)
[GT13-1S-HU](#) [GT13-2428/F3.3-3.8PCF\(70\)](#) [GT13SC-1/1PP-DS\(70\)](#) [GT13-2022/F4-5PCF\(70\)](#) [GT13-2022/F4-5SCF\(70\)](#) [GT13-2428/1.6-2.5PCF\(70\)](#) [GT13-2428/1.6-2.5SCF\(70\)](#) [GT13-2428/1.6-2.9PCF](#) [GT13-2428/1.6-2.9PCF\(70\)](#) [GT13-2428/1.6-2.9SCF](#) [GT13-2428/1.6-2.9SCF\(70\)](#) [GT13-2428/F4-5PCF](#) [GT13-30/1.6-2.9PCF\(70\)](#) [GT13-30/1.6-2.9SCF](#) [GT13-30/1.6-2.9SCF\(70\)](#) [GT13-30/F3.3-3.8PCF\(70\)](#) [GT13-30/F3.3-3.8SCF\(70\)](#) [GT13-2428/F4-5PCF\(70\)](#) [GT13-2428/F4-5SCF\(70\)](#) [GT13-30/F4-5PCF\(70\)](#) [GT13-30/F4-5SCF\(70\)](#) [GT13/5-2/1S-HU](#) [GT13/5N-2/1PP-HU](#) [GT13-1P-DS\(71\)](#) [GT13-2022/F3.3-5SCF](#) [GT13RM-1S-HU](#) [GT13S-1/1/1/1PP-DS](#) [GT13S-1/1/1/1PP-DS\(10\)](#) [GT13SA-1/1PP-DS\(10\)](#) [GT13SH-1/1RS-R](#) [GT13S-1S-HU](#) [GT13SHA-1PP-DS](#) [GT13SC-2S-HU](#) [GT13SC-2/1S-HU](#) [GT13SCH-2PP-HU](#) [GT13SCH-4/1PP-HU](#) [GT13SCN-2/1PP-HU](#) [GT13/5-2/1S-R](#) [GT13SHA-1/1PP-DS](#) [GT13S-1PP-HU\(B\)](#) [GT13SC-4/1S-HU\(A\)](#) [GT13SH-2/1P-R](#) [GT13SSN-1/1PP-HU](#) [GT13SH-1/1PP-DS\(A\)](#) [GT13GM-1/1PP-HU\(22\)](#) [GT13S-1PP-DS](#) [GT13SC-4/1PP-DS\(A\)\(70\)](#) [GT13SCN-2PP-HU](#) [GT13SH-1/1S-HU](#) [GT13SC-2PP-DS\(30\)](#) [GT13G-1/1S-R](#) [GT13SHA-1PP-DS\(10\)](#) [GT13SC-1/1PP-DS\(71\)](#) [GT13GM-2022/4.5-6.2SCF](#) [GT13S-1PP-HU\(A\)](#) [GT13SC-2/1PP-R](#) [GT13S-1S-HU\(A\)](#) [GT13SS-1/1S-HU\(21\)](#) [GT13SH-1/1P-R](#) [GT13S-1PP-DS\(B\)](#) [GT13SHA-2/1PP-DS\(10\)](#) [GT13GM-1/1P-R](#) [GT13SS-1/1S-HU](#) [GT13SC-4/1PP-DS\(71\)](#) [GT13S-1PP-HU\(10\)](#) [GT13SC-1/1S-HU](#) [GT13SC-4/1P-R](#) [GT13SH-2/1PP-HU](#) [GT13SC-2/1S-R](#) [GT13SC-2/1PP-DS\(70\)](#) [GT13S-1PP-DS\(10\)](#) [GT13SC-4/1PP-DS\(70\)](#) [GT13SCN-1/1PP-HU](#) [GT13SC-1/1S-R](#) [GT13SH-1/1PP-HU](#) [GT13SHA-1PP-DS\(35\)](#) [GT13S-1PP-DS\(A\)\(10\)](#) [GT13L-30/1.1-2.2SCF](#) [GT13G-1/1S-HU\(22\)](#) [GT13G-1/1S-HU](#) [GT13S-1PP-DS\(11\)](#) [GT13SC-2S-HU\(21\)](#) [GT13S-1P/S-R](#) [GT13SC-4/1S-HU](#) [GT13SC-2PP-DS](#) [GT13GM-2022/4.5-6.2PCF](#) [GT13-2022/F3.3-5PCF](#) [GT13SH-1/1PP-DS](#) [GT13SH-2/1S-HU](#) [GT13SHA-1/1PP-DS\(A\)](#) [GT13GM-1/1S-R](#) [GT13GM-1/1S-HU](#) [GT13S-1PP-DS\(A\)](#) [GT13L-2428/1.1-2.2SCF](#)



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.