



## SSRM series

### 45-65A DIN Mount Solid State Relay With Paired SCR Output, Integral Heatsink

**us** File E29244

Users should thoroughly review the technical data before selecting a product part number. It is recommended that users also seek out the pertinent approvals files of the agencies/laboratories and review them to confirm the product meets the requirements for a given application.

#### Features

- DIN mount design with integral heatsink.
- Choice of 45, 55 or 65A rms inverse-parallel connected SCR output.
- 48 - 660VAC output.
- 4 -32VDC or 90 - 140Vrms input control.
- 4,000V rms optical isolation.
- Green LED input status indicator.
- Finger-safe (IP20) screw clamp terminals for load and control.
- Ground terminal.

#### Engineering Data

**Form:** 1 Form A (SPST-NO).

**Duty:** Continuous.

**Isolation:** 4,000V rms input-to-output-to-ground.

**Insulation Resistance:** 10<sup>9</sup> Ohms, minimum, at 500VDC.

**Capacitance:** 8.0 pf maximum (input to output).

**Temperature Range:**

**Storage:** -40°C to +125°C

**Operating:** -40°C to + 80°C

**Case and Mounting:** Refer to outline dimension drawing.

**Termination:**

**Control:** Finger safe (IP20) screw clamps accepting wire size up to #12 AWG (2.5 mm).

**Load:** Finger safe (IP20) screw clamps accepting wire size up to #8 AWG (3.8 mm).

**Ground:** #10 screw with 5/16 in. hex/slotted head.

**Installation Spacing:** Minimum 0.8 in (20 mm) space between units.

**Approximate Weight:** 16.9 oz. (479 g).

#### Ordering Information

Sample Part Number ▶

**SSRM**

**-600**

**A**

**55**

**1. Basic Series:** SSRM = Solid State Relay with Integral Heatsink for DIN Rail Mounting

**2. Line Voltage:** 600 = 48 - 660 VAC

**3. Input Type & Voltage:** A = 90 - 140VAC  
D = 4 - 32VDC

**4. Maximum Switching Rating/Output:** 45 = 45.0A rms  
55 = 55.0A rms  
65 = 65.0A rms

**Our authorized distributors are more likely to maintain the following items in stock for immediate delivery.**

SSRM-600A45  
SSRM-600D45

SSRM-600A55  
SSRM-600D55

SSRM-600A65  
SSRM-600D65

#### Input Specifications


Parameter	Conditions	AC Control Units	DC Control Units
Control Voltage Range V <sub>IN</sub>	@ 25°C	90 - 140 Vrms	4.0 - 32 VDC
Reverse Voltage V <sub>IN</sub> (Max.)	@ 25°C	—	32 VDC
Must Operate Voltage V <sub>IN(OPS)</sub> (Min.)	@ 25°C	90 Vrms	4.0 VDC
Must Release Voltage V <sub>IN(REL)</sub> (Min.)	@ 25°C	10 Vrms	1.0 VDC
Input Current (Typ.)	@ 25°C	15 mA @ 120 Vrms	14 mA @ 5 VDC
Input Current (Max.)	@ 25°C	—	30 mA

**Output Specifications (@ 25° C, unless otherwise specified)**

Parameter	Conditions	Units	45A Rated Units	55A Rated Units	65A Rated Units
Load Voltage Range $V_L$	$f = 47 - 63 \text{ Hz.}$	V rms	48 - 660	48 - 660	48 - 660
Repetitive Blocking Voltage (Min.)		V peak	$\pm 1200$	$\pm 1200$	$\pm 1200$
Load Current Range $I_L^*$		A rms	0.15 - 45.0	0.25 - 55.0	0.25 - 65.0
Single Cycle Surge Current (Min.)		A peak	625	1,000	1,200
Leakage Current (Off-State) (Max.)	$f = 60 \text{ Hz. } V_L = 600\text{Vrms}$	mA rms	1.0	1.0	1.0
Thermal Resistance Junction to Case $R_{\theta J-C}$ (Max.)		°C/W	0.63	0.31	0.28
On-State Voltage Drop (Max.)	$I_L = \text{Max.}$	V peak	1.7	1.7	1.7
Static dv/dt (Off-State) (Min.)	$V_L = \text{Max.}$	V/ $\mu\text{s}$	500	500	500
Turn-On Time (Max.)	$f = 60 \text{ Hz.}$	ms	8.3 for DC Input Models, 10.0 for AC Input Models		
Turn-Off Time (Max.)	$f = 60 \text{ Hz.}$	ms	8.3 for DC Input Models, 40.0 for AC Input Models		
$I^2 t$ Rating (Max.)	$t = 8.3 \text{ ms}$	A <sup>2</sup> Sec.	1,620	4,150	6,000
Load Power Factor Rating (Min.)	$I_L = \text{Max.}$		0.5	0.5	0.5

\*See Thermal Derating Curves.

**Electrical Characteristics (Thermal Derating Curves)**

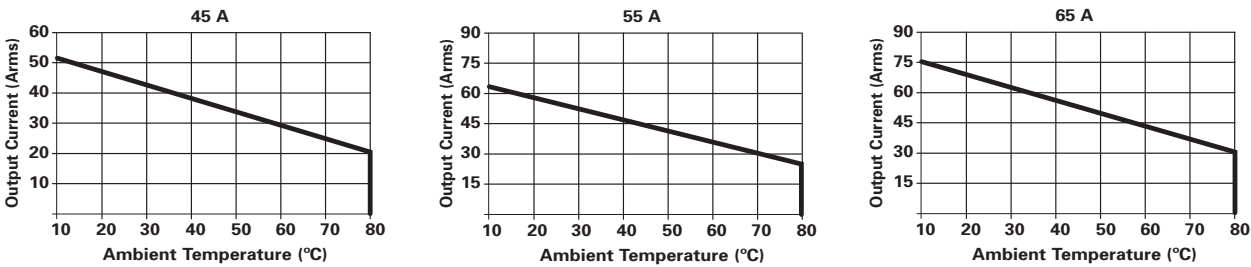


**Disclaimer**

While Tyco Electronics has made every reasonable effort to ensure the accuracy of the information in this document, Tyco Electronics does not guarantee that it is error-free, nor does Tyco Electronics make any other representation, warranty or guarantee that the information is accurate, correct, reliable or current.

Tyco Electronics reserves the right to make any adjustments to the information contained herein at any time without notice. Tyco Electronics expressly disclaims all implied warranties regarding the information contained herein, including, but not limited to, any implied warranties of merchantability or fitness for a particular purpose.

The dimensions in this catalog are for reference purposes only and are subject to change without notice. Specifications are subject to change without notice. Consult Tyco Electronics for the latest dimensions and design specifications.

**Outline Dimensions**

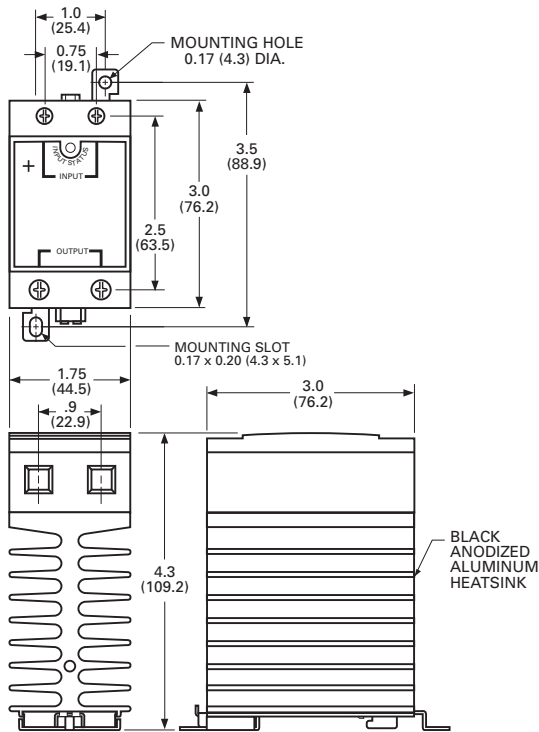

Recommended Torque Range for Terminal Screws:  
 Control: 5 - 6 in lb (0.6 - 0.7 Nm).  
 Output: 10 - 15 in lb (1.1 - 1.7 Nm).



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



#### Как с нами связаться

**Телефон:** 8 (812) 309 58 32 (многоканальный)

**Факс:** 8 (812) 320-02-42

**Электронная почта:** [org@eplast1.ru](mailto:org@eplast1.ru)

**Адрес:** 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.