

700DNC40-12-xG DC/DC CONVERTER



The Bel Power Solutions **700DNC40-12-xG** is a 4 kW DC/DC Converter that creates DC voltages in hybrid and electric vehicles necessary to power low voltage accessories.

Liquid or convection cooled DC/DC converter operates at input voltages from 400 to 800 VDC and power range up to 4000 W/3300 W (liquid/convection cooled model).

Key Features & Benefits

- Very high efficiency up to 93%
- Input voltage range: 400-800 VDC
- Up to 4 kW power
- Full galvanic isolation between input and output
- CAN bus serial interface
- E-MARK E12*10R00-10R05*13669
- Adjustable output voltage
- Over temperature, output overvoltage and overcurrent protection, input and output reverse polarity protection
- Liquid or convection cooled models available
- Protection degree IP65 and IP67

North America
+1.866.513.2839

Asia-Pacific
+86.755.29885888

Europe, Middle East
+353 61 225 977

700DNC40-12-xG

Model Selection

| MODEL | DESCRIPTION |
|---------------------|--|
| 700DNC40-12-8G | Liquid cooled model |
| 700DNC40-12-CG | Convection cooled model |
| 700DNC40-CON-KIT-8G | Mating connectors kit – Signal connector housing and pins, HV connector assembled with 3 m cable |
| 700DNC40-CON-KIT-9G | Mating connectors kit - housing and pins |

TECHNICAL DATA

Input

| PARAMETER | DESCRIPTION / CONDITION | MIN | NOM | MAX | UNIT |
|-------------------------|--|-----|-----|-----|------|
| Input Voltage | | 400 | 700 | 800 | VDC |
| Input Current | | | | 11 | ADC |
| Efficiency | @ Vin = 700 VDC, Vo = 14.4 V, I _{nom} = 229 A | 92 | | | % |
| Input Line Interruption | Converter shutdown | | | 390 | VDC |
| Input Capacitance | | | 35 | | μF |
| Inrush Current | External pre-charging circuit required | | | | |

Output

| PARAMETER | DESCRIPTION / CONDITION | MIN | NOM | MAX | UNIT |
|-------------------------------|--|-------|------------|----------------|--------------|
| Output Voltage | Vo to be trimmed via CAN BUS, 10 bit resolution | 9 | 14.4 | 16 | VDC |
| Output Current | @ 14.4 VDC Liquid cooled model Convection cooled model | | 278 229 | | ADC |
| Output Power | Liquid cooled model Convection cooled model | | | 4000 3300 | W |
| Line Regulation | V _{inmin} - V _{inmax} , @ 139 A, T _{coolant} = 70°C | - 0.1 | | + 0.1 | VDC |
| Output Voltage Set Point | @ 139 A, T _{coolant} = 25°C | 14.35 | 14.4 | 14.45 | VDC |
| Thermal Drift | | -0.05 | | +0.05 | %/°C |
| Periodic and Random Deviation | @ 14.4 VDC / Nominal load (Differential Mode 20 MHz) CAN high / low (Differential Mode 20 MHz) | | | 280 * 300 * | mVp-p |
| Transient Response | Load step 1: 10 to 50 % and back Load step 2: 50 to 100 % and back Voltage over/under shoot: Response time within 1 % of VoSET: | -1000 | | +1000 1000 | mV μs |
| Turn-on Overshoot | V _{onom} , <100 ms | | | 5 | % |
| Redundant Parallel Operation | Up to 4 converters operating in parallel | | | 16 | kW |
| Remote Sense | Cable Drop (V) @ Maximum Load | | | 0.5 | V |
| Turn-On Delay | Rise time (Cext = 0 μF) Power-on-delay (From applying DC input voltage to Vo = 90 %) Power-on-time from PS_WAKE UP (From PS_WAKE UP ON to Vo = 90% of nom) | | | 200 1 3 | ms s s |
| Turn-Off Timing | PS_WAKEUP delay; (monotonic Vo fall) | 0 | | 100 | ms |
| Capacitive Load | @ 14.4 VDC | | 0 | 10000 | μF |

* With external capacitors 47μF (Electrolytic cap) & 1μF (X7R Ceramic cap) connected to measuring point.

700DNC40-12-xG

Protection

| PARAMETER | DESCRIPTION / CONDITION | MIN | NOM | MAX | UNIT |
|--|--|------------|------------|------------|------|
| Output Over-Current Protection | Constant current Liquid cooled model Convection cooled model | | 285 235 | | A |
| Output Over-Voltage Protection | Latch type, max. OV duration 1 ms | 17 | | 18 | V |
| Output Under-Voltage Protection | Max. UV duration 1 s, than hiccup | 6 | | 8 | V |
| Over-Temperature Protection | Converter shutdown Liquid cooled model Convection cooled model | 80 50 | | | °C |
| Input and Output Reverse Polarity Protection | Protective elements connected in series | | | | |
| Input Fuse Protection | DC Input: internal primary fuse, safety approved | | 20 | | A |
| Input Low Line Protection | Turn ON threshold Turn OFF threshold | 390 370 | 400 380 | 410 390 | VDC |
| Input Overvoltage Protection | Recovery: Vin re-cycling or PS_WAKEUP | 810 | | 850 | V |

Interface & Control Signals

| PARAMETER | DESCRIPTION / CONDITION | |
|----------------------|--|---|
| CAN BUS SAE J1939 | 250 kBit/s or 500 kBit/s available | |
| Remote sense signals | Sense positive (+12 V SENSE) Sense negative (-12 V SENSE) | 0.5 V compensation |
| Address bits | Internally pulled up to LOGIC HIGH (3.3V 100kohm) | Adr. 0 Adr. 1 |
| PS_WAKEUP | Logic input signal | LV BAT VOLTAGE |
| HVIL function | HVIL pin shorted internally | Part of HV connector |
| CAN_SPEED | CAN speed selection Internally pulled up to LOGIC HIGH (3.3V 100kohm) | Logic Low – 250kBit/s Logic High – 500kBit/s |

Safety, Regulatory and EMC Specifications

| PARAMETER | DESCRIPTION / CONDITION | CRITERION |
|--------------------------------|--|------------------------------------|
| Safety certification | Report number: E12*10R00-10R05*13669 | E-MARK |
| Insulation | Basic: 3000 VDC | Input-to-Protective Earth |
| | Basic: 3000 VDC | Input-to-Output |
| Radiated Emission | UN ECE R10 4th Edition | ESA level |
| Electrostatic Discharge | IEC 61000-4-2 | Performance Criterion B |
| Radiated Electromagnetic Field | IEC 61000-4-3 (10 V/m), SAE J1113/21(100V/m) | Performance Criterion B Class B |
| Electrical Fast Transient | IEC 61000-4-4, Level 2 (+/-2 kV, 2.5 kHz) ISO 7637-2; ISO 7637-3, ISO 16750-2 | Performance Criterion B |
| RF Conducted Immunity | Level 3 (10 V, 0.15...80 MHz, AM 80%, 1kHz) | Performance Criterion A |
| RF Disturbances Immunity | SAE J1113-41 ISO11452-4 (1-400 MHz, 60 mA) | Class A Class B |

Environmental Specifications

| PARAMETER | DESCRIPTION / CONDITION | MIN | NOM | MAX | UNIT |
|-----------------------|--|--|-------------------|-------------------|------|
| Altitude | Operating: 62 kPa absolute pressure Non-Operating: 18.6 kPa absolute pressure | | | 3600 12200 | m |
| Operating Temperature | Liquid cooled model: Convection cooled model: | T_coolant with no derating T_amb @ full load, no power derating T_amb with no power derating | -40 -40 -40 | +70 +85 +45 | °C |
| Storage Temperature | | -40 | | +95 | °C |
| Humidity | SAE J1455 | | | | |
| Shock | SAE J1455 | | | | |
| Vibration | SAE J1455, MIL-STD-202G | | | | |

+353 61 225 977
tech.support@psbel.com
belpowersolutions.com

700DNC40-12-xG

Connectors

| PARAMETER | DESCRIPTION / CONDITION | MANUFACTURER | MPN |
|-------------------------------------|---|--------------|------------------|
| Input Connector (IN) | High voltage connector with HVIL function | TYCO | 2141272-1; KEY A |
| Output Connector (OUT) | Male dual terminal thread M8 | | |
| CAN BUS and Signal Interface (CTRL) | Panel mounted | TYCO | 776276-1 |

Cooling Specification

| PARAMETER | DESCRIPTION / CONDITION |
|-----------------------------------|--|
| Maximum Inlet Coolant Temperature | +70°C |
| Coolant Medium/Mixture | 50/50 Propylene or Ethylene Glycol/Water |
| Min Coolant Flow | 0.0208l/s (0.33GPM) |
| Max. coolant pressure | 20psi |
| Max. pressure drop | 1psi |




Signal Connector Pin Description

Signal Connector

Output Connector

Input Connector

| PIN | SIGNAL DESCRIPTION |
|-----|--------------------|
| 1 | PS_WAKEUP |
| 2 | ADR0 |
| 3 | ADR1 |
| 4 | CAN_SPEED |
| 5 | CAN_H |
| 6 | CAN_L |
| 7 | +SENSE |
| 8 | -SENSE |




Mechanical Specifications

| PARAMETER | LIQUID COOLED MODEL | CONVECTION COOLED MODEL |
|------------------------|----------------------|-------------------------|
| Dimensions (W x H x D) | 270 x 113.3 x 343 mm | 350 x 187.7 x 343 mm |
| Weight | 11 kg | 22 kg |
| Enclosure | IP65 and IP67 | |


700DNC40-12-xG

Mechanical Drawings - Liquid Cooled Model

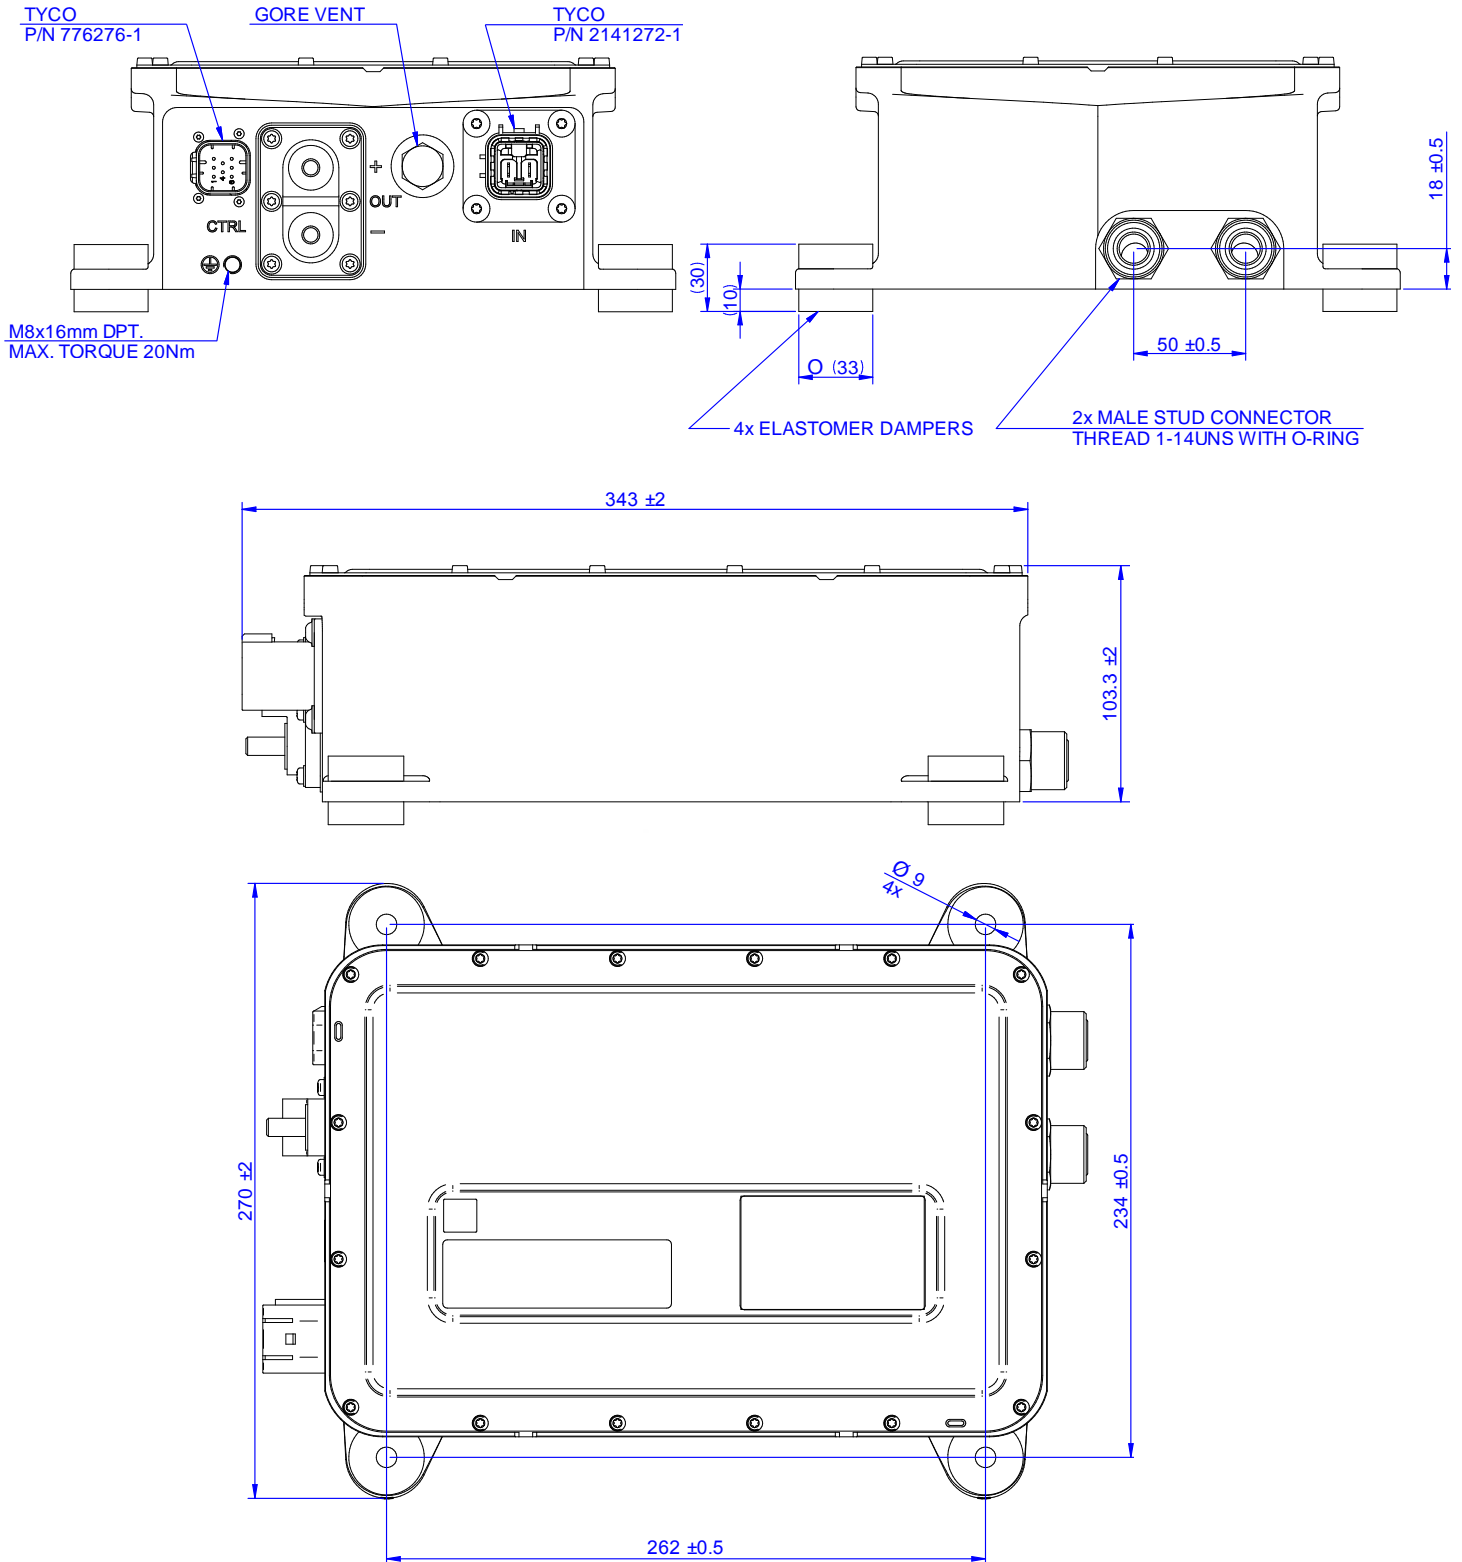

700DNC40-12-xG

Mechanical Drawings - Convection Cooled Model

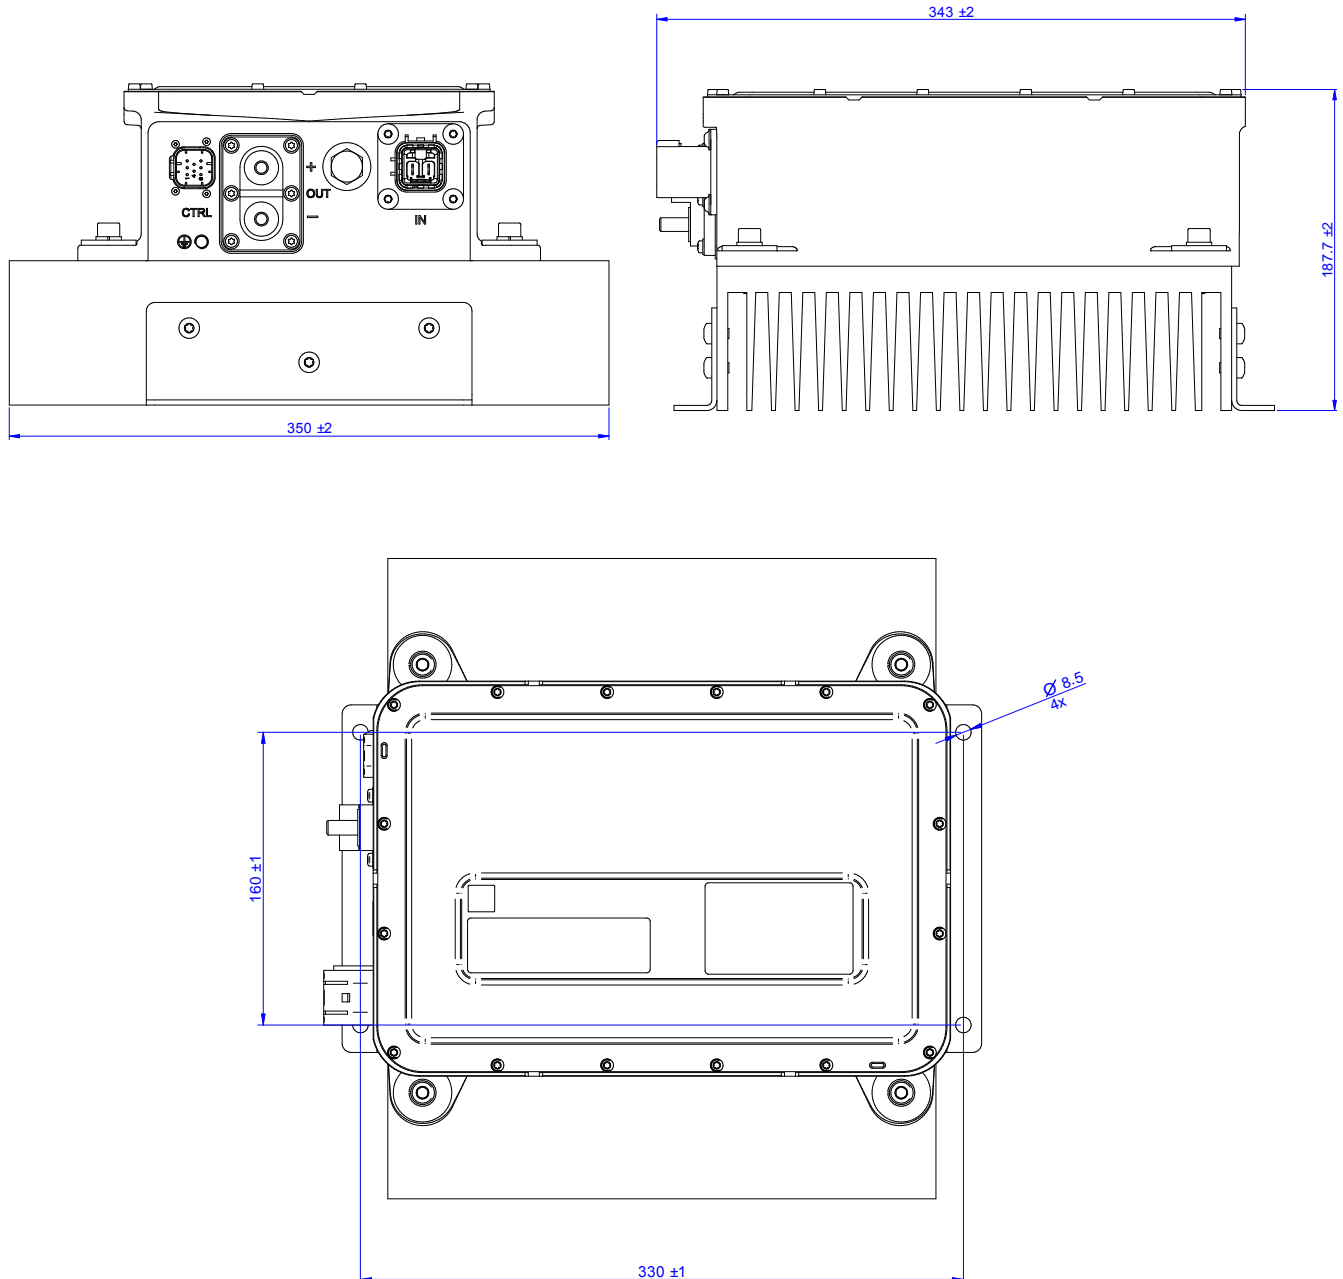

For more information on these products consult: tech.support@psbel.com

NUCLEAR AND MEDICAL APPLICATIONS - Products are not designed or intended for use as critical components in life support systems, equipment used in hazardous environments, or nuclear control systems.

TECHNICAL REVISIONS - The appearance of products, including safety agency certifications pictured on labels, may change depending on the date manufactured. Specifications are subject to change without notice.



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.