

**PI6C49S1510A**

**High Performance Differential Fanout Buffer**

**Features**

- 10 differential outputs with 2 banks
- User configurable output signaling standard for each bank: LVDS or LVPECL or HCSL
- LVC MOS reference output up to 200MHz
- Up to 1.5GHz output frequency for differential outputs
- Ultra low additive phase jitter: < 0.02 ps (typ) (differential 156.25MHz, 12KHz to 20MHz integration range); < 0.01 ps (typ) (differential 156.25MHz, 10kHz to 1MHz integration range)
- Selectable reference inputs support either single-ended or differential or Xtal
- Low skew between outputs within banks (<40ps)
- Low delay from input to output (Tpd typ. < 0.9ns)
- Separate Input output supply voltage for level shifting
- 2.5V / 3.3V power supply
- Industrial temperature support
- TQFN-48 package


**Description**

The PI6C49S1510A is a high performance fanout buffer device which supports up to 1.5GHz frequency. It also integrates a unique feature with user configurable output signaling standards on per bank basis which provide great flexibilities to users. The device also uses Pericom's proprietary input detection technique to make sure illegal input conditions will be detected and reflected by output states. This device is ideal for systems that need to distribute low jitter clock signals to multiple destinations.


**Applications**

- Networking systems including switches and Routers
- High frequency backplane based computing and telecom platforms

**Block Diagram**

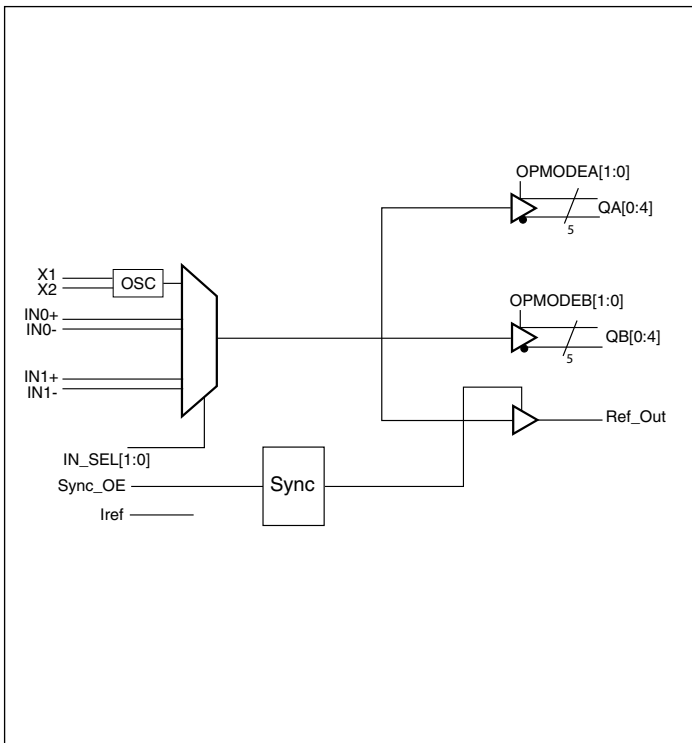

**Pin Configuration (48-TQFN)**

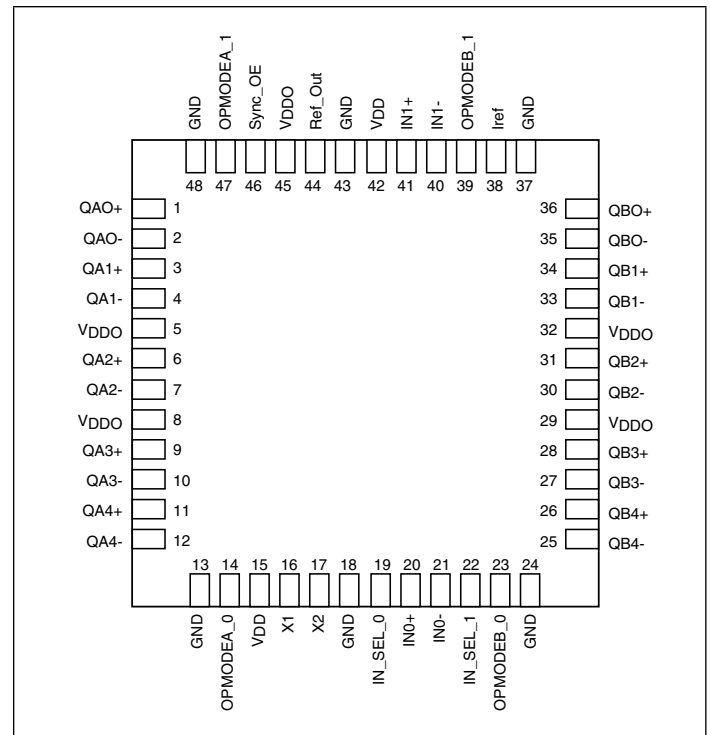

## Pin Description

Pin #	Pin Name	Type		Description
1,2	QA0+ QA0-	Output		Bank A differential output pair 0. Pin selectable LVPECL/LVDS/HCSL interface levels.
3,4	QA1+ QA1-	Output		Bank A differential output pair 1. Pin selectable LVPECL/LVDS/HCSL interface levels.
5,8,29,32,45	VDDO	Power		Power supply pins for IO
6,7	QA2+ QA2-	Output		Bank A differential output pair 2. Pin selectable LVPECL/LVDS/HCSL interface levels.
9,10	QA3+ QA3-	Output		Bank A differential output pair 3. Pin selectable LVPECL/LVDS/HCSL interface levels.
11,12	QA4+ QA4-	Output		Bank A differential output pair 4. Pin selectable LVPECL/LVDS/HCSL interface levels.
13,18,24,37,43,48	GND	Power		Power supply ground
14,47	OPMODEA	Input	Pulldown	Output mode select for Bank A. See Table 2 for functions, LVCMOS/LVTTL interface levels
15,42	V <sub>DD</sub>	Power		Power supply pins
16	X1	Input		XTAL input, can also be used as single ended input pin
17	X2	Output		XTAL output. If X1 is used as a single ended input pin, X2 is to be left open
19,22	IN_SEL	Input	Pulldown	Input clock select. See Table 1 for function. LVCMOS/LVTTL interface levels.
20	IN0+	Input	Pulldown	Reference input 0
21	IN0-	Input	Pull-up/ Pulldown	Inverted reference input 0, internal bias to V <sub>DD</sub> /2
23,39	OPMODEB	Input	Pulldown	Output mode select for Bank B. See Table 2 for functions, LVCMOS/LVTTL interface levels
26,25	QB4+ QB4-	Output		Bank B differential output pair 4. Pin selectable LVPECL/LVDS/HCSL interface levels.
28,27	QB3+ QB3-	Output		Bank B differential output pair 3. Pin selectable LVPECL/LVDS/HCSL interface levels.
31,30	QB2+ QB2-	Output		Bank B differential output pair 2. Pin selectable LVPECL/LVDS/HCSL interface levels.
34,33	QB1+ QB1-	Output		Bank B differential output pair 1. Pin selectable LVPECL/LVDS/HCSL interface levels.

### Pinout Description Cont.

Pin #	Pin Name	Type		Description
36,35	QB0+	Output		Bank B differential output pair 0. Pin selectable LVPECL/LVDS/HCSL interface levels.
	QB0-			
38	Iref	Output		A fixed precision resistor (475ohm) from this pin to ground provides a reference current for HCSL mode. If LVPECL or LVDS mode chosen, pin can be left open
40	IN1-	Input	Pull-up/ Pulldown	Inverted reference input, internal bias to $V_{DD}/2$
41	IN1+	Input	Pulldown	Reference input 1
44	Ref_Out	Output		Reference output, CMOS
46	Sync_OE	Input	Pulldown	Synchronous output enable for Ref_Out, see Table 3 for functions

### Function Table

Table 1: Input select function

IN_SEL [1]	IN_SEL [0]	Function
0	0	IN0 is the selected reference input
0	1	IN1 is the selected reference input
1	X	XTAL is the selected input

Table 2: Output Mode select function

OPMODEA/B [1]	OPMODEA/B [0]	Output Bank A / Bank B Mode
0	0	LVPECL
0	1	LVDS
1	0	HCSL
1	1	Hi-Z

Table 3: Reference output enable function

Sync_OE	Ref_Out
0	Hi-Z
1	Output enabled

Table 4: Illegal input level function

Input illegal status	Output status
Input open	Logic Low
Input both high	Logic Low
Input both low	Logic Low

**Maximum Ratings** (Above which the useful life may be impaired. For user guidelines, not tested)

Storage temperature.....	-55 to +150°C
Supply Voltage to Ground Potential ( $V_{DD}, V_{DDO}$ )...	-0.5 to +4.6V
Inputs (Referenced to GND) .....	-0.5 to $V_{DD}+0.5V$
Clock Output (Referenced to GND).....	-0.5 to $V_{DD}+0.5V$
Latch up .....	200mA
ESD Protection (Input) .....	2000 V min (HBM)
Junction Temperature .....	125 °C max

**Note:**

Stresses greater than those listed under MAXIMUM RATINGS may cause permanent damage to the device. This is a stress rating only and functional operation of the device at these or any other conditions above those indicated in the operational sections of this specification is not implied. Exposure to absolute maximum rating conditions for extended periods may affect reliability.

**Power Supply Characteristics and Operating Conditions**

Symbol	Parameter	Test Condition	Min.	Typ.	Max.	Units
$V_{DD}$	Core Supply Voltage		2.375		3.465	V
$V_{DDO}$	Output Supply Voltage		2.375		3.465	V
$I_{DD}$	Core Power Supply Current			90	120	mA
$I_{DDO}$	Output Power Supply Current	All LVPECL outputs unloaded		150	190	
		All LVDS outputs loaded		110	130	
		All HCSL outputs unloaded		80	120	
$T_A$	Ambient Operating Temperature <sup>1</sup>		-40		85	°C
$T_B$	PCB Operating Temperature <sup>1</sup>		-40		105	°C

Note 1: Either  $T_A$  or  $T_B$  used as operating condition

**DC Electrical Specifications - Differential Inputs**

Symbol	Parameter	Test Condition	Min.	Typ.	Max.	Units
$I_{IH}$	Input High current	Input = $V_{DD}$			150	uA
$I_{IL}$	Input Low current	Input = GND	-150			uA
$C_{IN}$	Input capacitance			3		PF
$V_{IH}$	Input high voltage				$V_{DD}+0.3$	V
$V_{IL}$	Input low voltage		-0.3			V
$V_{ID}$	Input Differential Amplitude PK-PK		0.15		$V_{DD}-0.85$	V
$V_{CM}$	Common mode input voltage		GND + 0.5		$V_{DD}-0.85$	V
$ISO_{MUX}$	MUX isolation			-89		dBc

### DC Electrical Specifications - LVCMOS Inputs

Symbol	Parameter	Conditions	Min.	Typ.	Max.	Units
I <sub>IH</sub>	Input High current	Input = V <sub>DD</sub>			150	uA
I <sub>IL</sub>	Input Low current	Input = GND	-150			uA
V <sub>IH</sub>	Input high voltage	V <sub>DD</sub> =3.3V	2.0		V <sub>DD</sub> +0.3	V
V <sub>IL</sub>	Input low voltage	V <sub>DD</sub> =3.3V	-0.3		0.8	V
V <sub>IH</sub>	Input high voltage	V <sub>DD</sub> =2.5V	1.7		V <sub>DD</sub> +0.3	V
V <sub>IL</sub>	Input low voltage	V <sub>DD</sub> =2.5V	-0.3		0.7	V

### DC Electrical Specifications- LVPECL Outputs

Parameter	Description	Conditions	Min.	Typ.	Max.	Units
V <sub>OH</sub>	Output High voltage		V <sub>DDO</sub> -1.4		V <sub>DDO</sub> -0.9	V
V <sub>OL</sub>	Output Low voltage		V <sub>DDO</sub> -2.2		V <sub>DDO</sub> -1.7	V

### DC Electrical Specifications- LVDS Outputs

Parameter	Description	Conditions	Min.	Typ.	Max.	Units
V <sub>OH</sub>	Output High voltage			1.43		V
V <sub>OL</sub>	Output Low voltage			1.0		V
V <sub>ocm</sub>	Output commode voltage			1.25		V
DV <sub>ocm</sub>	Change in V <sub>ocm</sub> between completely output states				50	mV
R <sub>o</sub>	Output impedance		85		140	Ω

### DC Electrical Specifications – HCSL Outputs

Parameter	Description	Conditions	Min.	Typ.	Max.	Units
V <sub>OH</sub>	Output High voltage		520		900	mV
V <sub>OL</sub>	Output Low voltage		-150		150	mV

### DC Electrical Specifications – LVCMOS Output

Parameter	Description	Conditions	Min.	Typ.	Max.	Units
V <sub>OH</sub>	Output High voltage	V <sub>DDO</sub> =3.3V +/-5%, I <sub>OH</sub> = 8mA	2.3			V
		V <sub>DDO</sub> =2.5V +/- 5%, I <sub>OH</sub> = 8mA	1.5			V
V <sub>OL</sub>	Output Low voltage	V <sub>DDO</sub> =3.3V +/-5%, I <sub>OL</sub> = -8mA			0.5	V
		V <sub>DDO</sub> =2.5V +/- 5%, I <sub>OL</sub> = -8mA			0.4	V
V <sub>OH</sub>	Output High voltage	V <sub>DDO</sub> =3.3V +/-5%, I <sub>OH</sub> = 24mA	2.1			V
		V <sub>DDO</sub> =2.5V +/- 5%, I <sub>OH</sub> = 16mA	1.5			V
V <sub>OL</sub>	Output Low voltage	V <sub>DDO</sub> =3.3V +/-5%, I <sub>OL</sub> = -24mA			1	V
		V <sub>DDO</sub> =2.5V +/- 5%, I <sub>OL</sub> = -16mA			0.8	V
R <sub>IUT</sub>	Output Impedance	V <sub>DDO</sub> = 3.3V ± 5%		17		Ω
		V <sub>DDO</sub> = 2.5V ± 5%		22		Ω

### AC Electrical Specifications – Differential Outputs

Parameter	Description	Conditions	Min.	Typ.	Max.	Units	
F <sub>OUT</sub>	Clock output frequency	LVPECL, LVDS			1500	MHz	
		HCSL			250		
T <sub>r</sub>	Output rise time	From 20% to 80%	LVPECL	120	150	300	ps
			LVDS	120	150	300	
			HCSL	300		700	
T <sub>f</sub>	Output fall time	From 80% to 20%	LVPECL	120	150	300	ps
			LVDS	120	150	300	
			HCSL	300		700	
T <sub>ODC</sub>	Output duty cycle	Frequency<650MHz, V <sub>ID</sub> ≥ 400mV	LVPECL, HCSL (<250MHz)	48		52	%
			LVDS	47		53	
		Frequency<1GHz, V <sub>ID</sub> ≥ 400mV	LVPECL	45		55	
			LVDS	45		55	
Frequency<1.5GHz, V <sub>ID</sub> ≥ 400mV	LVDS	40		60			
	Frequency<1.5GHz, V <sub>ID</sub> ≥ 400mV	LVPECL	40		60		
V <sub>PP</sub>	Output swing Single-ended	LVPECL outputs @ <1GHz	500		1100	mV	
		LVPECL outputs @ >1GHz	400		1000		
		LVDS outputs @ <1GHz	250		600		
		LVDS outputs @ >1GHz	250		550		

### AC Electrical Specifications – Differential Outputs Cont.

Parameter	Description	Conditions	Min.	Typ.	Max.	Units
T <sub>j</sub>	Buffer additive jitter RMS	156.25MHz, 12kHz to 20MHz		0.02		ps
		156.25MHz, 10kHz to 1MHz		0.01		ps
V <sub>CROSS</sub>	Absolute crossing voltage	HCSL		460		mV
DV <sub>CROSS</sub>	Total variation of crossing voltage	HCSL			140	mV
T <sub>SK</sub>	Output Skew	10 outputs devices, outputs in same tank, with same load, at DUT.		15	40	ps
T <sub>PD</sub>	Propagation Delay	LVPECL, LVDS @ 3.3V, 100MHz		570		ps
		HCSL @ 3.3V, 100MHz		900		ps
T <sub>OD</sub>	Valid to HiZ				80	ns
T <sub>OE</sub>	HiZ to valid				80	ns
T <sub>P2P Skew</sub>	Part to Part Skew <sup>1</sup>			80	120	ps

### AC Electrical Specifications – CMOS

Parameter	Description	Conditions	Min.	Typ.	Max.	Units
F <sub>OUT</sub>	Ref_Out frequency	XTAL input	10		50	MHz
		Reference input			200	MHz
T <sub>j</sub>	Buffer additive jitter RMS	XTAL input		0.3		ps
		Reference input		0.03		ps
t <sub>r</sub> /t <sub>f</sub>	Rise time, Fall time	C <sub>L</sub> = 10pF		1.5		ns
T <sub>ODC</sub>	Output duty cycle	C <sub>L</sub> = 10pF	45		55	%
t <sub>PD</sub>	Propagation delay	3.3V, 25MHz		2200		ps
t <sub>S</sub>	Setup time		300			ps
t <sub>SOD</sub>	Clock edge to output disable	Ref_Out	2		4	cycles
t <sub>SOE</sub>	Clock edge to output enable	Ref_Out	2		4	cycles

**Notes:**

1. This parameter is guaranteed by design

### Crystal Characteristics

Parameter	Min.	Typ.	Max.	Units
Mode of Oscillation	Fundamental			
Frequency Range	10		50	MHz
Equivalent Series Resistance (ESR)			70	$\Omega$
Shunt Capacitance			7	pF
Load Capacitance	10		18	pF
Drive Level			500	$\mu$ W


### Recommended Crystals

Pericom recommends:


- a) GC2500003 XTAL 49S/SMD(4.0 mm), 25M, CL=18pF, +/-30ppm  
[http://www.pericom.com/pdf/datasheets/se/GC\\_GF.pdf](http://www.pericom.com/pdf/datasheets/se/GC_GF.pdf)
- b) FY2500091, SMD 5x3.2(4P), 25M, CL=18pF, +/-30ppm  
[http://www.pericom.com/pdf/datasheets/se/FY\\_F9.pdf](http://www.pericom.com/pdf/datasheets/se/FY_F9.pdf)
- c) FL2500047, SMD 3.2x2.5(4P), 25M, CL=18pF, +/-20ppm  
<http://www.pericom.com/pdf/datasheets/se/FL.pdf>




**Propagation Delay**

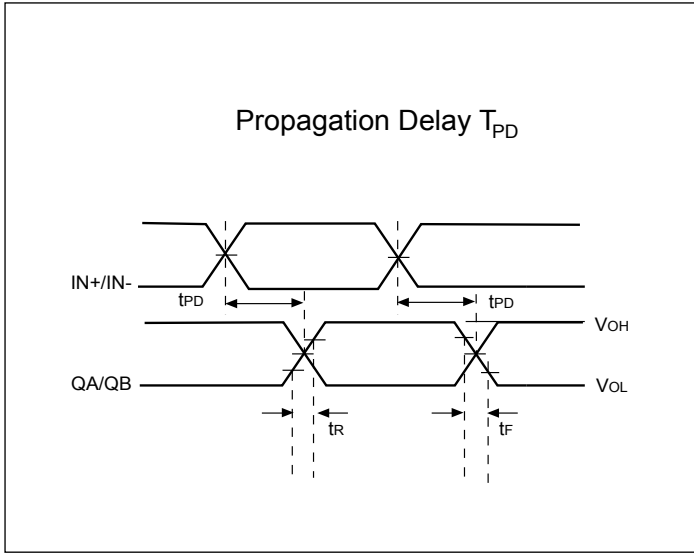



**Output Skew**

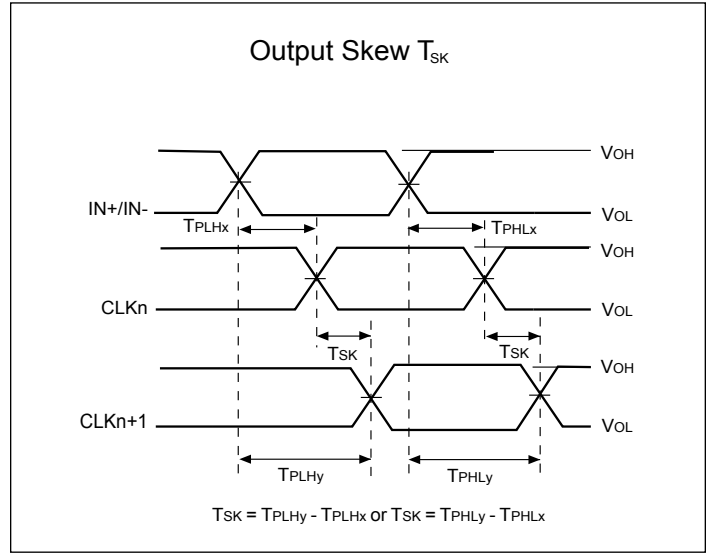


**Part to Part Skew**

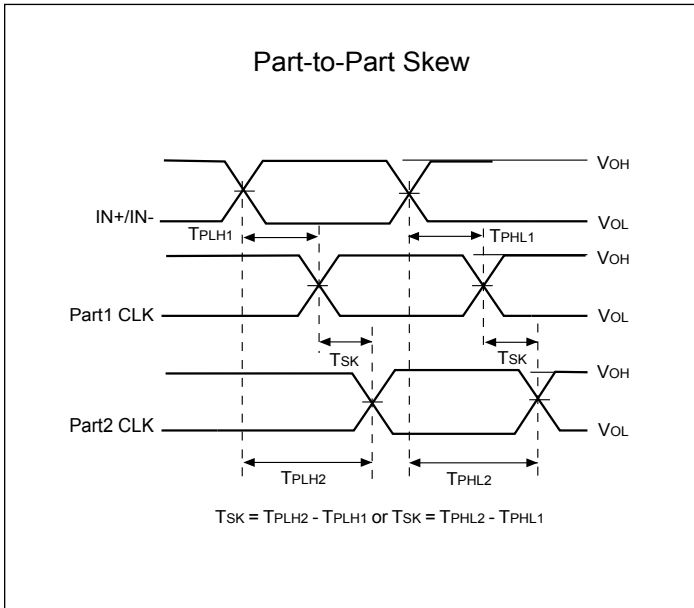


**LVPECL/ LVDS Output Swing vs. Frequency**

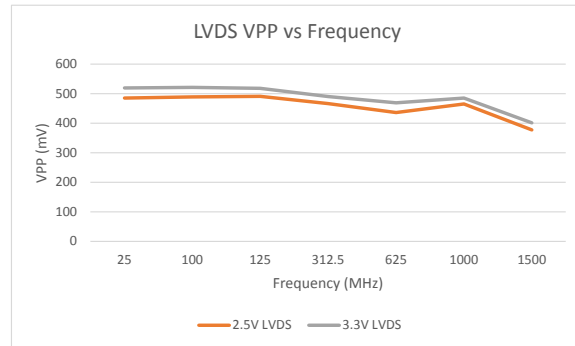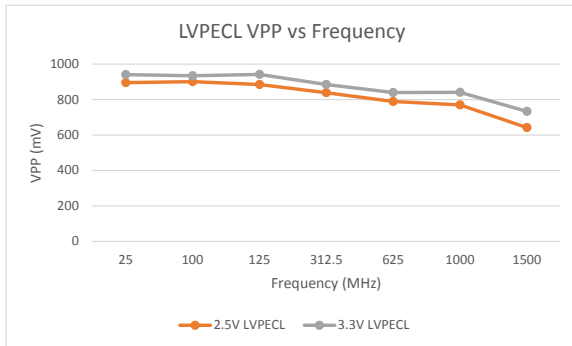


**Propagation Delay vs Temperature**

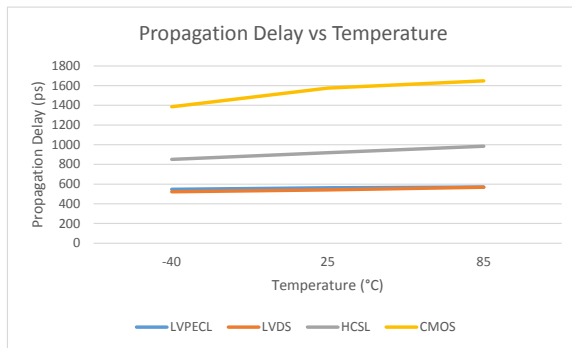


**1.5GHz LVPECL/ LVDS Waveform**

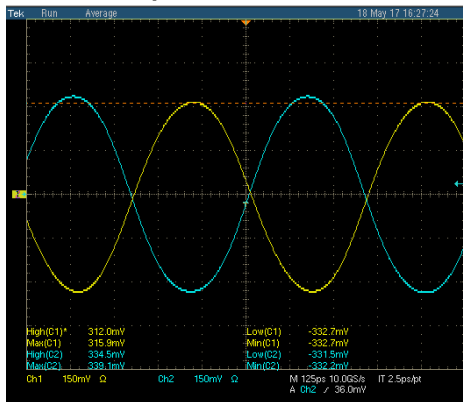


**2.5V LVPECL Waveform**

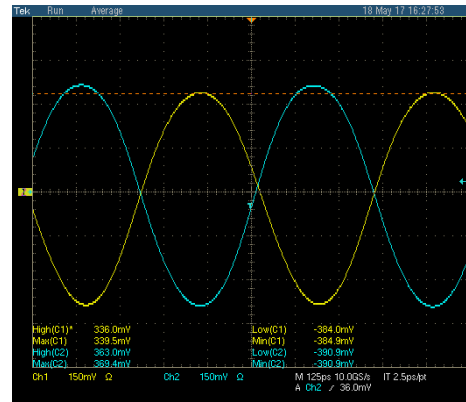

**3.3V LVPECL Waveform**

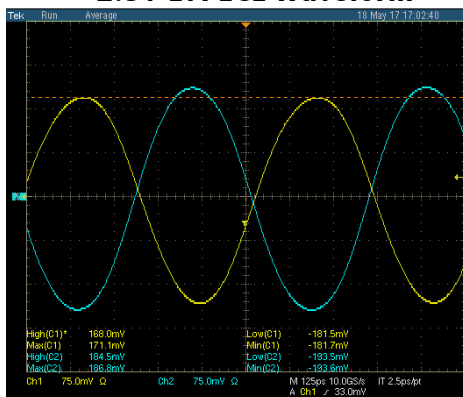

**2.5V LVDS Waveform**

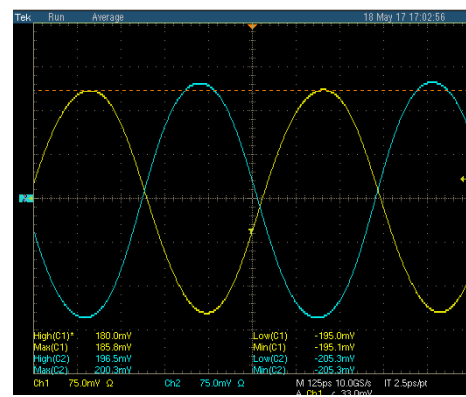


**3.3V LVDS Waveform**


### Phase Noise and Additive Jitter

Output phase noise (Dark Blue) vs Input Phase noise (light blue)


Additive jitter is calculated at 156.25MHz~27fs RMS (12kHz to 20MHz). Additive jitter =  $\sqrt{(\text{Output jitter}^2 - \text{Input jitter}^2)}$

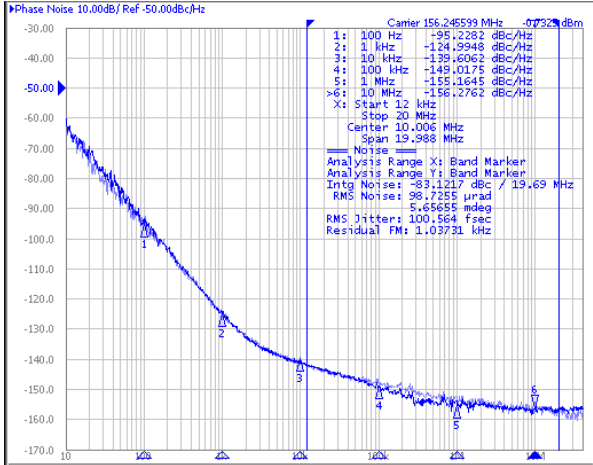


### Total phase jitter with 25MHz XTAL ~ 264fs RMS (12kHz ~20MHz)

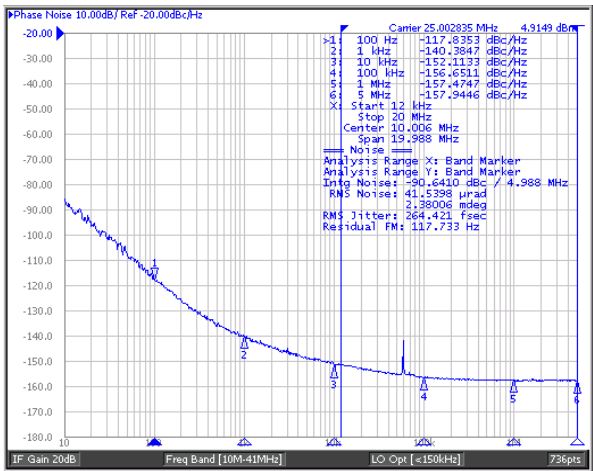


### Configuration Test Load Board Termination for LVPECL/ LVDS Outputs

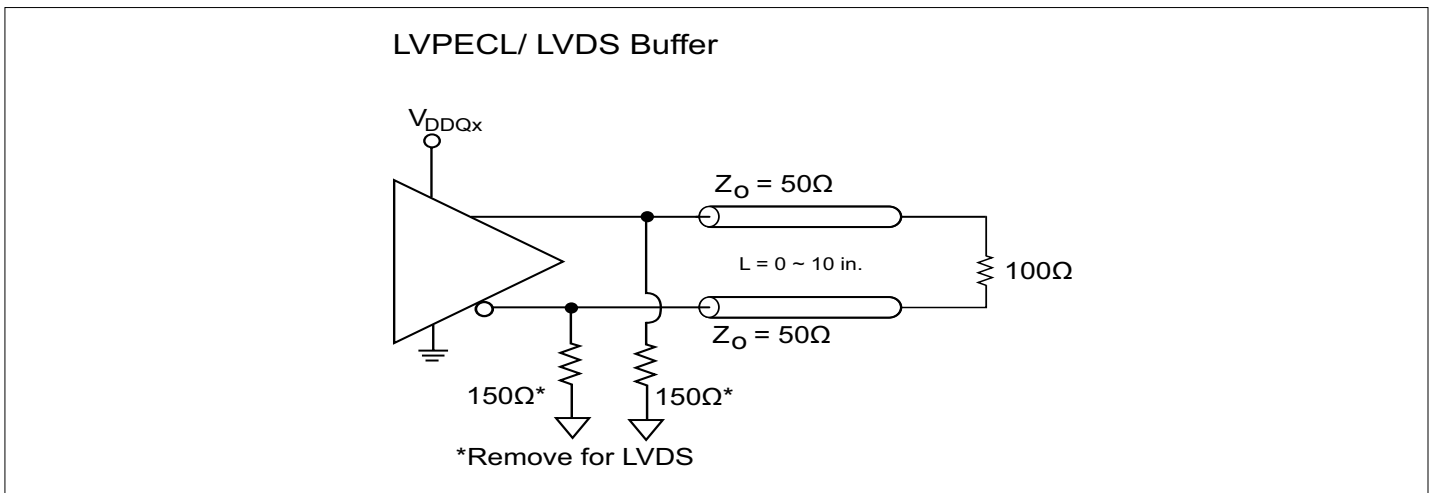

**Configuration Test Load Board Termination for HCSL Outputs**

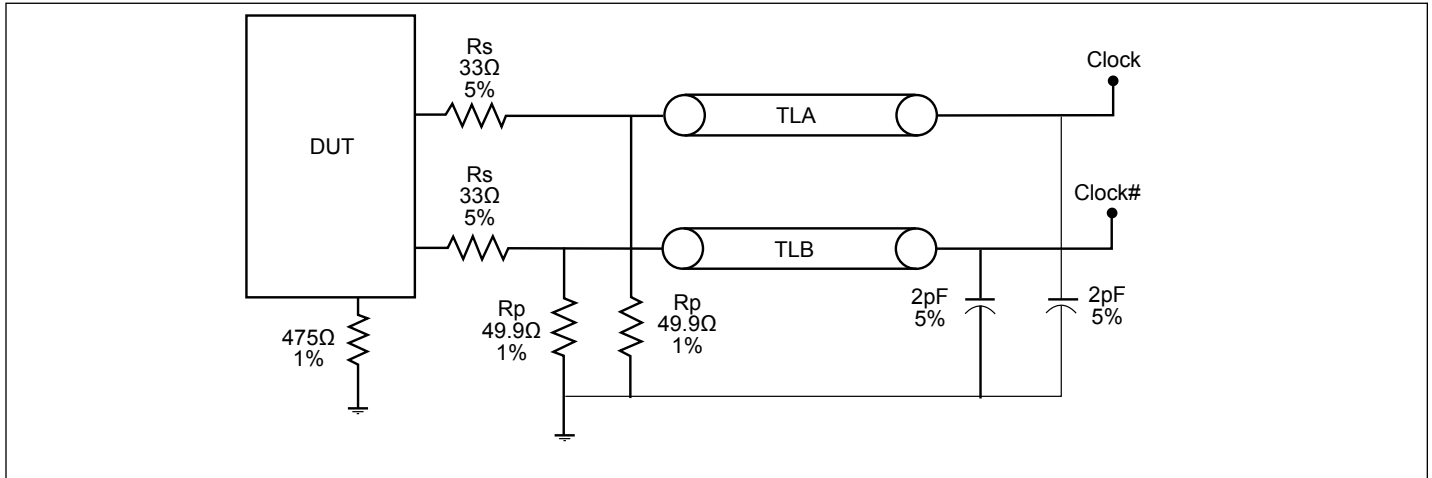

**Configuration Test Load Board Termination for LVCMOS Outputs**

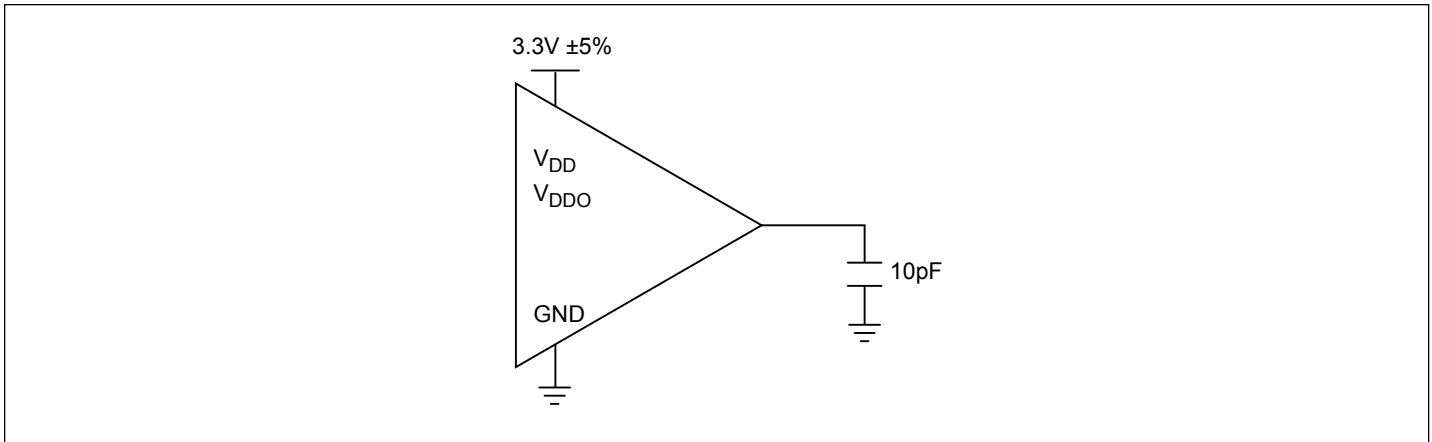

## Application Information

### Wiring the differential input to accept single ended levels

Figure 1 shows how the differential input can be wired to accept single ended levels. The reference voltage  $V_{REF} = V_{DD}/2$  is generated by the bias resistors R1, R2 and C1. This bias circuit should be located as close as possible to the input pin. The ratio of R1 and R2 might need to be adjusted to position the  $V_{REF}$  in the center of the input voltage swing. For example, if the input clock swing is only 2.5V and  $V_{DD} = 3.3V$ ,  $V_{REF}$  should be 1.25V and  $R1/R2 = 0.609$ .


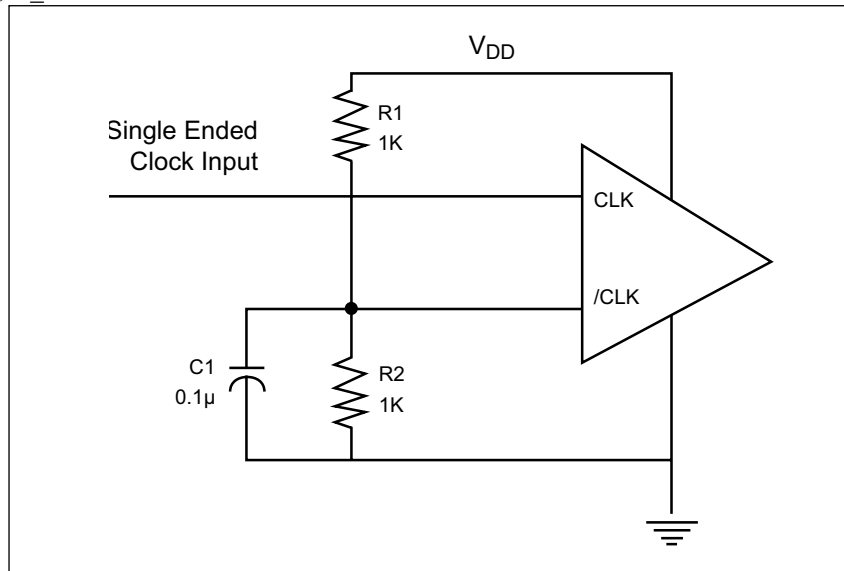


Figure 1. Single-ended input to Differential input device


## Power Supply Filtering Techniques

As in any high speed analog circuitry, the power supply pins are vulnerable to random noise. To achieve optimum jitter performance, power supply isolation is required. All power pins should be individually connected to the power supply plane through vias, and 0.1µF and 1µF bypass capacitors should be used for each pin.

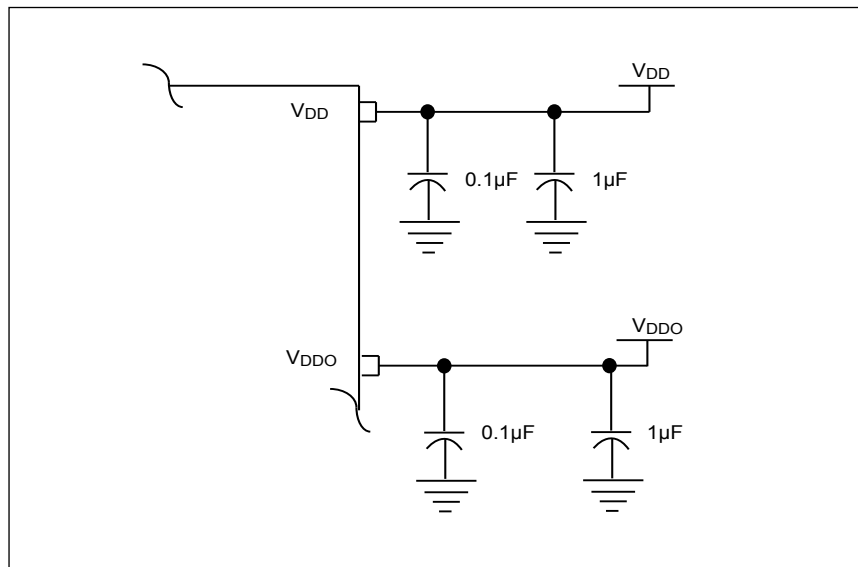


**PI6C49S1510A**


**Driving X1 with a Single Ended Input**

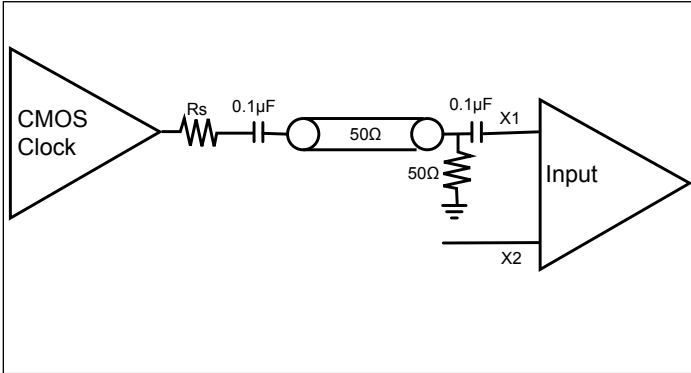


**Single Ended Input, AC couple**

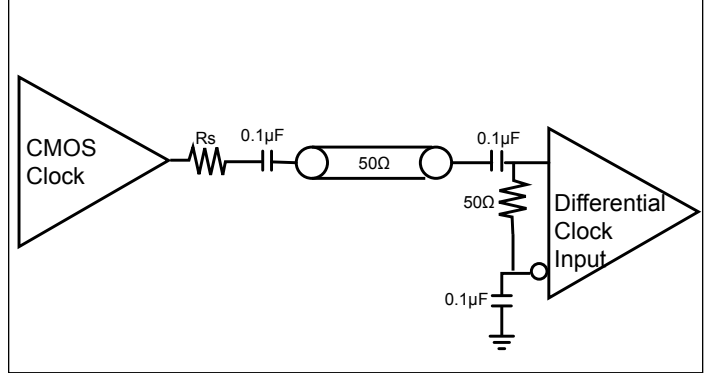


**Single Ended Input, DC couple**

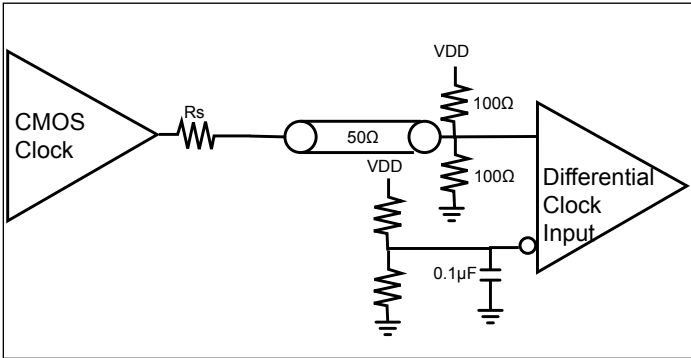


**Single Ended Input, DC couple**

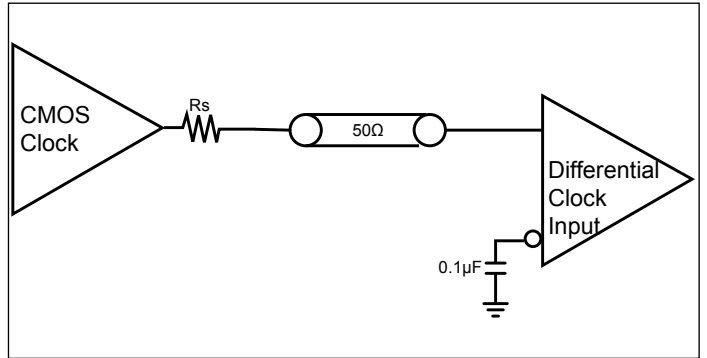


**LVPECL, AC Couple, Thevenin Equivalent**

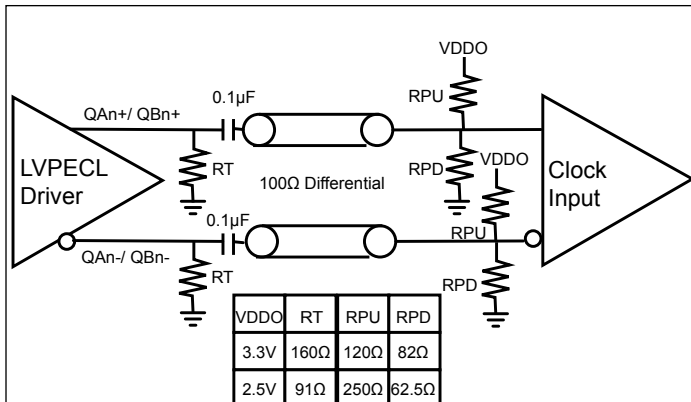


**LVPECL, DC Couple, Thevenin Equivalent**

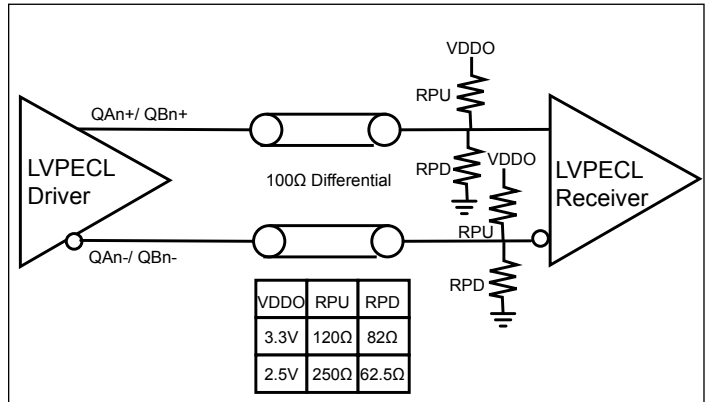


**LVDS DC Couple**

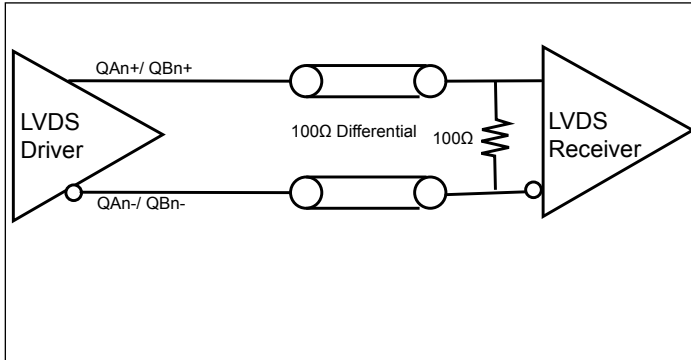


**LVDS AC Couple at Load**

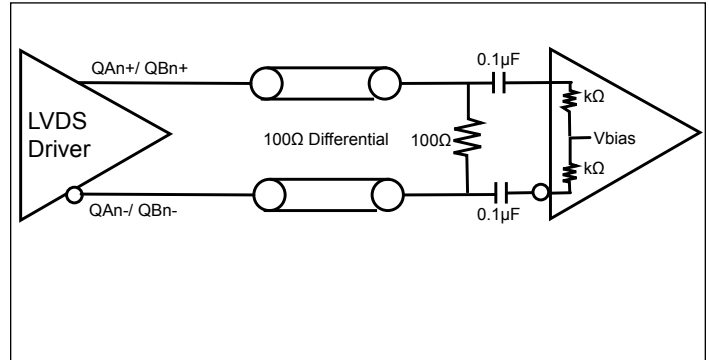


**LVDS AC Couple with Internal Termination**

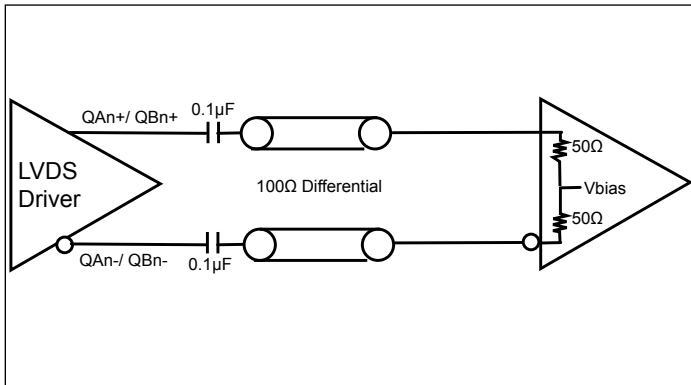


**Single Ended LVPECL, DC Couple**

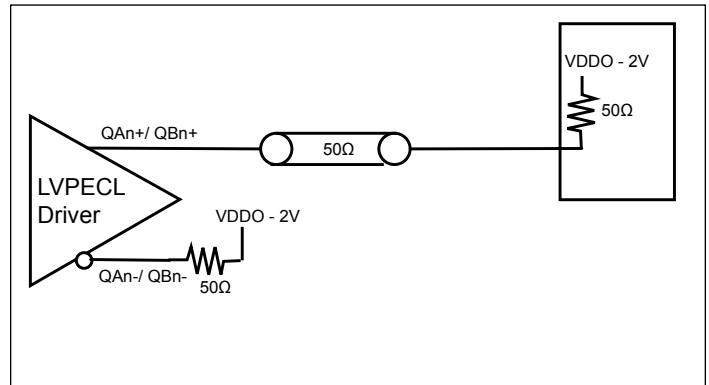

**Single Ended LVPECL, DC Couple, Thevenin Equivalent**

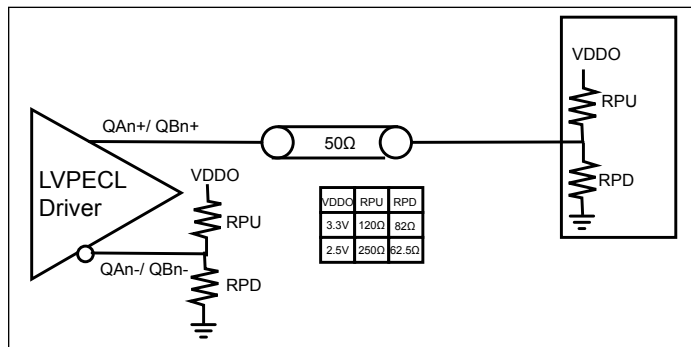


**Single Ended LVPECL, AC Couple, Thevenin Equivalent**

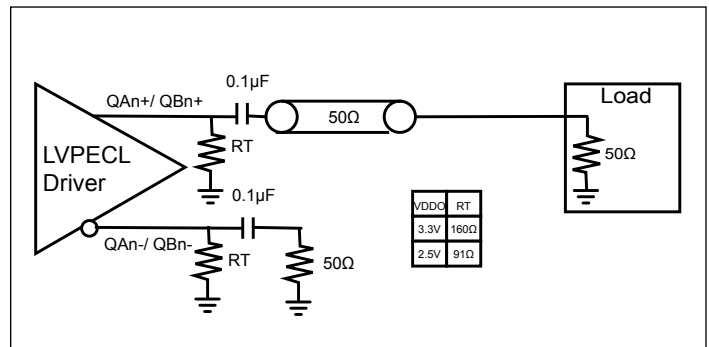


**PI6C49S1510A**

**Clock IC Crystal Input Guide**

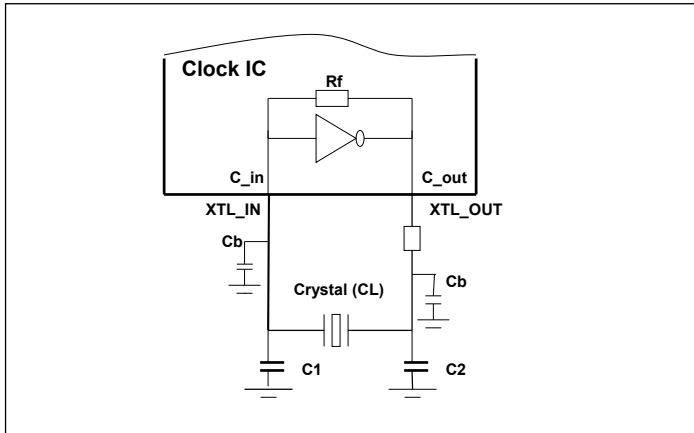


**LVPECL/ LVDS AC and DC input**

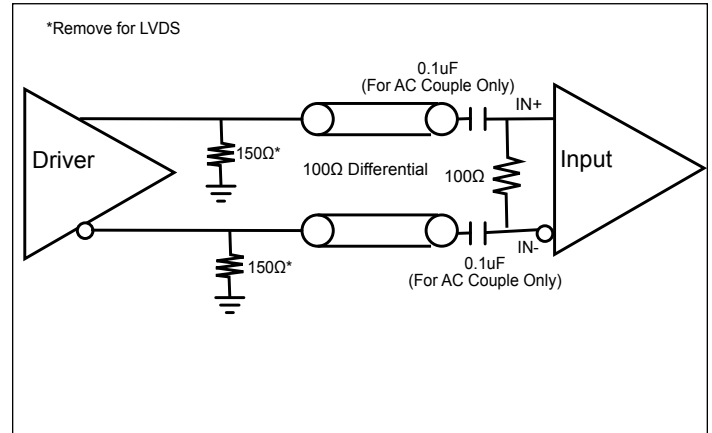



### Clock IC Crystal loading cap. design guide

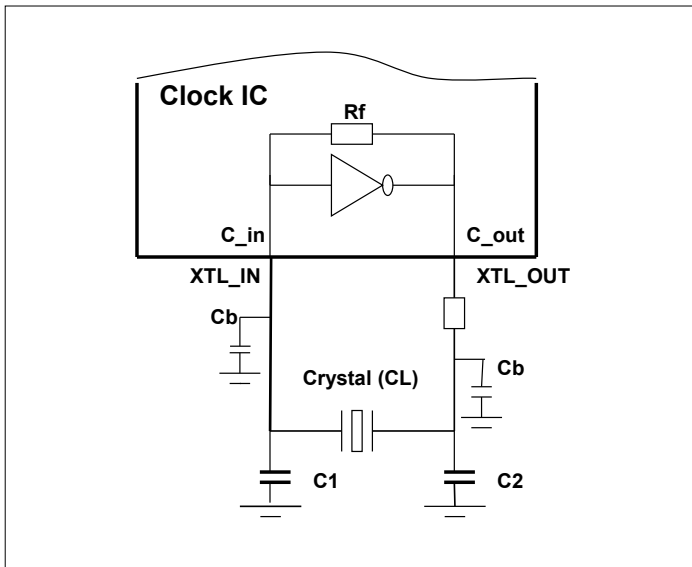

CL = crystal spec. loading cap.

C<sub>in/out</sub> = (3~5pF) of IC pin cap.

C<sub>b</sub> = PCB trace (2~4pF)

C<sub>1,C2</sub> = load cap. of design

R<sub>d</sub> = 50 to 100ohm drive level limit

Design guide:  $C1=C2=2 * CL - (Cb + C_{in/out})$  to meet target +/-ppm < 20 ppm

Example1: Select CL=18 pF crystal,  $C1=C2=2*(18pF) - (4pF+5pF)=27pF$ , check datasheet too


Example2: For higher frequency crystal (=>20MHz), can use formula  $C1=C2=2*(CL-6)$ , can do fine tune of C<sub>1</sub>, C<sub>2</sub> for more accurate ppm if necessary

### Thermal Information

Symbol	Description	Condition	
$\Theta_{JA}$	Junction-to-ambient thermal resistance	Still air	23.65 °C/W
$\Theta_{JC}$	Junction-to-case thermal resistance		9.10 °C/W


### Part Marking

ZD Package



YY : Year  
WW : Workweek  
1st X : Assembly Site Code  
2nd X : Wafer Site Code

**Packaging Mechanical: 48-TQFN (ZD)**

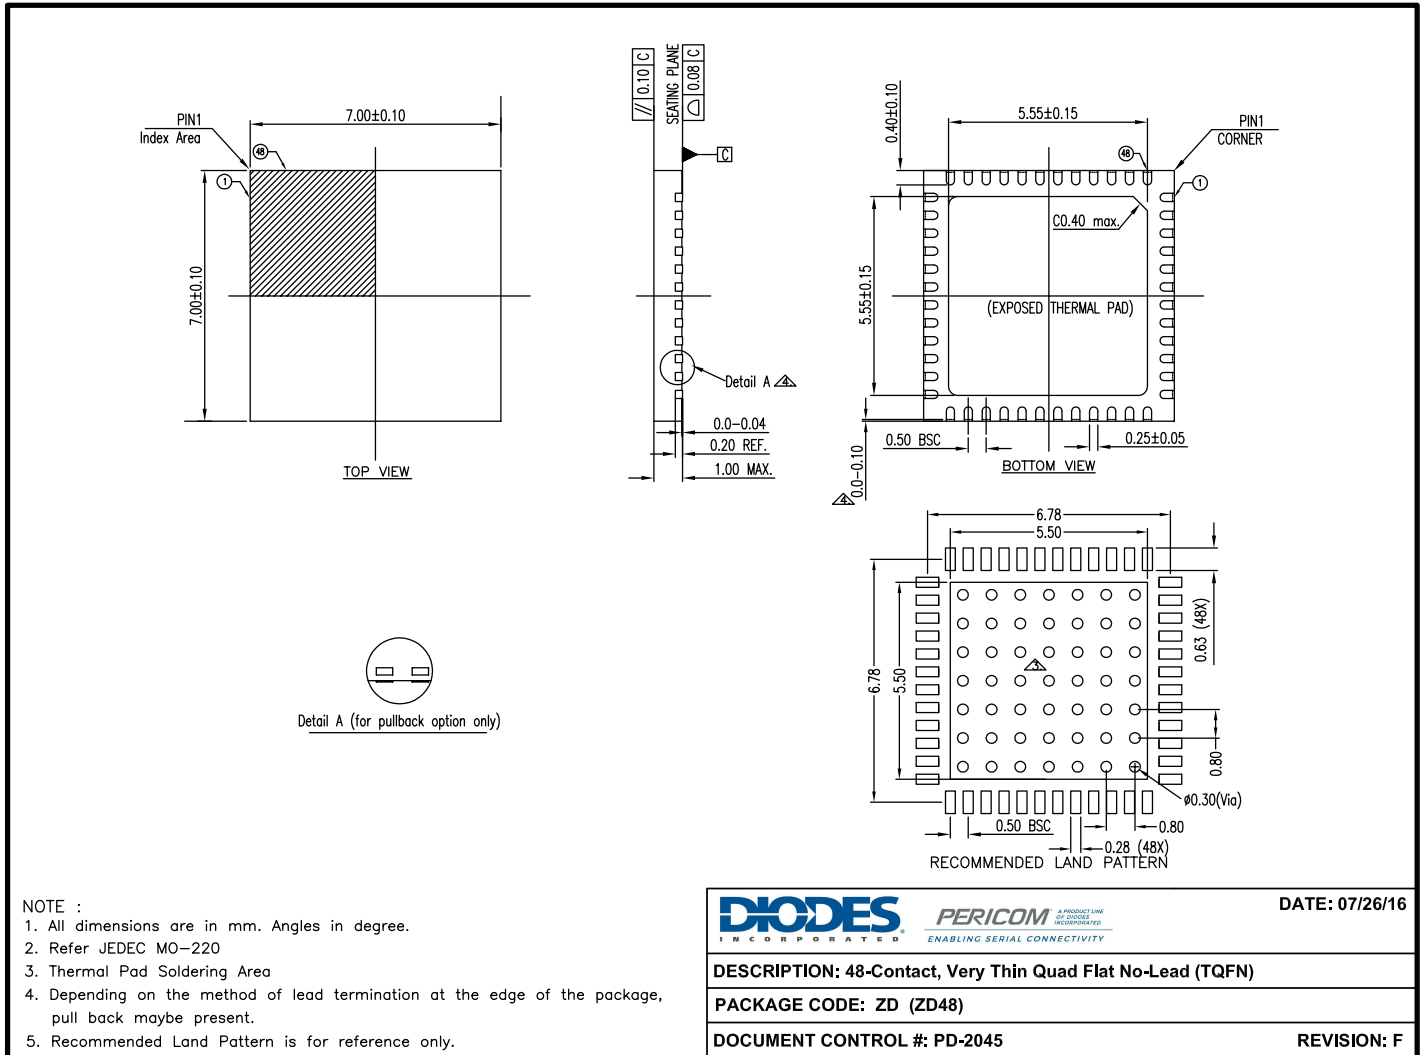

- NOTE :
1. All dimensions are in mm. Angles in degree.
  2. Refer JEDEC MO-220
  3. Thermal Pad Soldering Area
  4. Depending on the method of lead termination at the edge of the package, pull back maybe present.
  5. Recommended Land Pattern is for reference only.

16-0151

**For latest package info.**

please check: <http://www.diodes.com/design/support/packaging/pericom-packaging/packaging-mechanicals-and-thermal-characteristics/>

**Ordering Information**

Ordering Code	Package Code	Package Type	Operating Temperature
PI6C49S1510AZDIEX	ZD	48-Contact, Very Thin Quad Flat No-Lead (TQFN)	-40 °C to 85 °C

**Notes:**

1. EU Directive 2002/95/EC (RoHS), 2011/65/EU (RoHS 2) & 2015/863/EU (RoHS 3) compliant. All applicable RoHS exemptions applied.
2. See <http://www.diodes.com/quality/lead-free/> for more information about Diodes Incorporated's definitions of Halogen- and Antimony-free, "Green" and Lead-free. Thermal characteristics can be found on the company web site at [www.diodes.com/design/support/packaging/](http://www.diodes.com/design/support/packaging/)
3. E = Pb-free and Green
4. X suffix = Tape/Reel

**IMPORTANT NOTICE**

DIODES INCORPORATED MAKES NO WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, WITH REGARDS TO THIS DOCUMENT, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE (AND THEIR EQUIVALENTS UNDER THE LAWS OF ANY JURISDICTION).

Diodes Incorporated and its subsidiaries reserve the right to make modifications, enhancements, improvements, corrections or other changes without further notice to this document and any product described herein. Diodes Incorporated does not assume any liability arising out of the application or use of this document or any product described herein; neither does Diodes Incorporated convey any license under its patent or trademark rights, nor the rights of others. Any Customer or user of this document or products described herein in such applications shall assume all risks of such use and will agree to hold Diodes Incorporated and all the companies whose products are represented on Diodes Incorporated website, harmless against all damages.

Diodes Incorporated does not warrant or accept any liability whatsoever in respect of any products purchased through unauthorized sales channel.

Should Customers purchase or use Diodes Incorporated products for any unintended or unauthorized application, Customers shall indemnify and hold Diodes Incorporated and its representatives harmless against all claims, damages, expenses, and attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized application.

Products described herein may be covered by one or more United States, international or foreign patents pending. Product names and markings noted herein may also be covered by one or more United States, international or foreign trademarks.

This document is written in English but may be translated into multiple languages for reference. Only the English version of this document is the final and determinative format released by Diodes Incorporated.

**LIFE SUPPORT**

Diodes Incorporated products are specifically not authorized for use as critical components in life support devices or systems without the express written approval of the Chief Executive Officer of Diodes Incorporated. As used herein:

A. Life support devices or systems are devices or systems which:

1. are intended to implant into the body, or

2. support or sustain life and whose failure to perform when properly used in accordance with instructions for use provided in the labeling can be reasonably expected to result in significant injury to the user.

B. A critical component is any component in a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or to affect its safety or effectiveness.

Customers represent that they have all necessary expertise in the safety and regulatory ramifications of their life support devices or systems, and acknowledge and agree that they are solely responsible for all legal, regulatory and safety-related requirements concerning their products and any use of Diodes Incorporated products in such safety-critical, life support devices or systems, notwithstanding any devices- or systems-related information or support that may be provided by Diodes Incorporated. Further, Customers must fully indemnify Diodes Incorporated and its representatives against any damages arising out of the use of Diodes Incorporated products in such safety-critical, life support devices or systems.

Copyright © 2016, Diodes Incorporated

[www.diodes.com](http://www.diodes.com)



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



#### Как с нами связаться

**Телефон:** 8 (812) 309 58 32 (многоканальный)

**Факс:** 8 (812) 320-02-42

**Электронная почта:** [org@eplast1.ru](mailto:org@eplast1.ru)

**Адрес:** 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.