




75 Technology Drive
Lowell, MA 01851
PH: (978) 442-5600
FAX: (978) 937-3748

ENHANCED PERFORMANCE SURFACE MOUNT "EPSM" PACKAGED DEVICES

Features:

- Varactors, PIN Diodes, Limiter Diodes
- Frequencies from VHF to 6 GHz
- Lower Parasitics
- Mil Grade Ceramic/Epoxy Amalgam Construction
- Dense SiO₂ Junction Passivation
- Superior Consistency/Repeatability
- Footprints Available for SOT-23/SOD-323/SOD-123
- Dozens of Values and Configurations
- Priced for Commercial Products
- Tape & Reel for Volume Pick & Place

KV1913A - KV1993A
KV2163 - KV2113
GC1300 - GC1310
LSP1000 - LSP1012

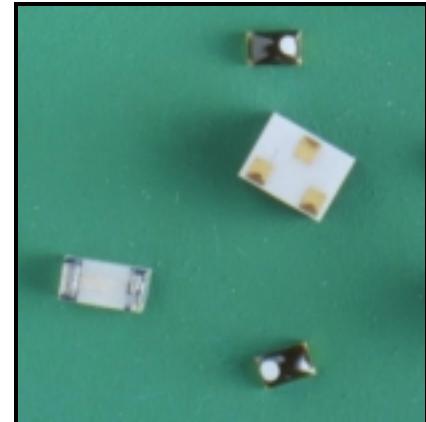

DESCRIPTION:

Our EPSM packaged devices are designed for the most demanding commercial and Military requirements where the inconsistency of performance inherent in plastic surface mount packages cannot be tolerated. These package styles extend the surface mount construction format to 6 GHz for high performance wireless applications including VCO's, limiters, pin switches and pin attenuators. Select varactors from three families of C/V curves, PIN diodes for switching, attenuation or limiting through 6 GHz. They are available in multiple chip configuration as well as outlines which directly replace SOT-23 and SOD-323 devices. Other devices and values are always available - contact our applications engineering department for more details.

APPLICATIONS

- High performance wireless surface mounting including:
 - GSM
 - TAGS
 - WANS
 - PCS
 - AMPS
 - DECT
 - CELLULAR

PIN DIODE DEVICES FOR WIRELESS ATTENUATORS, SWITCHES AND LIMITERS

ABSOLUTE MAXIMUM RATINGS AT 25°C

Forward Current (I _F):	1 Amp (1μs Pulse)
Power Dissipation (P _D):	500 mW (Derate to 0 at max T _J)
Peak Inverse Volts (PIV):	Same as V _B
Junction Temp. (Operating):	-65°C to + 125°C
Storage Temp. (Non-Operating):	-65°C to + 125°C
Leakage:	<50 nA @ 80% V _B @ 25°C

TEST CONDITIONS:

V_B @ 10 μA R_S @ 100 MHz
C_T @ 1 MHz T_L @ I_F = 10 mA
I_R = 6 mA

TABLE 1					
MODEL	V _B	C _T @ V _R MAX.	R _S @ I _F MAX.	T _L TYP.	APPLIC-TION
LSP1000	> 35	.28 @ 5V	2.5Ω @ 5 mA	80nS	SWITCH
LSP1002	> 100	.32 @ 50V	4Ω @ 100 mA	1500nS	ATTENUATOR
LSP1004	> 35	.75 @ 20V	0.6Ω @ 10 mA	150nS	SWITCH
LSP1011	> 200V	.35 @ 50V	2Ω @ 100 mA	2000nS	ATTENUATOR
LSP1012	> 20V	.35pF @ 10V	1.8Ω @ 10 mA	5nS	LIMITER



KV1913A - KV1993A
KV2163 - KV2113
GC1300 - GC1310
LSP1000 - LSP1012

**ENHANCED PERFORMANCE
SURFACE MOUNT "EPSM" VARACTORS**

KV1900A SUPER HYPERABRUPT VARACTORS FOR 1 - 8 VOLT HIGH SENSITIVITY VCO'S

MODEL	C _{T1}	C _{T2.5}	C _{T4}	C _{T8}	Q (4V / 50MHz)
KV1913A	> 36 pF	18 - 27 pF	< 12.0 pF	< 6.20 pF	400
KV1953A	> 26 pF	13 - 20 pF	< 9.0 pF	< 4.70 pF	500
KV1923A	> 17 pF	8.5 - 13 pF	< 6.0 pF	< 3.20 pF	600
KV1933A	> 13 pF	6.5 - 10 pF	< 4.5 pF	< 2.70 pF	750
KV1943A	> 9 pF	4.5 - 6.5 pF	< 3.0 pF	< 1.70 pF	900
KV1963A	> 4 pF	2.0 - 3.0 pF	< 1.5 pF	< 1.00 pF	1200
KV1973A	> 1.8 pF	1.1 - 1.5 pF	< 0.8 pF	< 0.55 pF	1400
KV1983A	> 1.2 pF	0.8 - 1.1 pF	< 0.6 pF	< 0.45 pF	1600
KV1993A	> 0.6 pF	0.5 - 0.8 pF	< 0.4 pF	< 0.35 pF	1800

RATINGS: V_B @ 10µA > 12V I_R @ 10V < 50 nA @ 25°C

KV2100 MICROWAVE HYPERABRUPT VARACTORS FOR 2 - 15 VOLT WIDE BANDWIDTH VCO'S

MODEL	C _{T0 TYPICAL}	C _{T4}	C _{T20 MAX}	Q (4V / 50MHz)
KV2163	26 pF	8.75 - 10.80 pF	2.50 pF	> 400
KV2153	13.5 pF	4.45 - 5.50 pF	1.30 pF	> 600
KV2143	7 pF	2.65 - 3.30 pF	0.90 pF	> 700
KV2133	5 pF	1.75 - 2.20 pF	0.70 pF	> 850
KV2123	3 pF	1.30 - 1.65 pF	0.55 pF	> 1000
KV2113	2 pF	0.85 - 1.10 pF	0.45 pF	> 1200

Ratings: V_B @ 10µA > 22V I_R @ 20V < 50 nA @ 25°C

**GC1300 MICROWAVE ABRUPT VARACTORS
FOR 0-30 VOLT MODERATE BANDWIDTH LOW NOISE VCO'S**

MODEL	C _{T0/CT4}	C _{T4 ± 10%}	C _{T4/ C_{T30}}	Q (4V / 50MHz)
GC1300	> 1.5	0.8 pF	> 1.45	> 3900
GC1301	> 1.6	1.0 pF	> 1.55	> 3800
GC1302	> 1.7	1.2 pF	> 1.60	> 3700
GC1303	> 1.8	1.5 pF	> 1.65	> 3600
GC1304	> 1.9	1.8 pF	> 1.70	> 3500
GC1305	> 2.0	2.2 pF	> 1.75	> 3400
GC1306	> 2.0	2.7 pF	> 1.80	> 3300
GC1307	> 2.1	3.3 pF	> 1.85	> 3100
GC1308	> 2.1	3.9 pF	> 1.85	> 2700
GC1309	> 2.1	4.7 pF	> 1.85	> 2600
GC1310	> 2.1	5.6 pF	> 1.85	> 2500

RATINGS: V_B @ 10µA > 30V I_R @ 25V < 50 nA @ 25°C

**KV1913A - KV1993A
KV2163 - KV2113
GC1300 - GC1310
LSP1000 - LSP1012**

EPSM AVAILABLE CONFIGURATIONS

Figure 1 Outline Style 150(X)

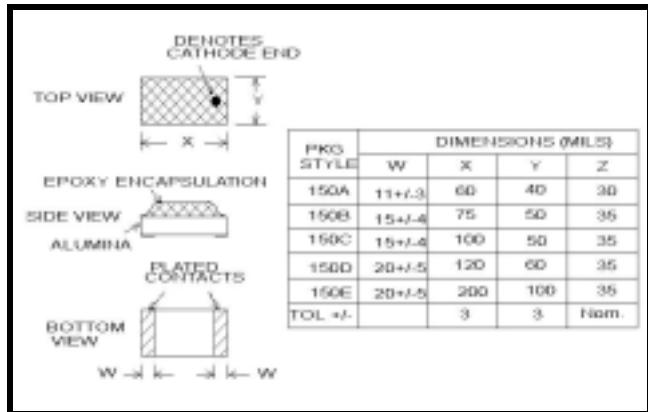


Figure 2 Outline Style 154

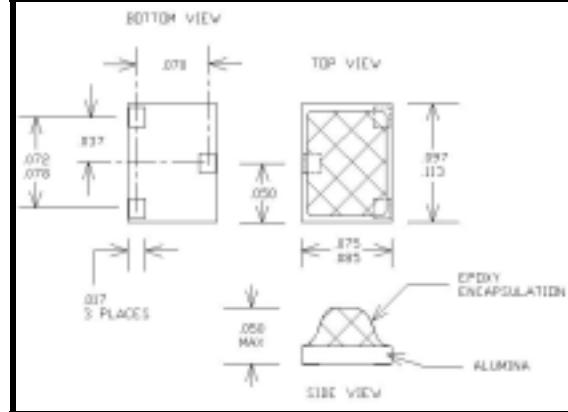


Figure 3 Outline Style 250(X)

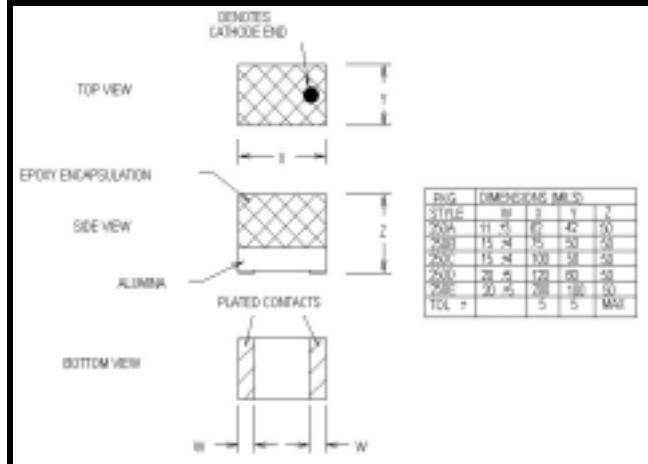


Figure 4 Outline Style 254

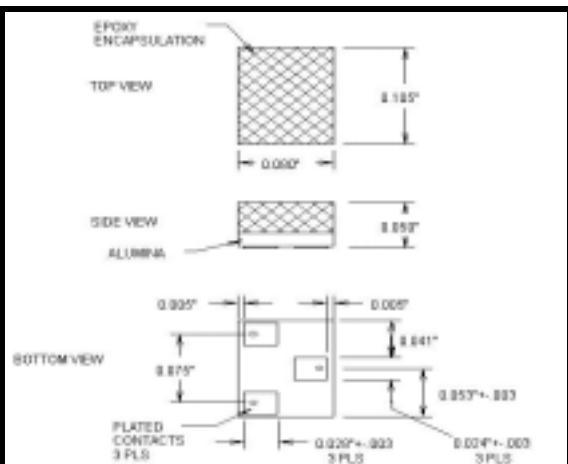


Figure 5 Outline Style 350(X)


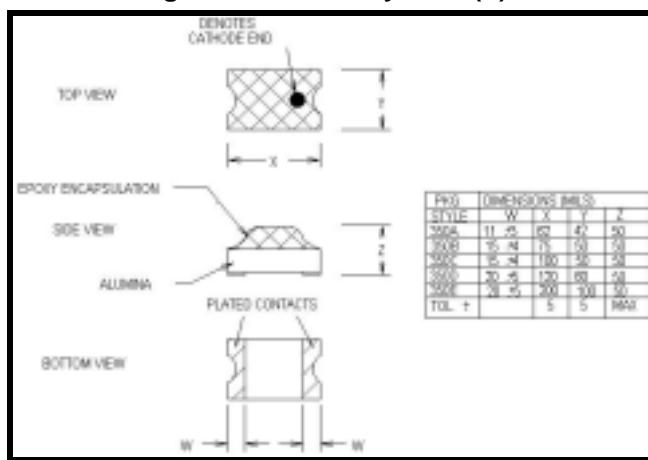


Figure 6 Outline Style 252A



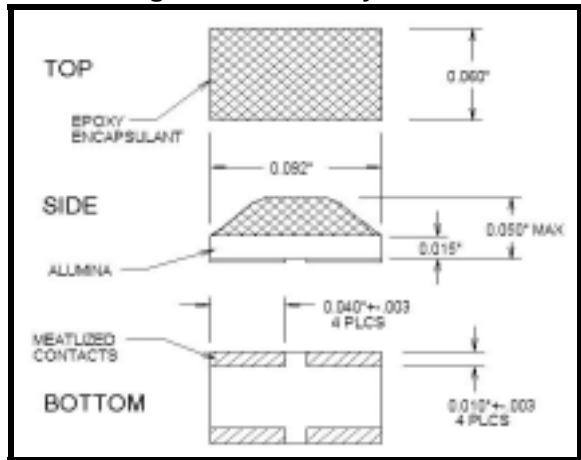

Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помошь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помошь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.