

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number: [0850560048](#)
Status: **Active**
Overview: [din_41612](#)
Description: 2.54mm (.100") Pitch DIN 41612/IEC 603-2 Mixed Layout Connector, Female Style M Inverse, 60 Circuits, Lead free

Documents:

[3D Model](#) [RoHS Certificate of Compliance \(PDF\)](#)
[Drawing \(PDF\)](#)

Agency Certification


CSA LR19980
UL E29179

General

Product Family Backplane Connectors
Series [85056](#)
Application Backplane
Component Type PCB Receptacle
Overview [din_41612](#)
Product Name IEC 603-2/DIN 41612
Style M

Physical

Circuits (Loaded) 60
Circuits (maximum) 64
Circuits Detail Standard Contacts at A:a7-a26; B:b7-b26; C:c7-c26
Durability (mating cycles max) 400
First Mate / Last Break No
Flammability 94V-0
Guide to Mating Part No
Keying to Mating Part Yes
Material - Plating Mating Gold
Material - Plating Termination Tin
Number of Columns 20
Number of Pairs Open Pin Field
Number of Rows 3
Orientation Right Angle
PC Tail Length (in) 0.110 In
PC Tail Length (mm) 2.80 mm
PCB Locator No
PCB Retention Yes
PCB Thickness Recommended (in) 0.063 In, 0.126 In
PCB Thickness Recommended (mm) 1.60 mm, 3.20 mm
Packaging Type Tray
Pitch - Mating Interface (in) 0.100 In
Pitch - Mating Interface (mm) 2.54 mm
Pitch - Term. Interface (in) 0.100 In
Pitch - Term. Interface (mm) 2.54 mm
Plating min: Mating (µin) 24
Plating min: Mating (µm) 0.60
Polarized to PCB Yes
Stackable No
Surface Mount Compatible (SMC) No
Temperature Range - Operating -55°C to +125°C
Termination Interface: Style Through Hole

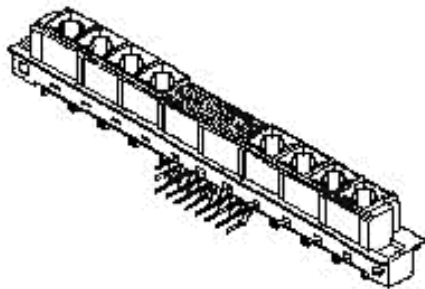

Series

image - Reference only

EU RoHS

**ELV and RoHS
Compliant**

REACH SVHC

Not Reviewed

Halogen-Free

Status

Not Reviewed

China RoHS



**Need more information on product
environmental compliance?**

Email productcompliance@molex.com
For a multiple part number RoHS Certificate of
Compliance, [click here](#)

Please visit the [Contact Us](#) section for any
non-product compliance questions.

Search Parts in this Series

[85056Series](#)

Mates With

DIN 41612/EIC 603-2 Mixed Layout
Connectors [85009](#) , [85017](#)

Use With

[85022](#) DIN 41612 High Current Contact

Electrical

Current - Maximum per Contact	2.5A
Data Rate	622.0 Mbps
Real Signals (per 25mm)	30
Voltage - Maximum	250V AC (RMS)


Material Info

Reference - Drawing Numbers

Sales Drawing	SD-85056-0002, SD-85056-0048
---------------	------------------------------

This document was generated on 05/17/2010

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

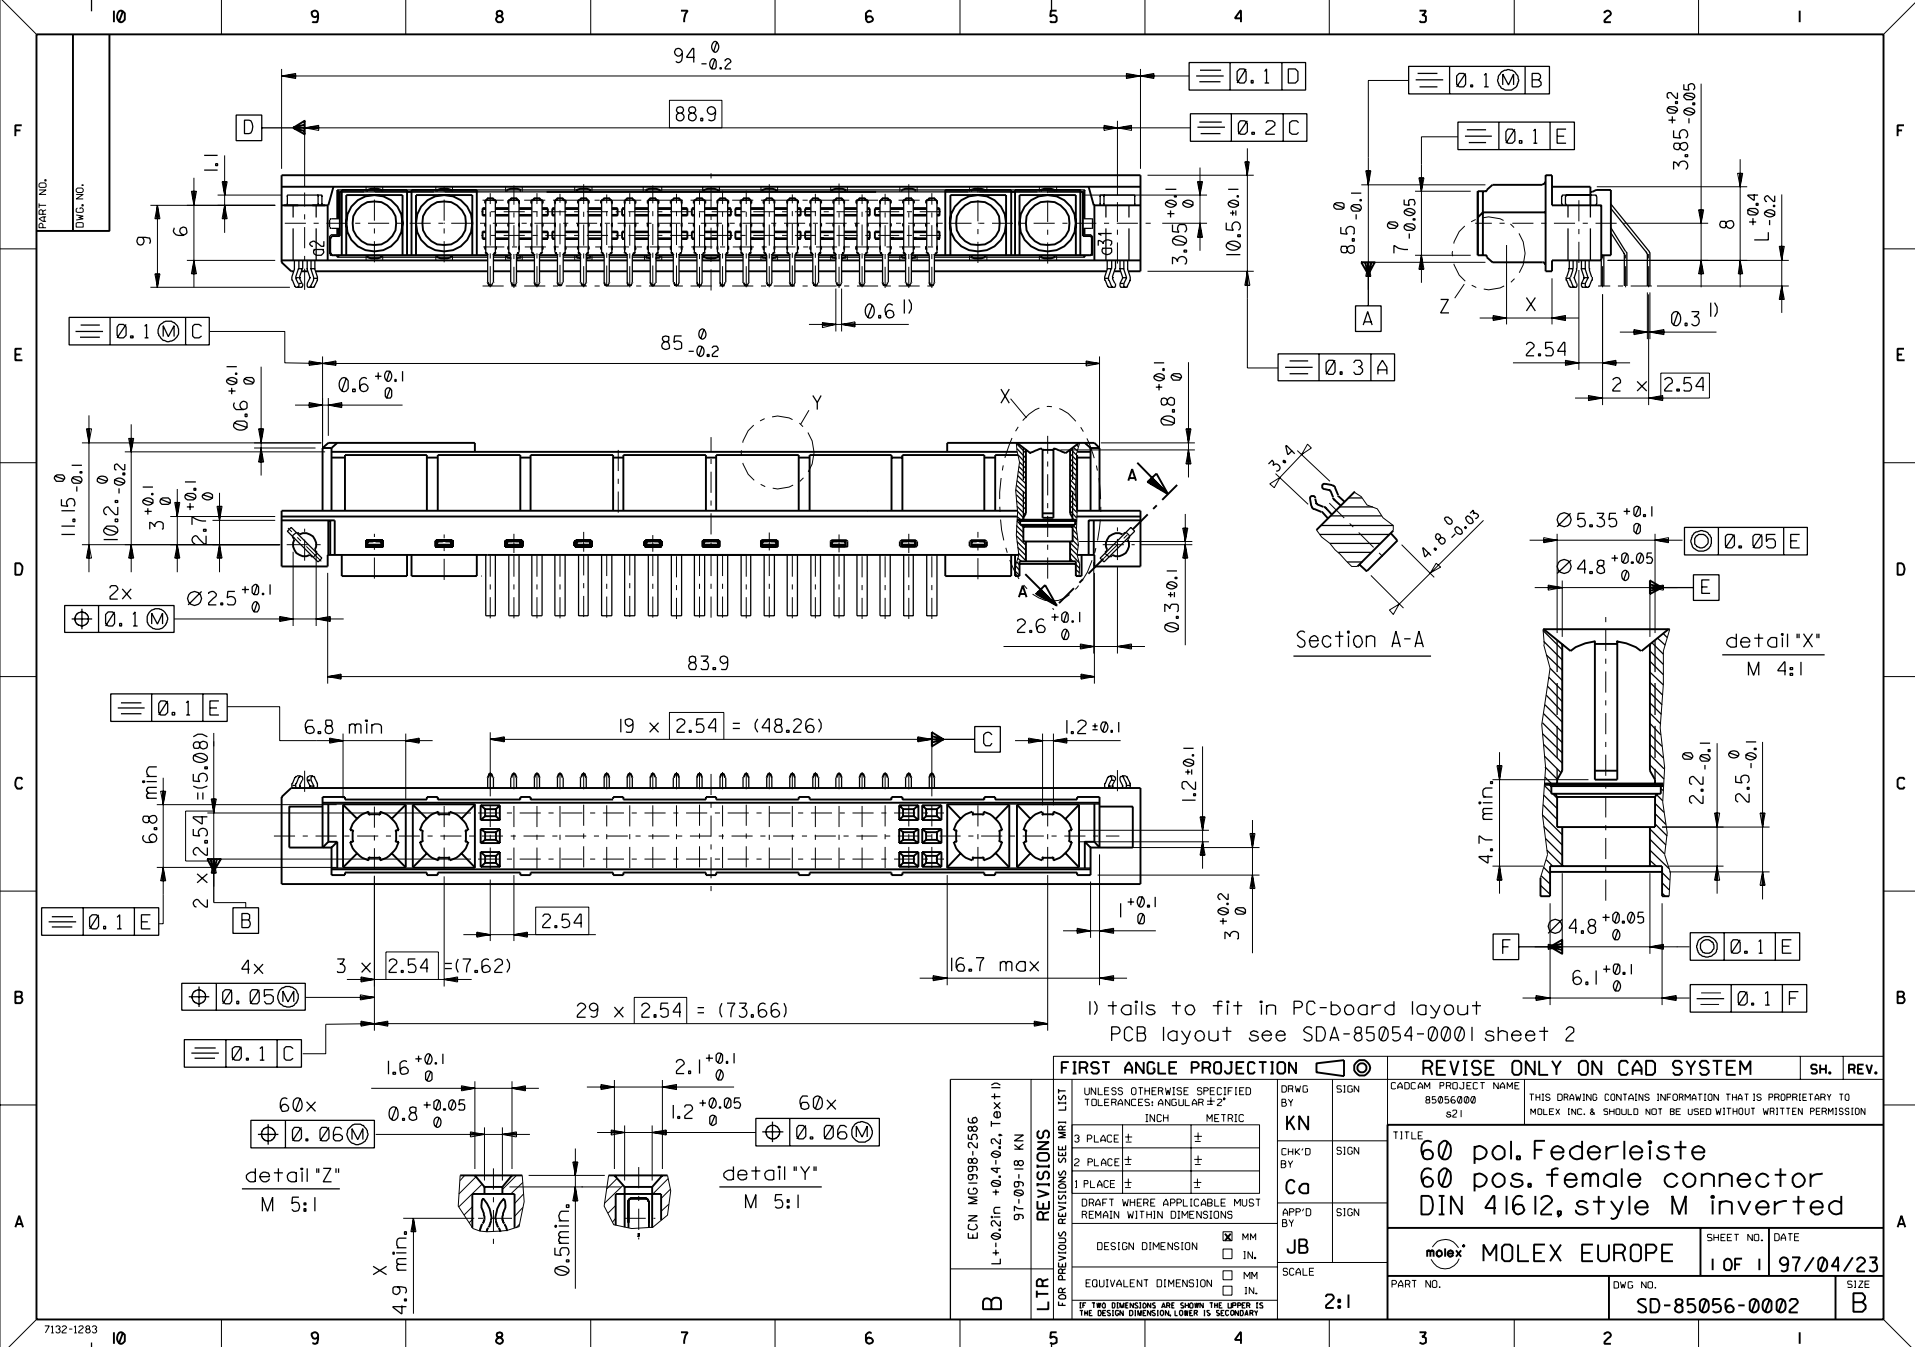

[illegible][illegible][illegible]

- | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|--|---|-------------------------|---|---|---|---|---|---|---|---------------------------|----------|-------------------|--|---|-------|-------------|------|------------|---|----------------|-------------------------|------------------|---|---------------|---------------------|---|-----------------------|------|---|---|---|---|---|---|---|---|---|---|---|
| VIEW ON MATING SIDE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| <table><tr><td>C</td><td>C</td><td>C</td><td>C</td><td>C</td><td>C</td><td>C</td><td>C</td><td>C</td><td>C</td></tr><tr><td>B</td><td>B</td><td>B</td><td>B</td><td>B</td><td>B</td><td>B</td><td>B</td><td>B</td><td>B</td></tr><tr><td>A</td><td>A</td><td>A</td><td>A</td><td>A</td><td>A</td><td>A</td><td>A</td><td>A</td><td>A</td></tr></table> | | | | | | | | | | C | C | C | C | C | C | C | C | C | C | B | B | B | B | B | B | B | B | B | B | A | A | A | A | A | A | A | A | A | A |
| C | C | C | C | C | C | C | C | C | C | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| B | B | B | B | B | B | B | B | B | B | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| A | A | A | A | A | A | A | A | A | A | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| S = 60 TOTAL NUMBER OF CONTACTS | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| <table><tr><td>Marking</td><td>Standard</td></tr><tr><td>Performance level</td><td>G2/0 = Contact area level2 / Termination tin</td></tr><tr><td>Flux proof</td><td>no</td></tr><tr><td>Fixing clip</td><td>no</td></tr><tr><td>Dimensions</td><td>SD-85056-0002 sht.1</td></tr><tr><td>TechnicalData</td><td>PS-85052-0001</td></tr></table> | | | | | | | | | | Marking | Standard | Performance level | G2/0 = Contact area level2 / Termination tin | Flux proof | no | Fixing clip | no | Dimensions | SD-85056-0002 sht.1 | TechnicalData | PS-85052-0001 | | | | | | | | | | | | | | | | | | |
| Marking | Standard | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Performance level | G2/0 = Contact area level2 / Termination tin | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Flux proof | no | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Fixing clip | no | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Dimensions | SD-85056-0002 sht.1 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| TechnicalData | PS-85052-0001 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| <table><tr><td>C</td><td>G2/0</td><td>c7-26</td></tr><tr><td>B</td><td>G2/0</td><td>b7-26</td></tr><tr><td>A</td><td>G2/0</td><td>a7-26</td></tr><tr><td>Contact symbol</td><td>Perform. level</td><td>Contact position number</td></tr></table> | | | | | | | | | | C | G2/0 | c7-26 | B | G2/0 | b7-26 | A | G2/0 | a7-26 | Contact symbol | Perform. level | Contact position number | | | | | | | | | | | | | | | | | | |
| C | G2/0 | c7-26 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| B | G2/0 | b7-26 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| A | G2/0 | a7-26 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Contact symbol | Perform. level | Contact position number | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| <table><tr><td colspan="2">REVISE ONLY ON CAD SYSTEM</td><td>SH. REV.</td></tr><tr><td>CAD/CAM PROJECT NAME</td><td colspan="2">THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INC. & SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION</td></tr><tr><td colspan="3">TITLE</td></tr><tr><td colspan="3">60 pos. female connector acc. DIN 41612, style M invert. contacts arrangement</td></tr><tr><td colspan="2">SHEET NO. 1 OF 1</td><td>DATE 97/05/21</td></tr><tr><td colspan="2">PART NO. 85056-0048</td><td>DWG NO. SD-85056-0048</td></tr><tr><td colspan="2">SIZE</td><td>A</td></tr></table> | | | | | | | | | | REVISE ONLY ON CAD SYSTEM | | SH. REV. | CAD/CAM PROJECT NAME | THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INC. & SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION | | TITLE | | | 60 pos. female connector acc. DIN 41612, style M invert. contacts arrangement | | | SHEET NO. 1 OF 1 | | DATE 97/05/21 | PART NO. 85056-0048 | | DWG NO. SD-85056-0048 | SIZE | | A | | | | | | | | | |
| REVISE ONLY ON CAD SYSTEM | | SH. REV. | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| CAD/CAM PROJECT NAME | THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INC. & SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| TITLE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 60 pos. female connector acc. DIN 41612, style M invert. contacts arrangement | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| SHEET NO. 1 OF 1 | | DATE 97/05/21 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| PART NO. 85056-0048 | | DWG NO. SD-85056-0048 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| SIZE | | A | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |

VIEW ON MATING SIDE																																							
<table><tr><td>C</td><td>C</td><td>C</td><td>C</td><td>C</td><td>C</td><td>C</td><td>C</td><td>C</td><td>C</td></tr><tr><td>B</td><td>B</td><td>B</td><td>B</td><td>B</td><td>B</td><td>B</td><td>B</td><td>B</td><td>B</td></tr><tr><td>A</td><td>A</td><td>A</td><td>A</td><td>A</td><td>A</td><td>A</td><td>A</td><td>A</td><td>A</td></tr></table>										C	C	C	C	C	C	C	C	C	C	B	B	B	B	B	B	B	B	B	B	A	A	A	A	A	A	A	A	A	A
C	C	C	C	C	C	C	C	C	C																														
B	B	B	B	B	B	B	B	B	B																														
A	A	A	A	A	A	A	A	A	A																														
S = 60 TOTAL NUMBER OF CONTACTS																																							
<table><tr><td>Marking</td><td>Standard</td></tr><tr><td>Performance level</td><td>G2/0 = Contact area level2 / Termination tin</td></tr><tr><td>Flux proof</td><td>no</td></tr><tr><td>Fixing clip</td><td>no</td></tr><tr><td>Dimensions</td><td>SD-85056-0002 sht.1</td></tr><tr><td>TechnicalData</td><td>PS-85052-0001</td></tr></table>										Marking	Standard	Performance level	G2/0 = Contact area level2 / Termination tin	Flux proof	no	Fixing clip	no	Dimensions	SD-85056-0002 sht.1	TechnicalData	PS-85052-0001																		
Marking	Standard																																						
Performance level	G2/0 = Contact area level2 / Termination tin																																						
Flux proof	no																																						
Fixing clip	no																																						
Dimensions	SD-85056-0002 sht.1																																						
TechnicalData	PS-85052-0001																																						
<table><tr><td>C</td><td>G2/0</td><td>c7-26</td></tr><tr><td>B</td><td>G2/0</td><td>b7-26</td></tr><tr><td>A</td><td>G2/0</td><td>a7-26</td></tr><tr><td>Contact symbol</td><td>Perform. level</td><td>Contact position number</td></tr></table>										C	G2/0	c7-26	B	G2/0	b7-26	A	G2/0	a7-26	Contact symbol	Perform. level	Contact position number																		
C	G2/0	c7-26																																					
B	G2/0	b7-26																																					
A	G2/0	a7-26																																					
Contact symbol	Perform. level	Contact position number																																					
<table><tr><td colspan="2">REVISE ONLY ON CAD SYSTEM</td><td>SH. REV.</td></tr><tr><td>CAD/CAM PROJECT NAME</td><td colspan="2">THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INC. & SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION</td></tr><tr><td colspan="3">TITLE</td></tr><tr><td colspan="3">60 pos. female connector acc. DIN 41612, style M invert. contacts arrangement</td></tr><tr><td colspan="2">SHEET NO. 1 OF 1</td><td>DATE 97/05/21</td></tr><tr><td colspan="2">PART NO. 85056-0048</td><td>DWG NO. SD-85056-0048</td></tr><tr><td colspan="2">SIZE</td><td>A</td></tr></table>										REVISE ONLY ON CAD SYSTEM		SH. REV.	CAD/CAM PROJECT NAME	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INC. & SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION		TITLE			60 pos. female connector acc. DIN 41612, style M invert. contacts arrangement			SHEET NO. 1 OF 1		DATE 97/05/21	PART NO. 85056-0048		DWG NO. SD-85056-0048	SIZE		A									
REVISE ONLY ON CAD SYSTEM		SH. REV.																																					
CAD/CAM PROJECT NAME	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INC. & SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION																																						
TITLE																																							
60 pos. female connector acc. DIN 41612, style M invert. contacts arrangement																																							
SHEET NO. 1 OF 1		DATE 97/05/21																																					
PART NO. 85056-0048		DWG NO. SD-85056-0048																																					
SIZE		A																																					

VIEW ON MATING SIDE																																							
<table><tr><td>C</td><td>C</td><td>C</td><td>C</td><td>C</td><td>C</td><td>C</td><td>C</td><td>C</td><td>C</td></tr><tr><td>B</td><td>B</td><td>B</td><td>B</td><td>B</td><td>B</td><td>B</td><td>B</td><td>B</td><td>B</td></tr><tr><td>A</td><td>A</td><td>A</td><td>A</td><td>A</td><td>A</td><td>A</td><td>A</td><td>A</td><td>A</td></tr></table>										C	C	C	C	C	C	C	C	C	C	B	B	B	B	B	B	B	B	B	B	A	A	A	A	A	A	A	A	A	A
C	C	C	C	C	C	C	C	C	C																														
B	B	B	B	B	B	B	B	B	B																														
A	A	A	A	A	A	A	A	A	A																														
S = 60 TOTAL NUMBER OF CONTACTS																																							
<table><tr><td>Marking</td><td>Standard</td></tr><tr><td>Performance level</td><td>G2/0 = Contact area level2 / Termination tin</td></tr><tr><td>Flux proof</td><td>no</td></tr><tr><td>Fixing clip</td><td>no</td></tr><tr><td>Dimensions</td><td>SD-85056-0002 sht.1</td></tr><tr><td>TechnicalData</td><td>PS-85052-0001</td></tr></table>										Marking	Standard	Performance level	G2/0 = Contact area level2 / Termination tin	Flux proof	no	Fixing clip	no	Dimensions	SD-85056-0002 sht.1	TechnicalData	PS-85052-0001																		
Marking	Standard																																						
Performance level	G2/0 = Contact area level2 / Termination tin																																						
Flux proof	no																																						
Fixing clip	no																																						
Dimensions	SD-85056-0002 sht.1																																						
TechnicalData	PS-85052-0001																																						
<table><tr><td>C</td><td>G2/0</td><td>c7-26</td></tr><tr><td>B</td><td>G2/0</td><td>b7-26</td></tr><tr><td>A</td><td>G2/0</td><td>a7-26</td></tr><tr><td>Contact symbol</td><td>Perform. level</td><td>Contact position number</td></tr></table>										C	G2/0	c7-26	B	G2/0	b7-26	A	G2/0	a7-26	Contact symbol	Perform. level	Contact position number																		
C	G2/0	c7-26																																					
B	G2/0	b7-26																																					
A	G2/0	a7-26																																					
Contact symbol	Perform. level	Contact position number																																					
<table><tr><td colspan="2">REVISE ONLY ON CAD SYSTEM</td><td>SH. REV.</td></tr><tr><td colspan="2">CAD/CAM PROJECT NAME</td><td>THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INC. & SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION</td></tr><tr><td colspan="3">TITLE</td></tr><tr><td colspan="3">60 pos. female connector acc. DIN 41612,style M invert. contacts arrangement</td></tr><tr><td colspan="2">SHEET NO. 1 OF 1</td><td>DATE 97/05/21</td></tr><tr><td colspan="2">PART NO. 85056-0048</td><td>DWG NO. SD-85056-0048</td></tr><tr><td colspan="2">SIZE</td><td>A</td></tr></table>										REVISE ONLY ON CAD SYSTEM		SH. REV.	CAD/CAM PROJECT NAME		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INC. & SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION	TITLE			60 pos. female connector acc. DIN 41612,style M invert. contacts arrangement			SHEET NO. 1 OF 1		DATE 97/05/21	PART NO. 85056-0048		DWG NO. SD-85056-0048	SIZE		A									
REVISE ONLY ON CAD SYSTEM		SH. REV.																																					
CAD/CAM PROJECT NAME		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INC. & SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION																																					
TITLE																																							
60 pos. female connector acc. DIN 41612,style M invert. contacts arrangement																																							
SHEET NO. 1 OF 1		DATE 97/05/21																																					
PART NO. 85056-0048		DWG NO. SD-85056-0048																																					
SIZE		A																																					

VIEW ON MATING SIDE																																							
<table><tr><td>C</td><td>C</td><td>C</td><td>C</td><td>C</td><td>C</td><td>C</td><td>C</td><td>C</td><td>C</td></tr><tr><td>B</td><td>B</td><td>B</td><td>B</td><td>B</td><td>B</td><td>B</td><td>B</td><td>B</td><td>B</td></tr><tr><td>A</td><td>A</td><td>A</td><td>A</td><td>A</td><td>A</td><td>A</td><td>A</td><td>A</td><td>A</td></tr></table>										C	C	C	C	C	C	C	C	C	C	B	B	B	B	B	B	B	B	B	B	A	A	A	A	A	A	A	A	A	A
C	C	C	C	C	C	C	C	C	C																														
B	B	B	B	B	B	B	B	B	B																														
A	A	A	A	A	A	A	A	A	A																														
S = 60 TOTAL NUMBER OF CONTACTS																																							
<table><tr><td>Marking</td><td>Standard</td></tr><tr><td>Performance level</td><td>G2/0 = Contact area level2 / Termination tin</td></tr><tr><td>Flux proof</td><td>no</td></tr><tr><td>Fixing clip</td><td>no</td></tr><tr><td>Dimensions</td><td>SD-85056-0002 sht.1</td></tr><tr><td>TechnicalData</td><td>PS-85052-0001</td></tr></table>										Marking	Standard	Performance level	G2/0 = Contact area level2 / Termination tin	Flux proof	no	Fixing clip	no	Dimensions	SD-85056-0002 sht.1	TechnicalData	PS-85052-0001																		
Marking	Standard																																						
Performance level	G2/0 = Contact area level2 / Termination tin																																						
Flux proof	no																																						
Fixing clip	no																																						
Dimensions	SD-85056-0002 sht.1																																						
TechnicalData	PS-85052-0001																																						
<table><tr><td>C</td><td>G2/0</td><td>c7-26</td></tr><tr><td>B</td><td>G2/0</td><td>b7-26</td></tr><tr><td>A</td><td>G2/0</td><td>a7-26</td></tr><tr><td>Contact symbol</td><td>Perform. level</td><td>Contact position number</td></tr></table>										C	G2/0	c7-26	B	G2/0	b7-26	A	G2/0	a7-26	Contact symbol	Perform. level	Contact position number																		
C	G2/0	c7-26																																					
B	G2/0	b7-26																																					
A	G2/0	a7-26																																					
Contact symbol	Perform. level	Contact position number																																					
<table><tr><td colspan="2">REVISE ONLY ON CAD SYSTEM</td><td>SH. REV.</td></tr><tr><td colspan="2">CAD/CAM PROJECT NAME</td><td>THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INC. & SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION</td></tr><tr><td colspan="3">TITLE</td></tr><tr><td colspan="3">60 pos. female connector acc. DIN 41612,style M invert. contacts arrangement</td></tr><tr><td colspan="2">SHEET NO. 1 OF 1</td><td>DATE 97/05/21</td></tr><tr><td colspan="2">PART NO. 85056-0048</td><td>DWG NO. SD-85056-0048</td></tr><tr><td colspan="2">SIZE</td><td>A</td></tr></table>										REVISE ONLY ON CAD SYSTEM		SH. REV.	CAD/CAM PROJECT NAME		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INC. & SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION	TITLE			60 pos. female connector acc. DIN 41612,style M invert. contacts arrangement			SHEET NO. 1 OF 1		DATE 97/05/21	PART NO. 85056-0048		DWG NO. SD-85056-0048	SIZE		A									
REVISE ONLY ON CAD SYSTEM		SH. REV.																																					
CAD/CAM PROJECT NAME		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INC. & SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION																																					
TITLE																																							
60 pos. female connector acc. DIN 41612,style M invert. contacts arrangement																																							
SHEET NO. 1 OF 1		DATE 97/05/21																																					
PART NO. 85056-0048		DWG NO. SD-85056-0048																																					
SIZE		A																																					

VIEW ON MATING SIDE																																							
<table><tr><td>C</td><td>C</td><td>C</td><td>C</td><td>C</td><td>C</td><td>C</td><td>C</td><td>C</td><td>C</td></tr><tr><td>B</td><td>B</td><td>B</td><td>B</td><td>B</td><td>B</td><td>B</td><td>B</td><td>B</td><td>B</td></tr><tr><td>A</td><td>A</td><td>A</td><td>A</td><td>A</td><td>A</td><td>A</td><td>A</td><td>A</td><td>A</td></tr></table>										C	C	C	C	C	C	C	C	C	C	B	B	B	B	B	B	B	B	B	B	A	A	A	A	A	A	A	A	A	A
C	C	C	C	C	C	C	C	C	C																														
B	B	B	B	B	B	B	B	B	B																														
A	A	A	A	A	A	A	A	A	A																														
S = 60 TOTAL NUMBER OF CONTACTS																																							
<table><tr><td>Marking</td><td>Standard</td></tr><tr><td>Performance level</td><td>G2/0 = Contact area level2 / Termination tin</td></tr><tr><td>Flux proof</td><td>no</td></tr><tr><td>Fixing clip</td><td>no</td></tr><tr><td>Dimensions</td><td>SD-85056-0002 sht.1</td></tr><tr><td>TechnicalData</td><td>PS-85052-0001</td></tr></table>										Marking	Standard	Performance level	G2/0 = Contact area level2 / Termination tin	Flux proof	no	Fixing clip	no	Dimensions	SD-85056-0002 sht.1	TechnicalData	PS-85052-0001																		
Marking	Standard																																						
Performance level	G2/0 = Contact area level2 / Termination tin																																						
Flux proof	no																																						
Fixing clip	no																																						
Dimensions	SD-85056-0002 sht.1																																						
TechnicalData	PS-85052-0001																																						
<table><tr><td>C</td><td>G2/0</td><td>c7-26</td></tr><tr><td>B</td><td>G2/0</td><td>b7-26</td></tr><tr><td>A</td><td>G2/0</td><td>a7-26</td></tr><tr><td>Contact symbol</td><td>Perform. level</td><td>Contact position number</td></tr></table>										C	G2/0	c7-26	B	G2/0	b7-26	A	G2/0	a7-26	Contact symbol	Perform. level	Contact position number																		
C	G2/0	c7-26																																					
B	G2/0	b7-26																																					
A	G2/0	a7-26																																					
Contact symbol	Perform. level	Contact position number																																					
<table><tr><td colspan="2">REVISE ONLY ON CAD SYSTEM</td><td>SH. REV.</td></tr><tr><td colspan="2">CAD/CAM PROJECT NAME</td><td>THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INC. & SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION</td></tr><tr><td colspan="3">TITLE</td></tr><tr><td colspan="3">60 pos. female connector acc. DIN 41612,style M invert. contacts arrangement</td></tr><tr><td colspan="2">SHEET NO. 1 OF 1</td><td>DATE 97/05/21</td></tr><tr><td colspan="2">PART NO. 85056-0048</td><td>DWG NO. SD-85056-0048</td></tr><tr><td colspan="2">SIZE</td><td>A</td></tr></table>										REVISE ONLY ON CAD SYSTEM		SH. REV.	CAD/CAM PROJECT NAME		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INC. & SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION	TITLE			60 pos. female connector acc. DIN 41612,style M invert. contacts arrangement			SHEET NO. 1 OF 1		DATE 97/05/21	PART NO. 85056-0048		DWG NO. SD-85056-0048	SIZE		A									
REVISE ONLY ON CAD SYSTEM		SH. REV.																																					
CAD/CAM PROJECT NAME		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INC. & SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION																																					
TITLE																																							
60 pos. female connector acc. DIN 41612,style M invert. contacts arrangement																																							
SHEET NO. 1 OF 1		DATE 97/05/21																																					
PART NO. 85056-0048		DWG NO. SD-85056-0048																																					
SIZE		A																																					



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.