

Description

Very cost effective design to meet international requirements. No exposed metal parts which are, or could become, current-carrying except for terminals. R-type TO CBE to EN 60934.

- Manual reset, cycling trip free mechanism
- Extremely small and lightweight
- UL, CSA, VDE and EN 60934 (IEC 60934) approved

Typical applications

Battery chargers, consumer products, power supplies, motors.

Ordering information

Type No.

1658 single pole thermal circuit breaker

Threadneck design

G21 manual reset type, 3/8"-27 threadneck

A00 auto reset type, without threadneck

Hardware

00 no hardware

01 one PAL nut, bulk

02 one PAL nut, one knurled nut, bulk

Terminals

P10 blade terminals A6.3-0.8 (QC .250)

P13 blade terminals A6.3-0.8 (QC .250), 90°

Current ratings

5 ...30 A

1658 - G21 - 02 - P10 - 5 A Ordering example

* Screws and lock washers bulk shipped

Preferred types



Preferred types	Standard current ratings (A)											
	5	6	7	8	9	10	12	15	16	20	25	30
1658-G21-02-P10-	x	x	x	x	x	x	x	x	x	x	x	x
1658-G21-02-P13-	x	x	x	x	x	x	x	x	x			
1658-A00-00-P10-	x	x	x	x	x	x	x	x	x			

Standard current ratings and typical voltage drop values

Current rating (A)	voltage drop values (mV)	Current rating (A)	voltage drop values (mV)
5	≤ 250	12	≤ 250
6	≤ 250	15	≤ 250
7	≤ 250	16	≤ 250
8	≤ 250	20	≤ 250
9	≤ 250	25	≤ 250
10	≤ 250	30	≤ 250



1658-...

2

Technical data

For further details please see chapter: Technical Information

Voltage rating AC 240 V; DC 28 V

Current ratings 5...30 A

Typical life

AC + DC	5...16 A	1,000 operations at $2 \times I_N$, inductive
	17...25 A	1,000 operations at $2 \times I_N$, resistive

Behaviour at rated switching capacity
(EN 60934;
test sequence D)

operat.	I_N	U_N	
40	5...16 A	AC 240 V	6 $\times I_N$ ind
40	5...16 A	DC 28 V	4 $\times I_N$ ind
40	17...25 A	AC 240 V	120 A resistive
40	17...25 A	DC 28 V	120 A resistive

Ambient temperature -20...+60 °C (-4...+140 °F),
 ≤ 7 A max. +40 °C (+104 °F)

Insulation co-ordination (IEC 60664 and 60664 A) rated impulse withstand voltage 2.5 kV pollution degree 2 reinforced insulation in operating area

Dielectric strength (IEC 60664 and 60664A) test voltage operating area AC 3,000 V

Insulation resistance > 100 MΩ (DC 500 V)

Interrupting capacity I_{cn} 5...7 A 180 A
8...30 A 200 A

Interrupting capacity I_{cn} (UL 1077/EN 60934 PC1) I_N U_N
5...16 A AC 240 V 2,000 A
5...30 A AC 120 V 2,000 A
5...30 A DC 32 V 2,500 A
5...30 A DC 28 V 2,000 A (1658-A..)

Degree of protection (IEC 60529/DIN 40050) operating area IP40
terminal area IP00

Vibration 8 g (57-500 Hz) ± 0.61 mm (10-57 Hz),
to IEC 60068-2-6, test Fc,
10 frequency cycles/axis


Shock 30 g (11 ms)
to IEC 60068-2-27, test Ea

Corrosion 96 hours at 5 % salt mist,
to IEC 60068-2-11, test Ka

Humidity 240 hours at 95 % RH
to IEC 60068-2-78, test Cab

Mass approx. 16 g


Dimensions

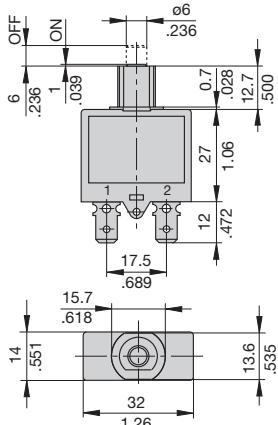

A00




G21 tightening torque max. 0.8 Nm




See ordering information for mounting hardware.

Terminal design

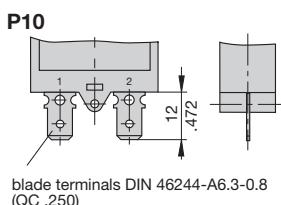


P13

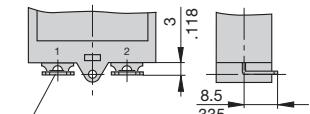


blade terminals DIN 46244-A6.3-0.8 (QC .250)
angled 90°


Installation drawing

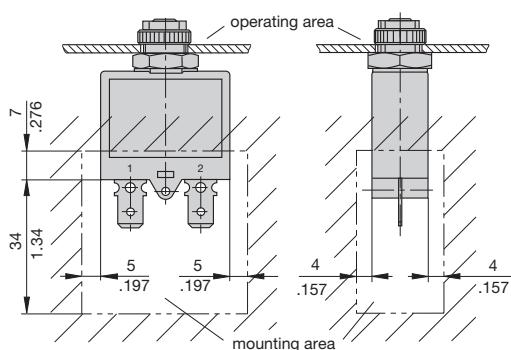

Internal connection diagram



Typical time/current characteristics

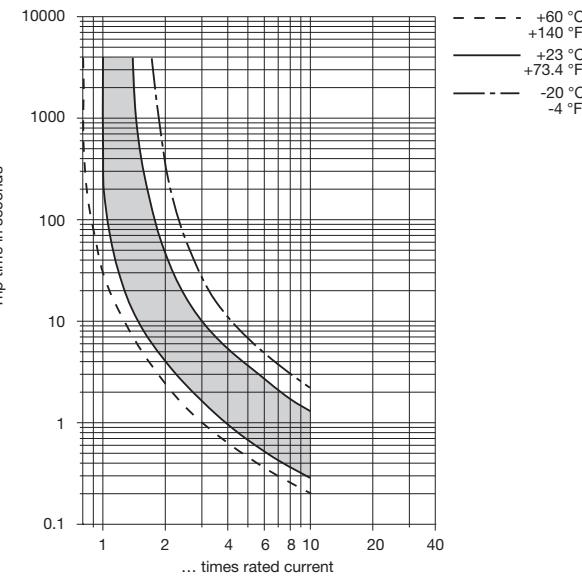


The time/current characteristic curve depends on the ambient temperature prevailing. In order to eliminate nuisance tripping, please multiply the circuit breaker current ratings by the derating factor shown below. See also section Technical information.

Ambient temp. °F	-4	+14	+32	+73.4	+104	+122	+140
Ambient temp. °C	-20	-10	0	+23	+40	+50	+60
Derating factor $I_N > 7A$	0.83	0.85	0.9	1	1.1	1.18	1.25
$I_N < 7A$	0.74	0.76	0.82	1	1.23	-	-


This is a metric design and millimeter dimensions take precedence ($\frac{\text{mm}}{\text{inch}}$)

Accessories


Mounting nut 3/8", 27-thread
Y 306 671 01

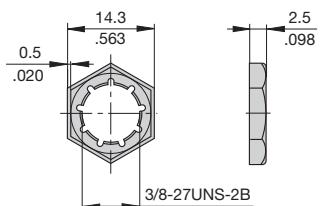


Knurled nut 3/8", 27-thread
plastic (standard)
Y 307 117 02

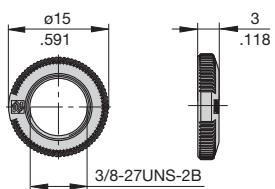


Knurled nut 3/8", 27-thread
nickel-plated brass
Y 300 190 03

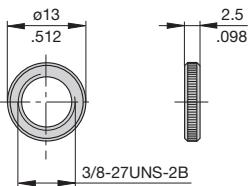


Hex nut 3/8", 27-thread
nickel-plated brass
Y 300 192 01

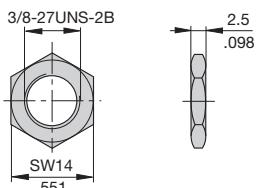

Press to Reset Plate for 3/8"
thread, aluminium
Y 301 059 02

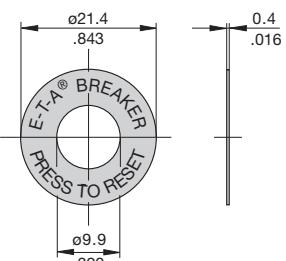


Reset button seal for 3/8", 27-thread,
short
long
X 201 285 01
X 200 799 01

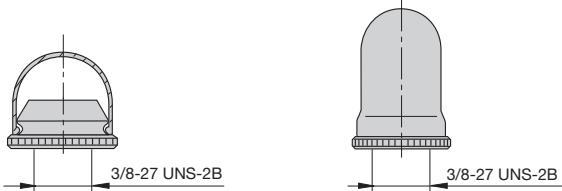

Panel cut out

1658-3/8-27 UNS-2A



Approvals

Authority	Voltage ratings	Current ratings
VDE (EN 60934)	AC 240 V; DC 28 V	5...25 A
UL	AC 240 V AC 120 V AC 120 V DC 32 V DC 28 V	5...16 A 1658-G.. 18...30 A 1658-G.. 5...30 A 1658-A.. 5...30 A 1658-G.. 5...30 A 1658-A..

This is a metric design and millimeter dimensions take precedence ($\frac{\text{mm}}{\text{inch}}$)

All dimensions without tolerances are for reference only. In the interest of improved design, performance and cost effectiveness the right to make changes in these specifications without notice is reserved. Product markings may not be exactly as the ordering codes. Errors and omissions excepted.



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помошь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помошь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.