


To _____

No. A236-040403N-01

Date 3rd Apr. '04



Data Sheet

DCS1800 Rx SAW Filter	
Application	: Rx Filter for DCS1800
Center Frequency	: 1842.5MHz
Size	: 2.0x1.4mm, 5pin-layout
Impedance	: 50-150ohms unbalance-balance
Part No.	: EFCH1842TCA7

Issued S. Suzuki
Check K. Nishimura

CIRCUIT COMPONENTS BUSINESS UNIT
MATSUSHITA ELECTRONIC COMPONENTS CO.,LTD
KADOMA, OSAKA, JAPAN

DCS1800 Rx SAW Filter

----- Unbalanced input and balanced output -----

Part No. :

Design No. : T1842TMD

Parameter		Frequency	Your request			Our preliminary spec.			Unit
			Min.	Typ.	Max.	Min.	Typ.	Max.	
Passband			1805 ... 1880			1805 ... 1880			MHz
Insertion loss		1805 ... 1880MHz					1.7	2.4	dB
Ripple in passband		1805 ... 1880MHz					0.5	1.5	dB
Amplitude imbalance		1805 ... 1880MHz				-1.5	-0.6 +0.6	+1.5	dB
Phase imbalance		1805 ... 1880MHz				-10	-2 +0	+10	deg.
Attenuation	Att1	DC ... 1705MHz				30	38		dB
	Att2	1705 ... 1785MHz (T=+15 ... +60 deg.C)				12	15		dB
		1705 ... 1785MHz (T=-10 ... +80 deg.C)				10			dB
	Att3	1920 ... 1980MHz				12	18		dB
	Att4	1980 ... 2500MHz				20	25		dB
	Att5	2500 ... 3840MHz				25	30		dB
	Att6	3840 ... 6000MHz				20	40		dB
VSWR	Input	1805 ... 1880MHz					2.3	2.7	
	Output	1805 ... 1880MHz					2.1	2.4	
Input impedance (Single Ended)						50			Ohm
Output impedance (Differential)						150 // 22 nH			Ohm
Maximum drive level								13	dBm
Operating temperature						-10		+80	deg. C
Storage temperature						-40		+85	deg. C

DCS1800 Rx SAW Filter


----- Unbalanced input and balanced output -----

Part No. :


Design No. : T1842TMD

Jig Loss = 0.3dB

▶Tr1 Sds21 Log Mag 10.00dB/ Ref 0.000dB [F4]
Tr2 Sds21 Log Mag 1.000dB/ Ref -300.0m dB [F4]

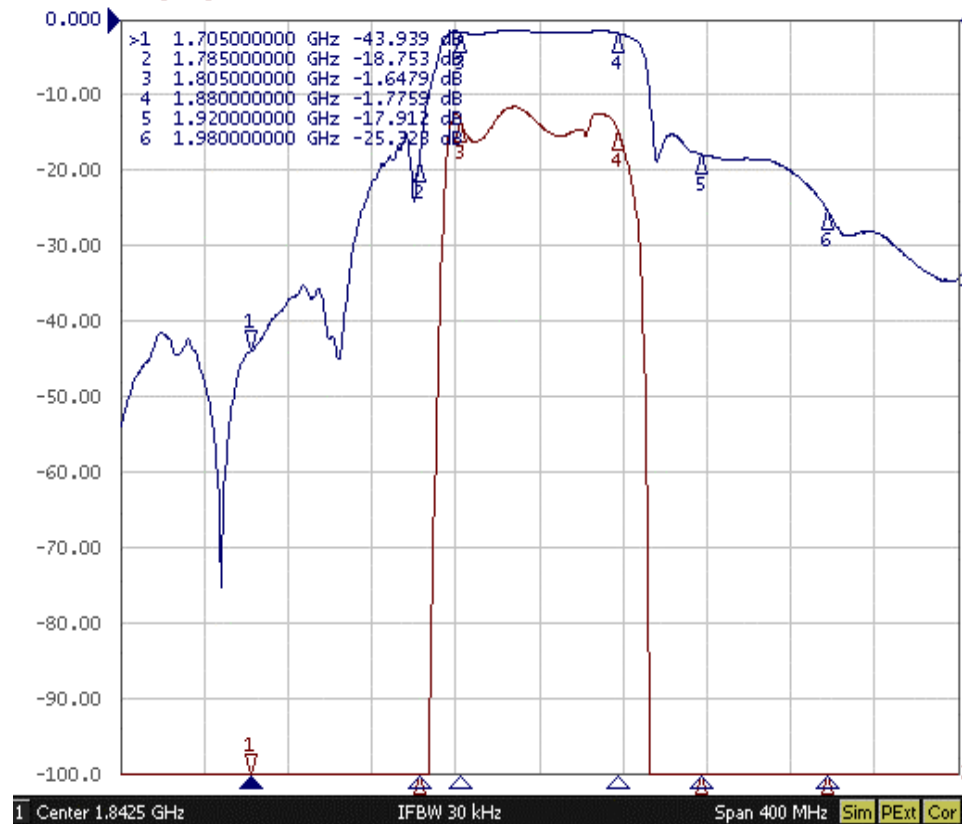

▶Tr1 Sds21 Log Mag 10.00dB/ Ref 0.000dB [F4]

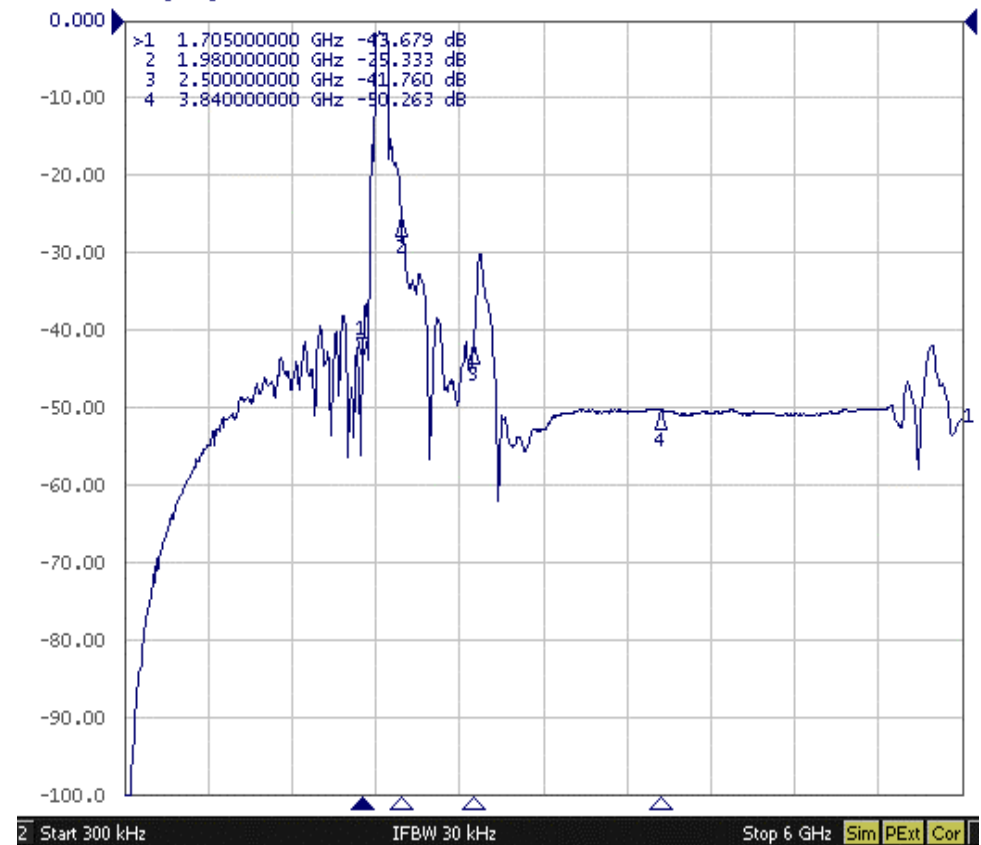


DCS1800 Rx SAW Filter

----- Unbalanced input and balanced output -----

Part No. :

Design No. : T1842TMD

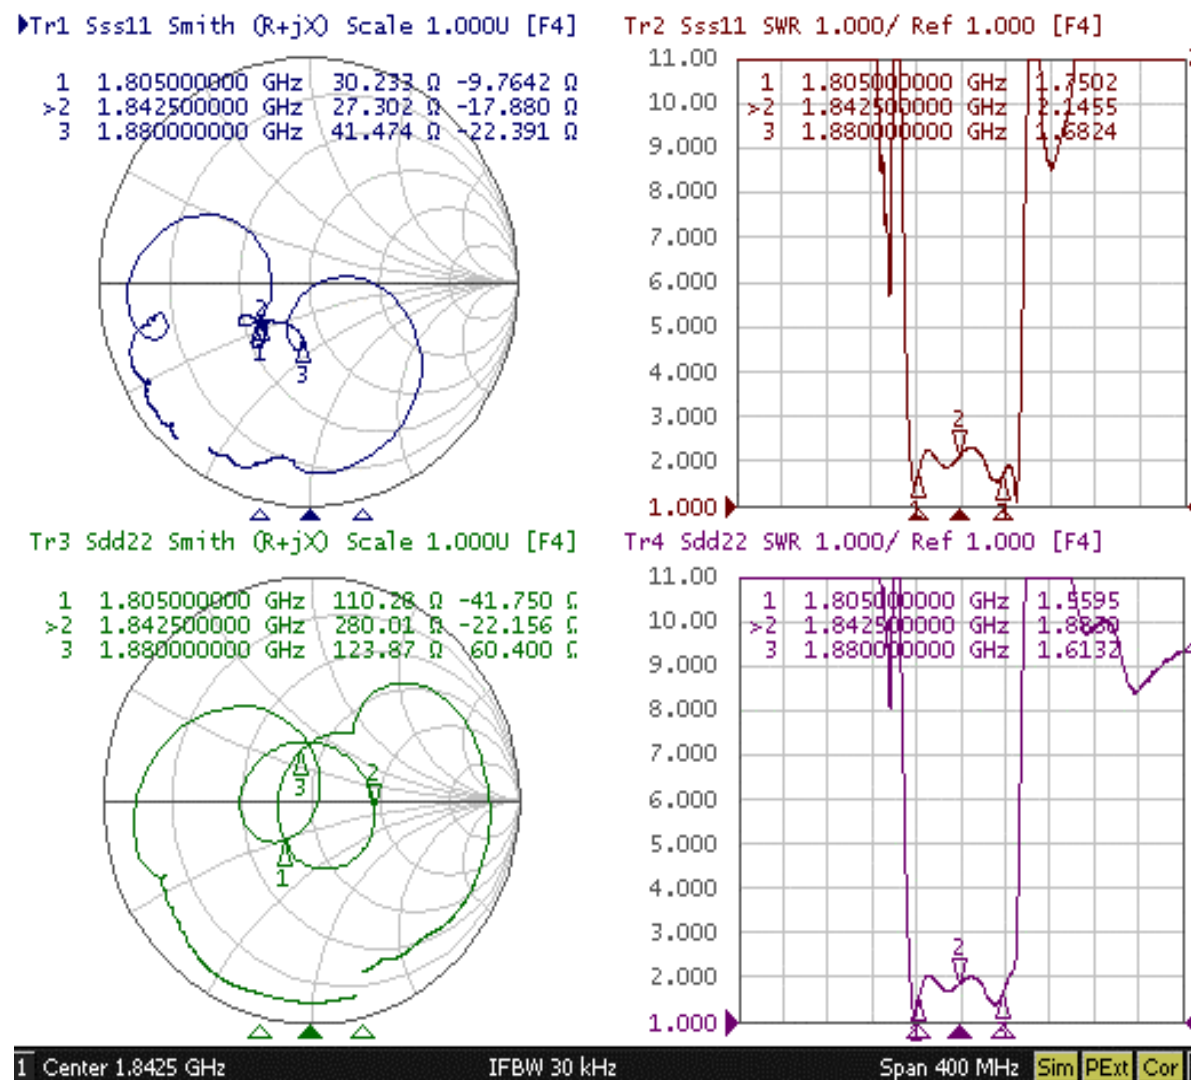


DCS1800 Rx SAW Filter

----- Unbalanced input and balanced output -----




Part No. :

Design No. : T1842TMD

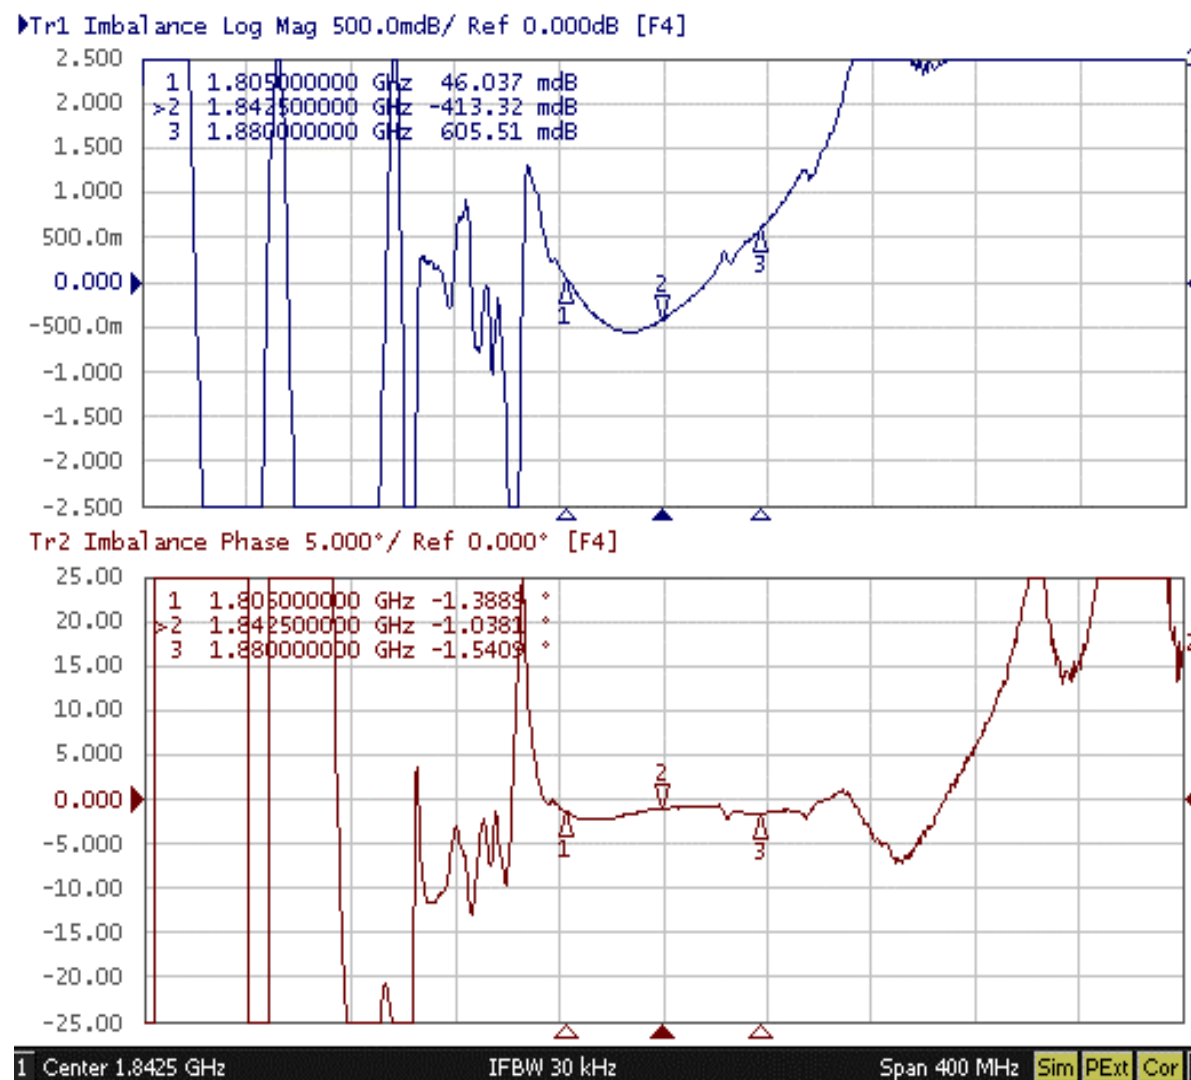

THIRD ANGLE PROJECTION

Tolerance : +/-0.05

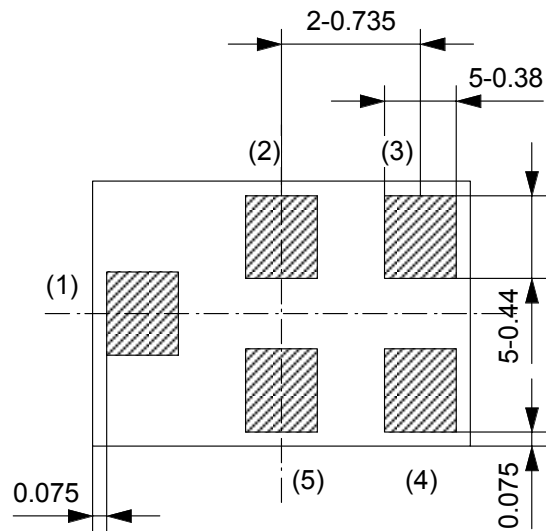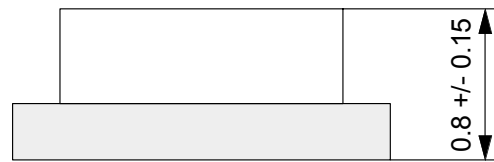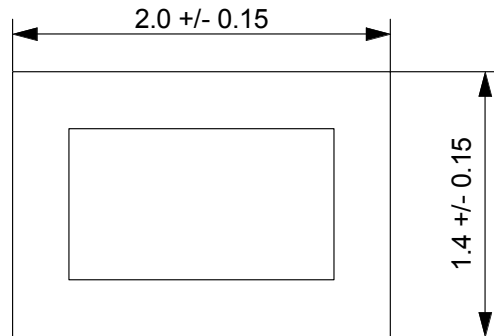

- (1) Input
- (2) GND
- (3) Output
- (4) Output
- (5) GND

Note :
The design manufacturing process,
and Specification of this device
are subject to change without
notice.

DO NOT SCALE DRAWING

REVISIONS INDICATED BY Δ

ALL DIMENSIONS ARE IN MILLIMETERS

UNLESS OTHERWISE SPECIFIED

BASIC DIMENSIONS		TOLERANCE
UP TO	INCL	
TO	INCL	
TO	INCL	
TO	INCL	
ABOVE		

ISSUE	REVISIONS	DATE
MATERIAL	FINISH	SCALE
DESIGN		
DRAW		
CHECK		
APPROVAL		
DRAWING NO.		
TYPE NO.		


NAME _____

SAW Filter

TYPE NO.

**CERAMIC BUSINESS UNIT, LCR DEVICE COMPANY
MATSUSHITA ELECTRONIC COMPONENTS CO.,LTD.
KADOMA, OSAKA, JAPAN**

Measurement Circuit

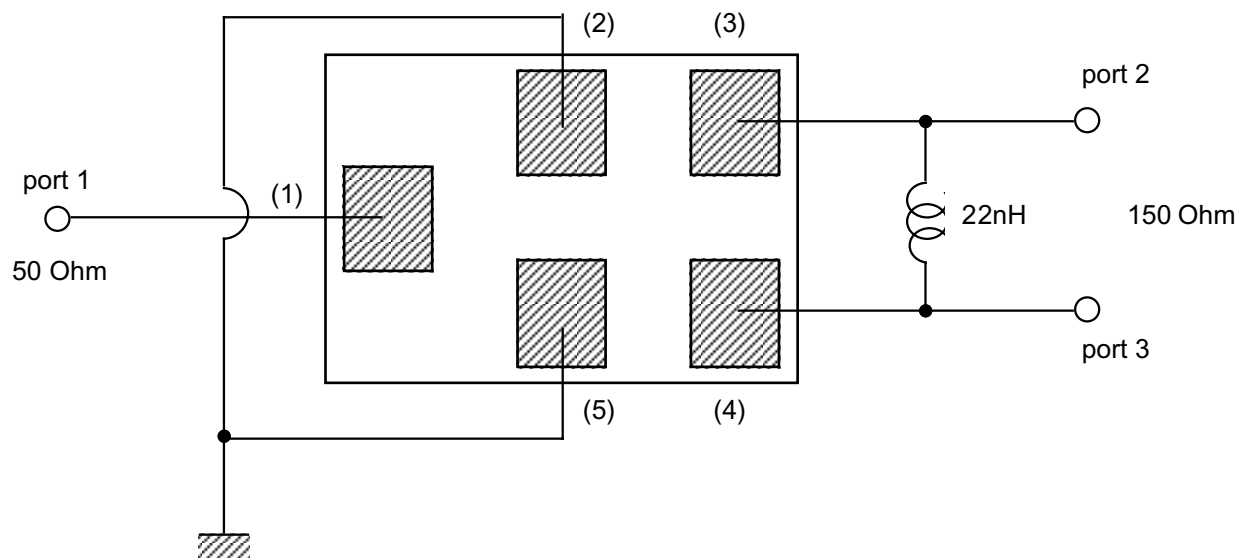

Input impedance : 50 Ohm (Single ended)
Output impedance : 150 Ohm (Differential)

Fig. 2


UNLESS OTHERWISE SPECIFIED		
BASIC DIMENSIONS		TOLERANCE
UP TO	INCL	
	TO INCL	
	TO INCL	
	TO INCL	
ABOVE		

[illegible]

**CERAMIC BUSINESS UNIT, LCR DEVICE COMPANY
MATSUSHITA ELECTRONIC COMPONENTS CO.,LTD.
KADOMA, OSAKA, JAPAN**

THIRD ANGLE PROJECTION

Recommended land pattern

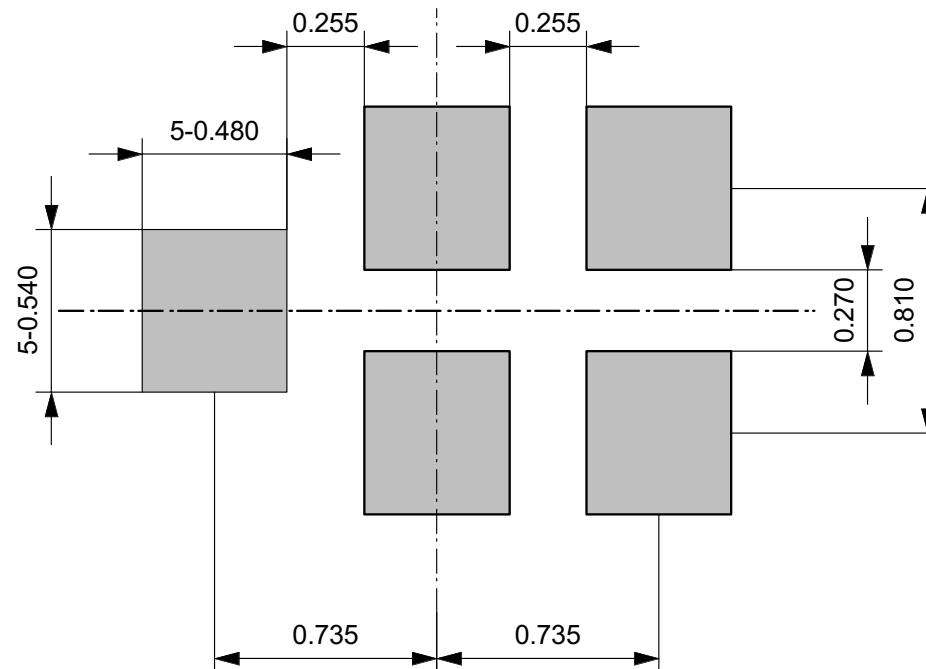

Note :
The design manufacturing process, and Specification of this device are subject to change without notice.

UNLESS OTHERWISE SPECIFIED

BASIC DIMENSIONS		TOLERANCE
UP TO	INCL	
TO	INCL	
TO	INCL	
TO	INCL	
ABOVE		

ISSUE	REVISIONS	DATE
MATERIAL	FINISH	SCALE
DESIGN		
DRAW		
CHECK		
APPROVAL		
DRAWING NO.		
NAME		TYPE NO.

SAW Filter

CERAMIC BUSINESS UNIT, LCR DEVICE COMPANY
MATSUSHITA ELECTRONIC COMPONENTS CO.,LTD.
KADOMA, OSAKA, JAPAN

DO NOT SCALE DRAWING

REVISIONS INDICATED BY Δ

ALL DIMENSIONS ARE IN MILLIMETERS



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.