


## PRODUCT BRIEF

Intel® Ethernet Server  
Adapter X520-DA1/X520-DA2  
for Open Compute Project (OCP)  
Network Connectivity

# Intel® Ethernet Server Adapter X520-DA1/X520-DA2 for Open Compute Project (OCP)

10 gigabit Ethernet server adapters provide ultimate flexibility and scalability for cloud deployments

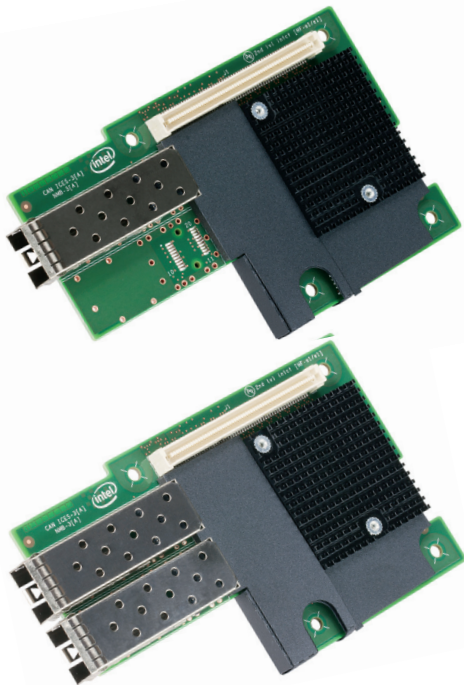

## Overview

The best-selling Intel® Ethernet Converged Network Adapter X520 Series is known for its high performance, low latency, reliability, and flexibility. The addition of the Intel® Ethernet Server Adapter X520 Series for Open Compute Project (OCP) to the family delivers the X520 capabilities in an Open Compute Project (OCP) form factor.

The Intel® Ethernet Server Adapter X520 Series for Open Compute Project (OCP) delivers a proven, reliable solution for deployments of Ethernet for high bandwidth, low cost, 10GbE network connections. Increased I/O performance with Intel® Data Direct I/O Technology (Intel® DDIO) and support for intelligent offloads make this adapter a perfect match for scaling performance on Intel® Xeon® processor E5/E7 based servers.

Powered by the Intel® 82599 10 Gigabit Ethernet Controller, the Intel® Ethernet Server Adapter X520 Series for OCP addresses the demanding needs of the next-generation data center by providing unmatched features for virtualization and proven, reliable performance. The Intel® 82599 10 Gigabit Ethernet Controller is the industry standard for 10 GbE, making it the most popular 10GbE controller on the market today.

The Open Compute Project (OCP) is a Facebook\* initiative to openly share custom data center designs to improve both cost and energy efficiency across the industry. The OCP uses a minimalist approach to

system design thereby reducing complexity and cost, allowing data centers to scale out more effectively. By publishing the designs and specifications of this low-power, low-cost hardware, it can reduce the cost of infrastructure for businesses large and small.

## Optimized for Multi-core Processor Servers

### Intel® Ethernet Flow Director

Today's data centers depend on the multiprocessing, high performance capability of servers to increase system throughput, responsiveness, and reliability through the introduction of additional hardware threads, CPUs, or cores. But in a multiprocessing environment, it is essential to ensure a coordinated affinity of protocol processing and network applications on the same target cores. This affinity significantly reduces contention for shared resources, minimizes software synchronization overheads between cores, and enhances cache efficiency.

Receive Side Scaling (RSS) resolves the single-processor bottleneck by enabling the receive side network load from a network adapter to be shared across multiple cores. RSS enables packet receive-processing to scale with the number of available cores. However, RSS has a limitation. It cannot steer an incoming network flow to the same core where the application process resides. RSS does not maintain the Traffic Flow > Core (Application) relationship. If an application is running on one core, while RSS has scheduled receive

traffic to be on another core, poor cache efficiency and significant core-to-core synchronization overheads will result. The overall system performance can be significantly degraded.

The Intel® Ethernet Flow Director and the Application Target Routing (ATR) service found in Intel's Ethernet controllers, is an advanced network offload technology that provides the benefits of parallel receive processing in multiprocessing environments that automatically steer incoming network data to the same core on which its application process resides. Intel Ethernet Flow Director and ATR preserve the Traffic Flow>Core (Application) relationship. As a result, Intel Ethernet Flow Director and ATR can significantly lower latency and improve CPU usage.

Intel Ethernet Flow Director enables administrators to define "signature filters" and the ATR service on the Intel Ethernet controller uses these filters to ensure that all packets in a TCP flow are processed by a single core. This intelligent offload capability supports advanced filters that direct receive packets by their flows to different queues and enables tight control on routing a flow in the platform. It matches

flows and CPU cores for flow affinity and supports multiple parameters for flexible flow classification and load balancing.

### **Best Choice for Virtualization**

Intel leads the industry in virtualization by being the first to provide virtualization for all the major operating systems and working with the OEMs to implement virtualization not only on the adapter but also on the platform.

### **Intel® Virtualization Technology for connectivity (Intel® VT-c)**

Intel® Ethernet Controllers includes Intel® Virtualization Technology for connectivity (Intel VT-c) to deliver virtualized I/O performance optimizations and Quality of Service (QoS) features designed directly in to the controller's silicon. Working in conjunction with virtualization optimized drivers, PCI-SIG\* Single Root I/O Virtualization and Sharing (SR-IOV) can be used to help reduce I/O bottlenecks, and improve the overall server performance.

### **Hypervisor BYPASS using SR-IOV**

Bypassing the hypervisor and allowing direct hardware access by virtual machines, reduces CPU overhead, reduces latency, and increases network throughput. Most of the current hypervisor releases have been enabled to partition a single physical Ethernet controller into multiple virtual Ethernet controllers that can be used directly by VMs by taking advantage the PCI-SIG\* SR-IOV standard. The use of these virtual controllers, known as Virtual Functions (VF), enables additional QoS features in the controller's silicon to manage and direct traffic such as traffic isolation, port partitioning with bandwidth allocation and on-chip VF-VF switching.

Features	Benefits
<b>GENERAL</b>	
Intel® 82599 10 Gigabit Ethernet Controller	Industry-leading, energy-efficient design for next-generation 10 Gigabit performance and multi-core processors.
SFP+ Connectivity	Intel® Ethernet Server Adapter X520 Series for OCP with SFP+ connections support 10GBASE-SR, 10GBASE-LR and SFP+ Copper Direct Attach physical media.
OCP Form Factor	<ul style="list-style-type: none"> <li>Supports the OCP form factor for Server specifications revision 2</li> </ul>
iSCSI Remote Boot v3.0	<ul style="list-style-type: none"> <li>Enables system boot-up via iSCSI</li> <li>Provides additional network management capability</li> </ul>
RoHS-compliant	<ul style="list-style-type: none"> <li>Complies with the European Union directive 2002/95/EC to reduce the use of hazardous materials</li> </ul>
Time Sync (IEEE 1588*, 802.1as)	<ul style="list-style-type: none"> <li>Enables networked Ethernet equipment to synchronize internal clocks according to a network master clock; endpoint can then acquire an accurate estimate of the master time by compensating for link latency.</li> </ul>
Low Halogen	<ul style="list-style-type: none"> <li>Leadership in an environmentally friendly ecosystem</li> </ul>
SMBus or NC-SI enabled	<ul style="list-style-type: none"> <li>Provides out of band (OOB) network access</li> </ul>
<b>I/O FEATURES FOR MULTI-CORE PROCESSOR SERVERS</b>	
Intel® Data Direct I/O (Intel® DDIO)	<ul style="list-style-type: none"> <li>Reduces memory accesses from I/O on local socket</li> <li>Speeds up CPU data transfer</li> <li>Accelerates inbound &amp; outbound data flows</li> </ul>
Intel® Ethernet Flow Director	<ul style="list-style-type: none"> <li>Intel Ethernet Flow Director and ATR can significantly lower latency and improve CPU utilization by preserving the affinity between the flow and the core where the application resides</li> </ul>
RSS - Receive Side Scaling	<ul style="list-style-type: none"> <li>Uses multiple queues for receive traffic</li> </ul>
MSI-X support	<ul style="list-style-type: none"> <li>Minimizes the overhead of interrupts</li> <li>Load-balancing of interrupt handling between multiple cores/CPU's</li> </ul>
Low Latency Interrupts (LLI)	<ul style="list-style-type: none"> <li>Based on the sensitivity of the incoming data, the adapter can bypass the automatic moderation of time intervals between the interrupts</li> </ul>
Multiple Queues: 128 Tx and Rx queues per port	<ul style="list-style-type: none"> <li>Network packet handling without waiting or buffer overflow providing efficient packet prioritization</li> </ul>
Tx/Rx IP, SCTP, TCP, and UDP checksum offloading (IPv4, IPv6) capabilities	<ul style="list-style-type: none"> <li>Lower processor usage</li> <li>Checksum and segmentation capability extended to new standard packet type</li> </ul>
TxTCP segmentation offload (IPv4, IPv6)	<ul style="list-style-type: none"> <li>Increased throughput and lower processor usage</li> </ul>
Interrupt Throttle Rate (ITR)	<ul style="list-style-type: none"> <li>ITR parameter controls how many interrupts each interrupt vector can generate per second.</li> </ul>
Jumbo frames	<ul style="list-style-type: none"> <li>Supports jumbo frames larger than default 1500</li> </ul>
Large Receive Offload (LRO)	<ul style="list-style-type: none"> <li>Combines multiple Ethernet frames into a single receive in the stack, thereby potentially decreasing CPU usage for receives</li> </ul>
MAC and VLAN anti-spoofing	<ul style="list-style-type: none"> <li>If a malicious driver attempts to send a spoofed packet, it is dropped by the hardware and not transmitted. An interrupt is sent to the PF driver notifying it of the spoof attempt.</li> </ul>
Flow Control	<ul style="list-style-type: none"> <li>Ethernet Flow Control (IEEE 802.3x) support for capable link partner</li> </ul>
HW based receive side coalescing (RSC)	<ul style="list-style-type: none"> <li>Merges multiple frames from the same IPv4 TCP/IP flow into a single structure that can span one or more descriptors.</li> </ul>
<b>Virtualization Features</b>	
PCI-SIG SR-IOV Implementation (up to 64 virtual functions per port)	<ul style="list-style-type: none"> <li>Provides an implementation of the PCI-SIG standard for I/O Virtualization. The physical configuration of each port is divided into multiple virtual ports. Each virtual port is assigned to an individual virtual machine directly by bypassing the virtual switch in the Hypervisor, resulting in near-native performance.</li> <li>Integrated with Intel® VT for Directed I/O (Intel® VT-d) to provide data protection between virtual machines by assigning separate physical addresses in the memory to each virtual machine</li> </ul>
Advanced Packet Filtering	<ul style="list-style-type: none"> <li>24 exact-matched packets (unicast or multicast)</li> <li>4096-bit hash filter for unicast and multicast frames</li> <li>Lower processor usage</li> <li>Promiscuous (unicast and multicast) transfer mode support</li> <li>Optional filtering of invalid frames</li> </ul>
VLAN support with VLAN tag insertion, stripping and packet filtering for up to 4096 VLAN tags	<ul style="list-style-type: none"> <li>Ability to create multiple VLAN segments</li> </ul>

## Manageability Features

Preboot eXecution Environment (PXE) Support	<ul style="list-style-type: none"> <li>Enables system boot up via the LAN (32-bit and 64-bit)</li> <li>Flash interface for PXE image</li> </ul>
Simple Network Management Protocol (SNMP) and Remote Network Monitoring (RMON) Statistic Counters	<ul style="list-style-type: none"> <li>Easy system monitoring with industry-standard consoles</li> </ul>
Watchdog Timer	<ul style="list-style-type: none"> <li>Gives an indication to the manageability firmware or external devices that the chip or the driver is not functioning</li> </ul>

## Specifications

### General

Connectors	<ul style="list-style-type: none"> <li>One or two LC fiber-optic connectors <i>(NOTE: Intel® Ethernet SFP+ Optics are required if optics will be used)</i></li> <li>SFP+ Direct Attach cables</li> </ul>
Network Standards	IEEE 802.3 SFF-8431

### Technical Features

Data rate supported per port	<ul style="list-style-type: none"> <li>Optical: 1 GbE/10 Gb</li> <li>Direct Attach: 10 GbE</li> </ul>												
Bus type	PCI Express 2.0 (5.0 GT/s)												
Bus width	4-lane PCI Express and 8-lane PCI Express												
Interrupt levels	INTA, MSI, MSI-X												
Hardware certifications	FCC B, UL, CE, VCCI, BSMI, CTICK, KCC												
Controller-processor	Intel® 82599 10 Gigabit Ethernet Controller												
Power Consumption	<table border="0"> <tr> <td></td> <td>Single-port</td> <td>Dual Port</td> </tr> <tr> <td>10GBASE-SR/1000BASE-SX</td> <td>Maximum: 8.71W* Typical: 3.9W**</td> <td>10GBASE-SR Maximum: 14.4W* Typical: 4.8W**</td> </tr> <tr> <td>10GBASE-LR/1000BASE-LX</td> <td>Maximum: 8.71W* Typical: 3.9W**</td> <td>10GBASE-LR Maximum: 14.4W* Typical: 4.8W**</td> </tr> <tr> <td>Direct Attached Twinax</td> <td>Maximum: 5.18W* Typical: 4.1W**</td> <td>Direct Attached Maximum: 7.4W* Typical: 4.1 W**</td> </tr> </table>		Single-port	Dual Port	10GBASE-SR/1000BASE-SX	Maximum: 8.71W* Typical: 3.9W**	10GBASE-SR Maximum: 14.4W* Typical: 4.8W**	10GBASE-LR/1000BASE-LX	Maximum: 8.71W* Typical: 3.9W**	10GBASE-LR Maximum: 14.4W* Typical: 4.8W**	Direct Attached Twinax	Maximum: 5.18W* Typical: 4.1W**	Direct Attached Maximum: 7.4W* Typical: 4.1 W**
	Single-port	Dual Port											
10GBASE-SR/1000BASE-SX	Maximum: 8.71W* Typical: 3.9W**	10GBASE-SR Maximum: 14.4W* Typical: 4.8W**											
10GBASE-LR/1000BASE-LX	Maximum: 8.71W* Typical: 3.9W**	10GBASE-LR Maximum: 14.4W* Typical: 4.8W**											
Direct Attached Twinax	Maximum: 5.18W* Typical: 4.1W**	Direct Attached Maximum: 7.4W* Typical: 4.1 W**											
Operating temperature	0 °C to 55 °C (32 °F to 131 °F)												
Air Flow	Minimum of 100 LFM required												
Storage temperature	-40 °C to 70 °C (-40 °F to 158 °F)												
Storage humidity	Maximum: 90% non-condensing relative humidity at 35 °C												
LED Indicators	LINK (solid) and ACTIVITY (blinking) LINK SPEED (green=10 Gbps; yellow=1 Gbps)												
Physical Dimensions	Standard OCP Form Factor												

## Network Operating System (NOS) Support

Operating System	IA-32	x86-64
Windows Server 2008 R2 SP1	N/A	Y
Windows Server 2012	N/A	Y
Windows Server 2012 R2	N/A	Y
Linux* Stable Kernel version 2.6/3.x	Y	Y
Linux RHEL 5.9	Y	Y
Linux RHEL 6.4	Y	Y
Linux SLES 10 SP4	Y	Y
Linux SLES 11 SP2	Y	Y
Free BSD 9	Y	Y
UEFI 2.1/2.3	N/S	Y

\*Calculated max assumes that either SR or LR optics consume 3.15W.

\*\*Average of measurement data taken at nominal voltage and 25 °C temperature

### Intel® Ethernet Server Adapter X520 Series for OCP Product Codes

Configuration	Product Code
Single Port	X520DA10CP <sup>2</sup> X520DA10CPG2P20 <sup>3</sup>
Dual Port	X520DA20CP <sup>2</sup> X520DA20CPG2P20 <sup>3</sup>

### Intel® Ethernet SFP+ Twinaxial Cable Product Codes

Cable Length (m)	Product Code
1	XDACBL1M
3	XDACBL3M
5	XDACBL5M

### Intel® Ethernet SFP+ Optic Product Codes

Configuration	Product Code
SR Optic	E10GSFPSR
LR Optic	E10GSFPLR

#### For product information

To speak to a customer service representative, please call 1-800-538-3373 (U.S. and Canada) or visit [support.intel.com/support/go/network/contact.htm](http://support.intel.com/support/go/network/contact.htm) for the telephone number in your area. For additional product information on Intel Networking Connectivity products, visit [www.intel.com/go/ethernet](http://www.intel.com/go/ethernet).

#### Customer Support

Intel® Customer Support Services offers a broad selection of programs including phone support and warranty service. For more information, contact us at [support.intel.com/support/go/network/adapter/home.htm](http://support.intel.com/support/go/network/adapter/home.htm).

(Service and availability may vary by country.)

For more information on the Intel® Ethernet CNA X520-DA10CP, visit [www.intel.com/go/ethernet](http://www.intel.com/go/ethernet)

<sup>1</sup> Requires a system supporting VMDq.

<sup>2</sup> SMBus enabled.

<sup>3</sup> NC-SI enabled.

INFORMATION IN THIS DOCUMENT IS PROVIDED IN CONNECTION WITH INTEL PRODUCTS. NO LICENSE, EXPRESS OR IMPLIED, BY ESTOPPEL OR OTHERWISE, TO ANY INTELLECTUAL PROPERTY RIGHTS IS GRANTED BY THIS DOCUMENT. EXCEPT AS PROVIDED IN INTEL'S TERMS AND CONDITIONS OF SALE FOR SUCH PRODUCTS, INTEL ASSUMES NO LIABILITY WHATSOEVER AND INTEL DISCLAIMS ANY EXPRESS OR IMPLIED WARRANTY, RELATING TO SALE AND/OR USE OF INTEL PRODUCTS INCLUDING LIABILITY OR WARRANTIES RELATING TO FITNESS FOR A PARTICULAR PURPOSE, MERCHANTABILITY, OR INFRINGEMENT OF ANY PATENT, COPYRIGHT OR OTHER INTELLECTUAL PROPERTY RIGHT.

A "Mission Critical Application" is any application in which failure of the Intel Product could result, directly or indirectly, in personal injury or death. SHOULD YOU PURCHASE OR USE INTEL'S PRODUCTS FOR ANY SUCH MISSION CRITICAL APPLICATION, YOU SHALL INDEMNIFY AND HOLD INTEL AND ITS SUBSIDIARIES, SUBCONTRACTORS AND AFFILIATES, AND THE DIRECTORS, OFFICERS, AND EMPLOYEES OF EACH, HARMLESS AGAINST ALL CLAIMS COSTS, DAMAGES, AND EXPENSES AND REASONABLE ATTORNEYS' FEES ARISING OUT OF, DIRECTLY OR INDIRECTLY, ANY CLAIM OF PRODUCT LIABILITY, PERSONAL INJURY, OR DEATH ARISING IN ANY WAY OUT OF SUCH MISSION CRITICAL APPLICATION, WHETHER OR NOT INTEL OR ITS SUBCONTRACTOR WAS NEGLIGENT IN THE DESIGN, MANUFACTURE, OR WARNING OF THE INTEL PRODUCT OR ANY OF ITS PARTS.

Intel may make changes to specifications and product descriptions at any time, without notice. Designers must not rely on the absence or characteristics of any features or instructions marked "reserved" or "undefined". Intel reserves these for future definition and shall have no responsibility whatsoever for conflicts or incompatibilities arising from future changes to them. The information here is subject to change without notice. Do not finalize a design with this information.

The products described in this document may contain design defects or errors known as errata which may cause the product to deviate from published specifications. Current characterized errata are available on request.

Contact your local Intel sales office or your distributor to obtain the latest specifications and before placing your product order.

Copies of documents which have an order number and are referenced in this document, or other Intel literature, may be obtained by calling 1-800-548-4725, or go to: <http://www.intel.com/design/literature.htm>.

\*Intel, the Intel logo, and Xeon are trademarks of Intel Corporation in the U.S. and other countries. Other names and brands may be claimed as the property of others.

Copyright ©2014 Intel Corporation. All rights reserved.

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Intel:](#)

[X520DA1OCP](#) [E10G42BTDAG1P5](#)



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



#### Как с нами связаться

**Телефон:** 8 (812) 309 58 32 (многоканальный)

**Факс:** 8 (812) 320-02-42

**Электронная почта:** [org@eplast1.ru](mailto:org@eplast1.ru)

**Адрес:** 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.