

Edison base plug fuses – fast-acting, 125 volts, 1/2–12 amps



Catalog symbol:

- W - (amps)

Description:

Bussmann® series fast-acting Edison base plug fuse.

Specifications:

Ratings

- Volts – 125 Vac or less
- Amps – 1/2 to 12 A
- Interrupting rating – 10 kA RMS Sym

Agency Information

- UL® Listed, Std. 248-11, Guide JEFV, File E12112
- CE

| Catalog numbers (amps) | |
|------------------------|-----------|
| W - 1/2 | W - 5 |
| W - 1 | W - 6 |
| W - 1-8/10 | W - 6-1/2 |
| W - 2 | W - 7 |
| W - 2-1/2 | W - 8 |
| W - 3 | W - 10 |
| W - 4 | W - 12 |

Recommended fuse holders

| Catalog numbers | Type box | Catalog numbers | Type box |
|-----------------|--------------|-----------------|-------------|
| SOU | 2 1/4" handy | SOY | 4" square |
| SRU | | SRY | |
| SSU | | SSY | |
| SOW | 2 3/4" handy | SSY-RL | |
| SRW | | STY | |
| SSW | | SCY | |
| SOX | 4" octagon | SOY-B | Single gang |
| SRX | | SSN | |

Package quantity and weight

| Amp ratings | Quantity | | Weight | |
|-------------|----------|----------|---------|-------------|
| | Per box | Per card | Per box | Per 5 cards |
| 15 to 30 A | 4 | 1 | 0.96 | 1.20 |


W-15, W-20, W-25, and W-30 plug fuses obsoleted suggest replacing with either T-(amp) or TL-(amp) plug fuses

Both the T and TL Bussmann series plug fuses offer similar short-circuit protection to the W plug fuses. In addition, the T and TL plug fuses offer time-delay performance for overload currents (typically between one and six times the rated current of the fuse). For most applications, this feature is preferred to allow harmless inrush currents to pass without causing the fuse to open unnecessarily. The TL plug fuses (data sheet No. 1035) utilize a loaded link construction and provide medium-duty performance. The T plug fuses (data sheet No. 1034) utilize the advanced dual-element design for heavy-duty performance. This construction makes the T plug fuses the preferred selection. For additional information, please see the applicable data sheets.

Features:

- For lighting, heating or other circuits that do not contain electric motors
- Edison base size
- These fuses thread into fuse receptacles or Bussmann series box cover units
- The general purpose (W) fuse has no time-delay feature and should not be used in circuits that contain motors

Time-current curve – average melt

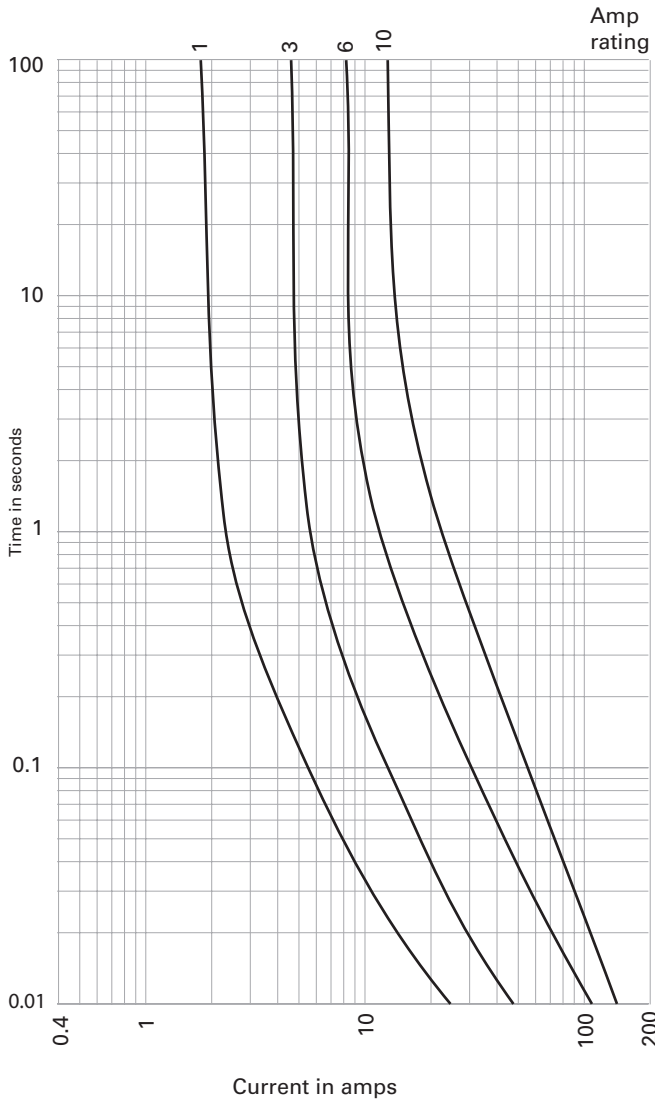

The only controlled copy of this data sheet is the electronic read-only version located on the Eaton network drive. All other copies of this document are by definition uncontrolled. This bulletin is intended to clearly present comprehensive product data and provide technical information that will help the end user with design applications. Eaton reserves the right, without notice, to change design or construction of any products and to discontinue or limit distribution of any products. Eaton also reserves the right to change or update, without notice, any technical information contained in this bulletin. Once a product has been selected, it should be tested by the user in all possible applications.

Eaton
1000 Eaton Boulevard
Cleveland, OH 44122
United States
Eaton.com

Bussmann Division
114 Old State Road
Ellisville, MO 63021
United States
Eaton.com/bussmannseries

© 2016 Eaton
All Rights Reserved
Printed in USA
Publication No. 1036 – SB03177
May 2016

Eaton and Bussmann are valuable trademarks of Eaton in the US and other countries. You are not permitted to use the Eaton trademarks without prior written consent of Eaton.

UL is a registered trademark of the Underwriters Laboratories, Inc.

For Eaton's Bussmann series product information, call 1-855-287-7626 or visit: Eaton.com/bussmannseries



Follow us on social media to get the latest product and support information.





Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.