

ISL98602

5 Channel DC/DC Converter + V_{ON} Slice + Power Good

FN7699
Rev 3.00
March 7, 2012

The ISL98602 represents a high-power, integrated LCD supply IC targeted at large panel LCD displays. The ISL98602 integrates a high-power boost converter for AVDD generation, V_{ON} and V_{OFF} charge pump drivers, one synchronous buck regulator, and one synchronous buck controller for two logic voltages. The V_{ON} slicing circuitry and power good function are also included.

Operating at 1.3MHz, the AVDD boost converter features a 5.5A boost FET. Feedback is taken from the far side of the delay FET for improving regulation. The OVP circuit protects output side components.

The logic synchronous buck converter features two 2.3A FETs operating at 1.3MHz internal clock. The output voltage is set by the IC internally or with a feedback resistor. The soft-start circuitry is also integrated with the buck.

The second logic voltage is generated from a synchronous buck converter with MOSFET controllers. The overcurrent protection is also integrated with the buck.

The charge pump of V_{ON} and V_{OFF} uses the full switching frequency and integrates the driver for high current capability. V_{ON} is further processed through an integrated V_{ON} slice circuit in order to reduce flicker.

Alternative fixed voltages at the boost, Buck1, Buck2, V_{ON} charge pump, and V_{OFF} charge pump are available in ISL98602.


Features

- 9.5V to 15.0V Input Supply
- 1.3MHz Switching Frequency
- 5.5A Integrated Boost for Up to 19V A_{VDD}
- V_{ON} Charge Pump, Up to 36V and 120mA
- V_{OFF} Charge Pump, Down to -10V and 120mA
- Synchronous Buck1 for 3.3V/2.5V with 2.0A Peak FET
- Synchronous Buck2 Controller Output from 0.9V to 2.0V
- On-board AVDD Delay Switch
- V_{ON} Slice Function Integrated
- Power Good Function for TCON Enable
- Automatic Start-Up Sequencing
- UVLO, UVP, OVP, OCP, and OTP Protection
- 40 Ld 6x6 QFN
- Specified for Ambient Operation Over the -40°C to $+85^{\circ}\text{C}$ Temperature Range
- Pb- Free (RoHS Compliant)

Applications

- LCD TV

Pin Configuration

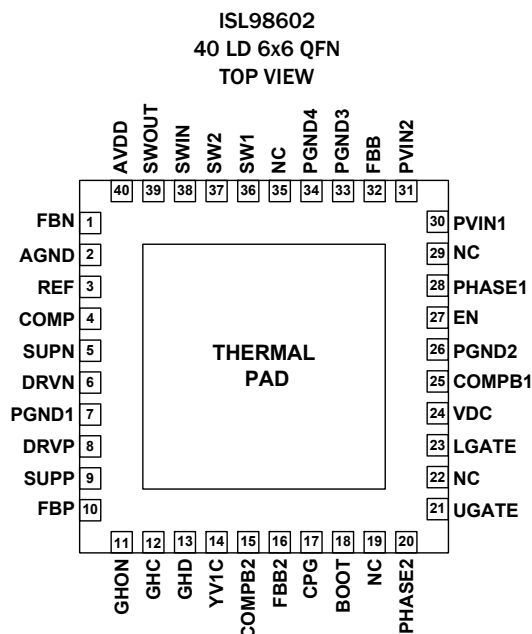

© Copyright Intersil Americas LLC 2010-2012. All Rights Reserved.
All trademarks and registered trademarks are the property of their respective owners.

For additional products, see www.intersil.com/en/products.html

Intersil products are manufactured, assembled and tested utilizing ISO9001 quality systems as noted
in the quality certifications found at www.intersil.com/en/support/qualandreliability.html

Intersil products are sold by description only. Intersil may modify the circuit design and/or specifications of products at any time without notice, provided that such modification does not, in Intersil's sole judgment, affect the form, fit or function of the product. Accordingly, the reader is cautioned to verify that datasheets are current before placing orders. Information furnished by Intersil is believed to be accurate and reliable. However, no responsibility is assumed by Intersil or its subsidiaries for its use; nor for any infringements of patents or other rights of third parties which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of Intersil or its subsidiaries.

For information regarding Intersil Corporation and its products, see www.intersil.com



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.