


Evaluation Kit Description

Rev. 1.00 / November 2012

ZSPM4121

Under-Voltage Load Switch Evaluation Kit



Power Management



Power and Precision

ZSPM4121

Evaluation Kit



The Analog Mixed Signal Company



Restrictions:

Zentrum Mikroelektronik Dresden AG's ZSPM4121 Evaluation Kit is designed for evaluation of the ZSPM4121, laboratory setup, and module development only. This kit must not be used for module production and production test setups.

Zentrum Mikroelektronik Dresden AG (ZMD AG, ZMDI) shall not be liable for any damages arising out of defects resulting from (i) delivered hardware (ii) non-observance of instructions contained in this manual, or (iii) misuse, abuse, use under abnormal conditions or alteration by anyone other than ZMD AG. To the extent permitted by law, ZMD AG hereby expressly disclaims and User expressly waives any and all warranties, whether express, implied, or statutory, including, without limitation, implied warranties of merchantability and of fitness for a particular purpose, statutory warranty of non-infringement and any other warranty that may arise by reason of usage of trade, custom, or course of dealing.

Contents

1	Kit Contents	3
2	Introduction	3
3	Connectors	4
4	Probe and Test Points	4
5	Setup	4
6	Evaluation Board Schematic	5
7	Evaluation Board Layout	6
8	Related Documents	7
9	Document Revision History	7



1 Kit Contents

- ZSPM4121 Evaluation Board
- Kit Documentation


2 Introduction

The ZSPM4121 Evaluation Board is a compact system intended to facilitate measuring the performance and operating characteristics of the ZSPM4121 Under-Voltage Load Switch. The board contains a number of test points to allow evaluating the functions of the ZSPM4121 (see Figure 2.1 and section 4). It has a solid ground plane.

Note: The default part number for the ZSPM4121 Under-Voltage Load Switch (U1 in the schematic in Figure 6.1) is ZSPM4121AI1Wxx, where xx refers to the factory-configured voltage threshold which is determined by the version of the ZSPM4121 Evaluation Board ordered. Contact ZMDI for available board versions.

Note: The default configuration of the Evaluation Board is with the NPG pin pulled up to V_{in} via R1 and therefore R2 is unpopulated (NL designation in the schematic in Figure 6.1). If the application requires that NPG be pulled up to V_{out} , remove R1 and install R2.

Figure 2.1 ZSPM4121 Evaluation Board Connections

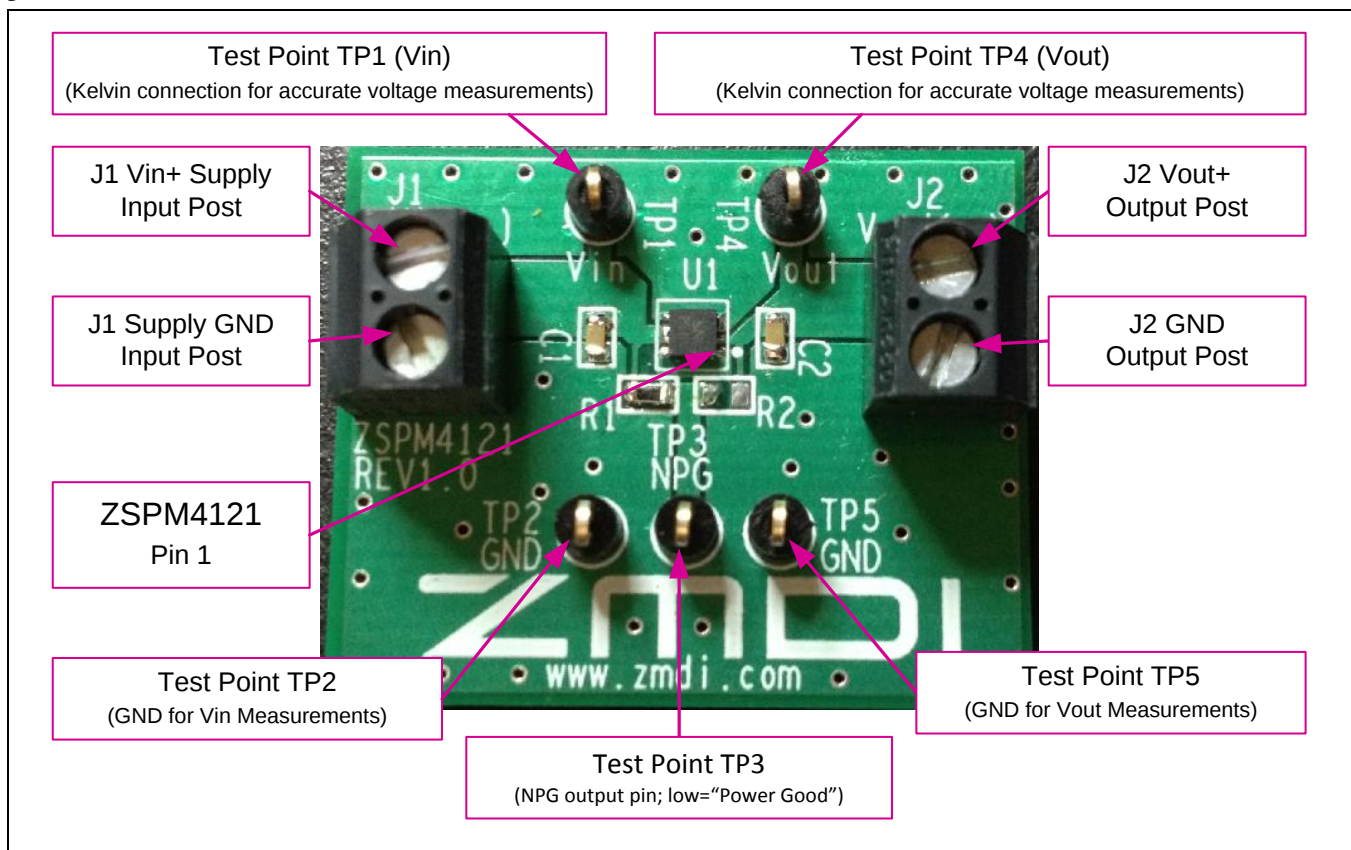



3 Connectors

The board contains the following connectors to external signals and supplies (see Figure 2.1):

- J1:** Screw terminal connection for Vin supply (Vin+ and GND)
- J2:** Screw terminal connection to Vout output (Vout+ and GND)

4 Probe and Test Points

The board contains the following test/probe points (see Figure 2.1):

- TP1/Vin:** Kelvin measurement test point for Vin main input
- TP4/Vout:** Kelvin measurement test point for Vout output
- TP3/NPG:** Measurement point for the ZSPM4121's open-drain N-channel NPG output pin 8 (low indicates "Power Good")
- TP2/GND:** Test point for ground; recommended ground for accurate measurements for Vin
- TP5/GND:** Test point for ground; recommended ground for accurate measurements for Vout

5 Setup

Connect the input voltage supply for the ZSPM4121 at the J1 screw terminal with the leads connected shown in Figure 2.1.

The output of the Evaluation Board can be measured at the J2 screw terminal.

Recommendation: Use J1 and J2 only for power connections. Use test points TP1 (Vin) and TP4 (Vout) as Kelvin connections for accurate voltage measurements (see Figure 2.1).

ZSPM4121

Evaluation Kit

ZMDI[®]

The Analog Mixed Signal Company



6 Evaluation Board Schematic

Figure 6.1 ZSPM4121 Evaluation Board Circuit

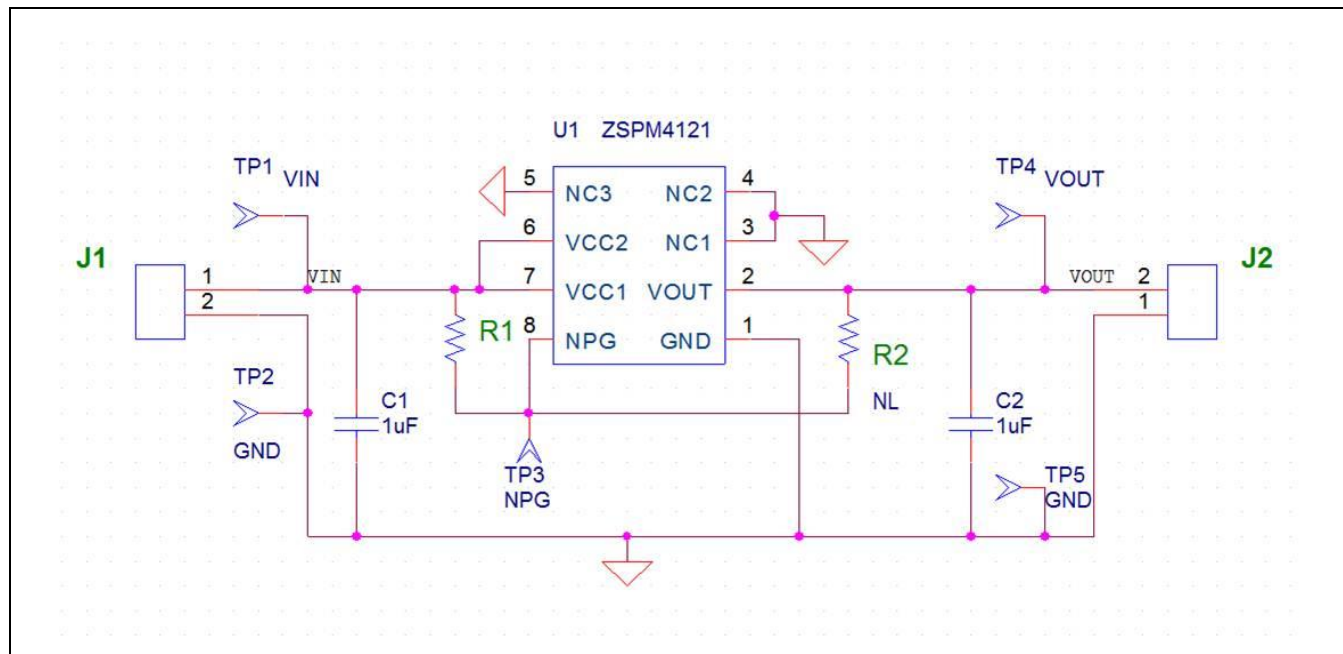


Table 6.1 ZSPM4121 Evaluation Board Bill of Materials (BOM)

QTY	Reference	Description	Manufacturer	Manufacturer P/N	Digikey P/N
1	U1	ZSPM4121	ZMDI	ZSPM4121AI1Wxx*	N/A
2	C1	CAP CER 1UF 25V 10% X5R 0603	TDK	C1608X5R1E105K	445-5146-2-ND
	C2	CAP CER 1UF 25V 10% X5R 0603	TDK	C1608X5R1E105K	445-5146-2-ND
1	R1	RES 1K OHM 1/10W 5% 0603 SMD	Stackpole	RMCF0603JT1K00	RMCF0603JT1K00CT-ND
0	R2	Do not populate			
5	TP1	Test Point	Keystone	5001K-ND	5001
	TP2	Test Point	Keystone	5001K-ND	5001
	TP3	Test Point	Keystone	5001K-ND	5001

* xx refers to the factory-configured voltage threshold, which is determined by the version of the ZSPM4121 Evaluation Board ordered. Contact ZMDI for available board versions.

ZSPM4121

Evaluation Kit

ZMDI[®]


The Analog Mixed Signal Company



QTY	Reference	Description	Manufacturer	Manufacturer P/N	Digikey P/N
	TP4	Test Point	Keystone	5001K-ND	5001
	TP5	Test Point	Keystone	5001K-ND	5001
2	J1, J2	TERMINAL BLOCK 3.5MM 2POS PCB	On Shore Technology Inc	ED555/2DS	ED1514-ND

7 Evaluation Board Layout

Figure 7.1 ZSPM4121 Evaluation Board Layout – Top View

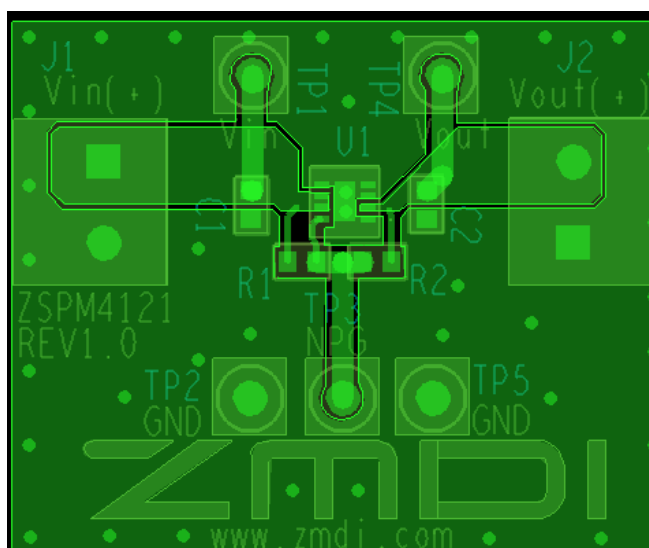

ZSPM4121

Evaluation Kit



The Analog Mixed Signal Company



8 Related Documents

Note: X_xy refers to the latest version of the document.

File Name	File Name
ZSPM4121 Data Sheet	ZSPM4121_Data_Sheet_rev_X_xy.pdf
ZSPM4121 Feature Sheet	ZSPM4121_Feature_Sheet_rev_X_xy.pdf

Visit ZMDI's website www.zmdi.com or contact your nearest sales office for the latest version of these documents.

9 Document Revision History

Revision	Date	Description
1.00	November 14, 2012	First release.

Sales and Further Information		www.zmdi.com	PRODUCT@ZMDI.COM
Zentrum Mikroelektronik Dresden AG Global Headquarters Grenzstrasse 28 01109 Dresden, Germany Central Office: Phone +49.351.8822.306 Fax +49.351.8822.337	ZMD America, Inc. 1525 McCarthy Blvd., #212 Milpitas, CA 95035-7453 USA USA Phone 1.855.275.9634 Phone +1.408.883.6310 Fax +1.408.883.6358	Zentrum Mikroelektronik Dresden AG, Japan Office 2nd Floor, Shinbashi Tokyu Bldg. 4-21-3, Shinbashi, Minato-ku Tokyo, 105-0004 Japan Phone +81.3.6895.7410 Fax +81.3.6895.7301	ZMD FAR EAST, Ltd. 3F, No. 51, Sec. 2, Keelung Road 11052 Taipei Taiwan Phone +886.2.2377.8189 Fax +886.2.2377.8199
European Technical Support Phone +49.351.8822.7.772 Fax +49.351.8822.87.772	DISCLAIMER: This information applies to a product under development. Its characteristics and specifications are subject to change without notice. Zentrum Mikroelektronik Dresden AG (ZMD AG) assumes no obligation regarding future manufacture unless otherwise agreed to in writing. The information furnished hereby is believed to be true and accurate. However, under no circumstances shall ZMD AG be liable to any customer, licensee, or any other third party for any special, indirect, incidental, or consequential damages of any kind or nature whatsoever arising out of or in any way related to the furnishing, performance, or use of this technical data. ZMD AG hereby expressly disclaims any liability of ZMD AG to any customer, licensee or any other third party, and any such customer, licensee and any other third party hereby waives any liability of ZMD AG for any damages in connection with or arising out of the furnishing, performance or use of this technical data, whether based on contract, warranty, tort (including negligence), strict liability, or otherwise.		
European Sales (Stuttgart) Phone +49.711.674517.55 Fax +49.711.674517.87955			
Zentrum Mikroelektronik Dresden AG, Korea Office U-space 1 Building Unit B, 906-1 660, Daewangpangyo-ro Bundang-gu, Seongnam-si Gyeonggi-do, 463-400 Korea Phone +82.31.950.7679 Fax +82.504.841.3026			

Kit Description November 14, 2012	© 2012 Zentrum Mikroelektronik Dresden AG — Rev. 1.00 A All rights reserved. The material contained herein may not be reproduced, adapted, merged, translated, stored, or used without the prior written consent of the copyright owner. The information furnished in this publication is subject to changes without notice.	7 of 7
--------------------------------------	---	--------



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.