




SCALE 2:1

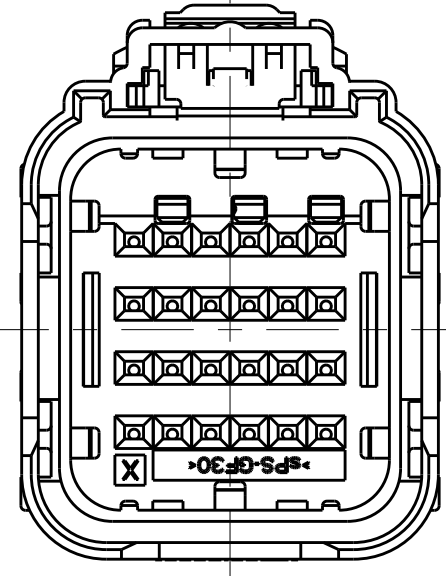


OPTION "B"

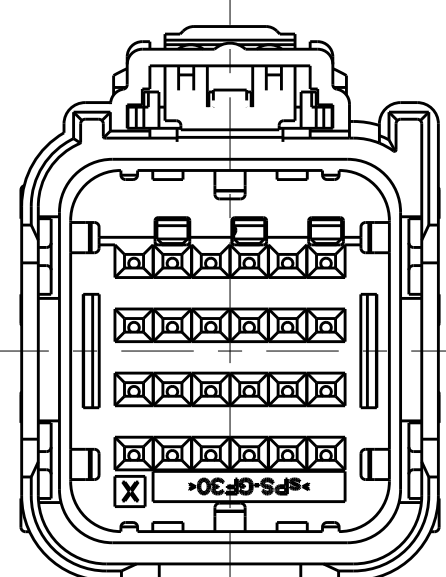


OPTION "D"

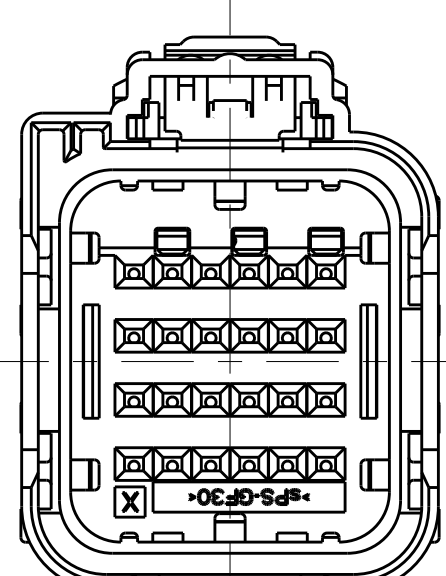

OPTION "F"

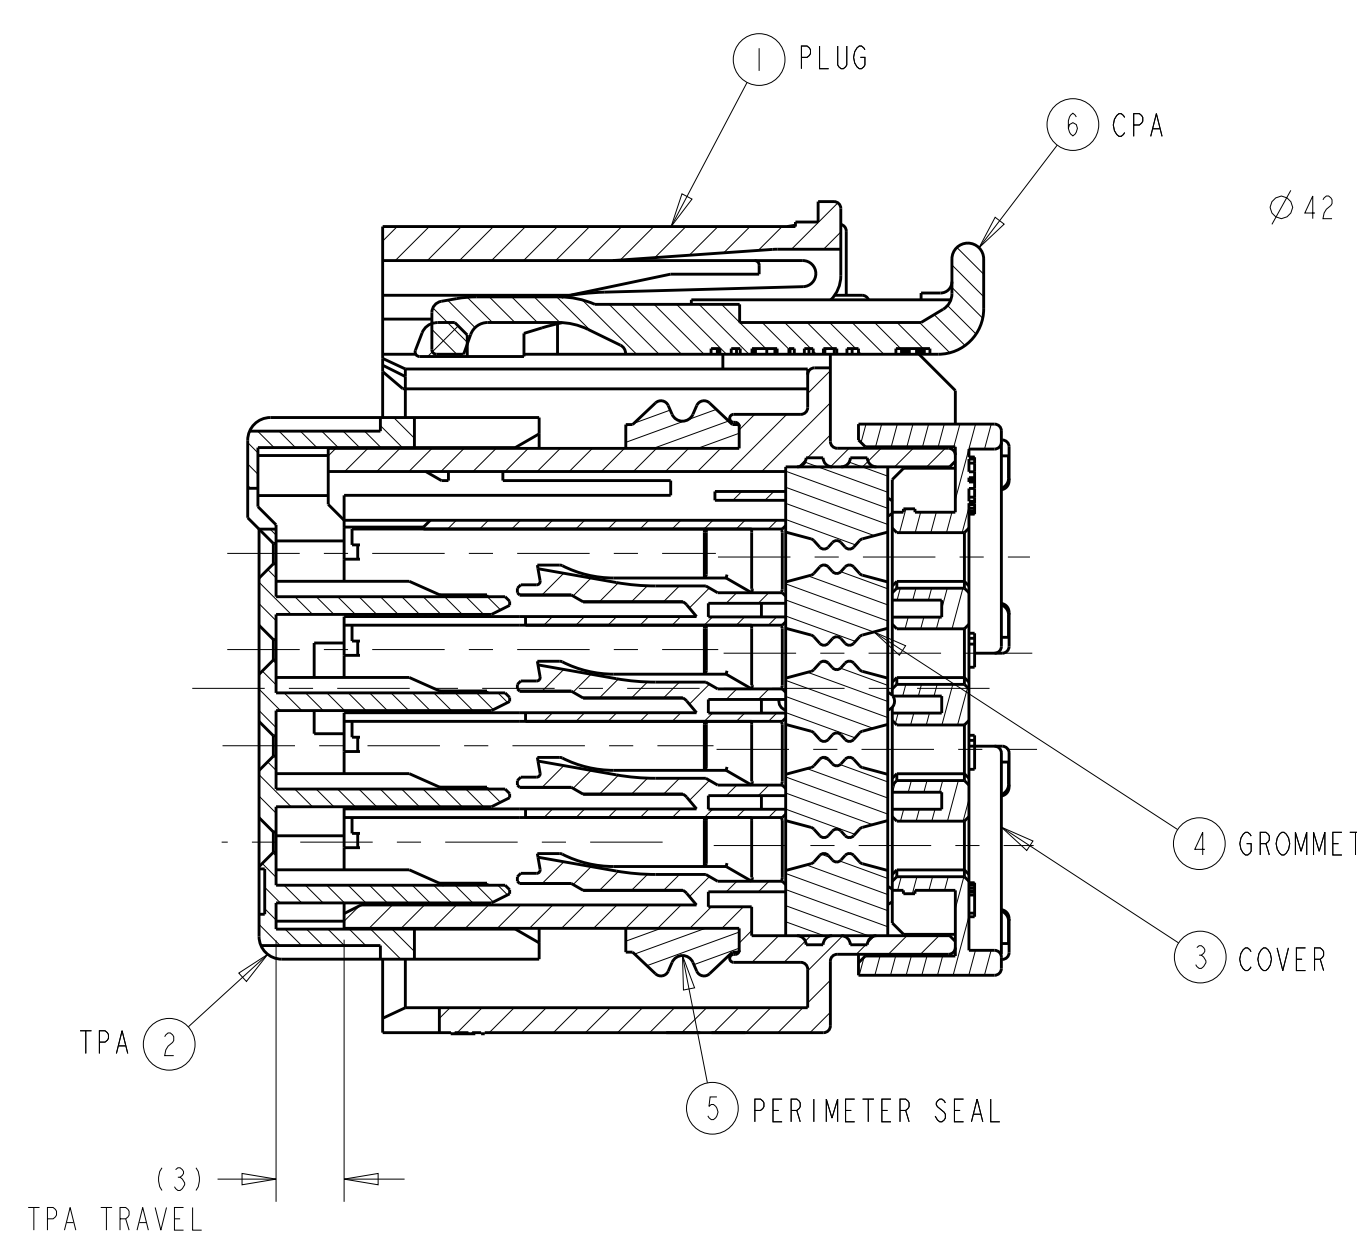


SECTION A-A
SHOWN WITH TPA IN
IT'S PRE-LOADED POSITION
(DELIVERY CONDITON)

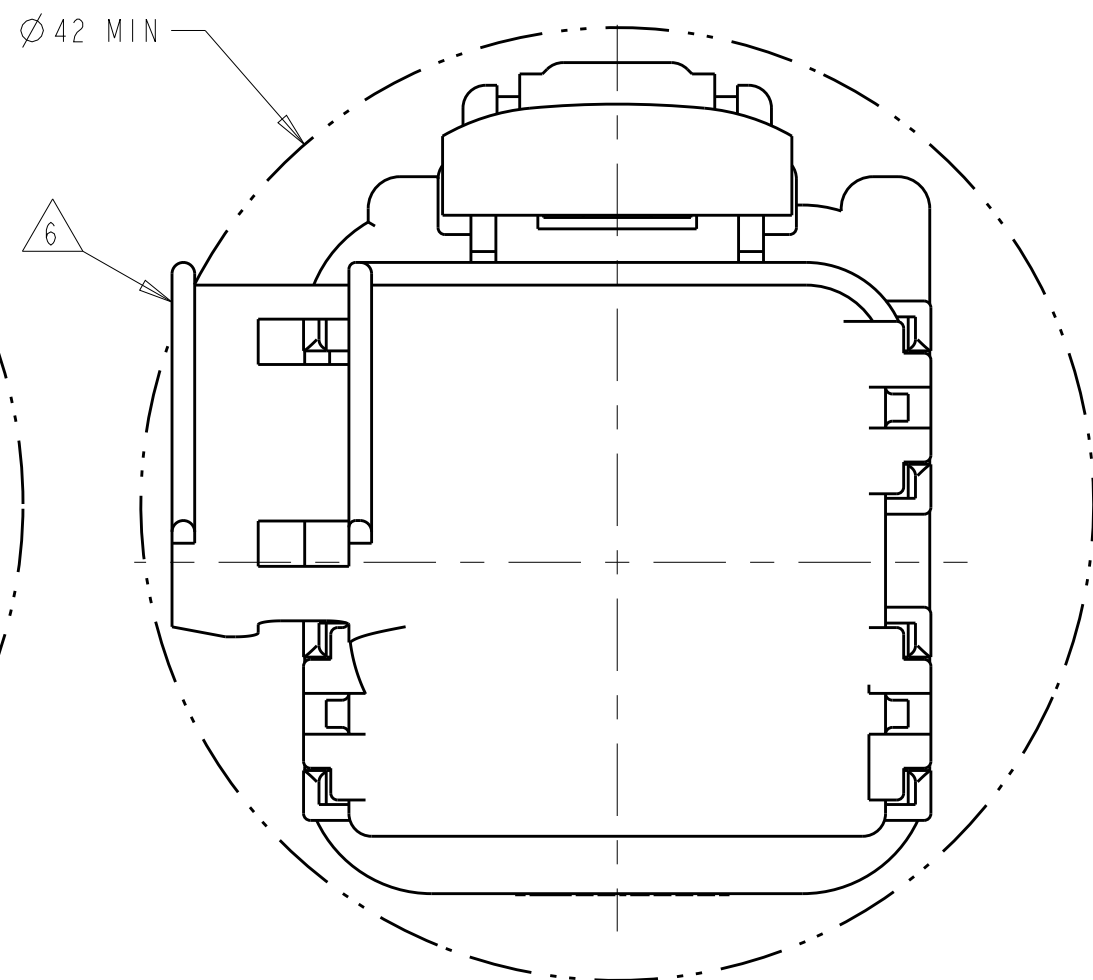


MINIMUM FEED THROUGH CONDITION
WITH 1mm CLEARANCE ALL AROUND
SHOWN WITH OPTION WIRESHIELD

1. APPLICABLE TERMINAL PART NUMBERS (SOLD SEPARATELY):
FOR TIN APPLICATIONS: 1393367 AND 1393366.
FOR GOLD APPLICATIONS: 1393365 AND 1393364.
FOR TERMINATION AND REELING OPTIONS
SEE DRAWINGS 1393367, 1393366, 1393365, AND 1393364.
2. COMPATIBLE WIRE SIZES FOR MAT SEAL DESIGN 1.19 TO 2.06 O.D.
(22-18 AWG, 0.35-0.75 mm2)
3. TPA IS SHIPPED IN IT'S PRE-LOADED POSITION. ALL ASSEMBLIES ARE
TO BE TRAY PACKAGED.
4. CUSTOMER PART NUMBER AND TRACEABILITY CODE (YY = TWO DIGIT YEAR,
JJJ = JULIAN DAY, HH = TWO DIGIT MILITARY HOUR, A = ASSEMBLY
PROCESS USED) ARE PRINTED IN THIS LOCATION.
5. PART ASSEMBLY WEIGHT WITHOUT TERMINALS AND WITH STANDARD PIN-OUT
CONFIGURATION IS 14.39 GRAMS.
6. OPTIONAL WIRESHIELD P/N 7-1419157-8 (SOLD SEPARATELY). PLEASE CONTACT
YOUR TE SALES REPRESENTATIVE FOR AVAILABILITY AND PRICING.

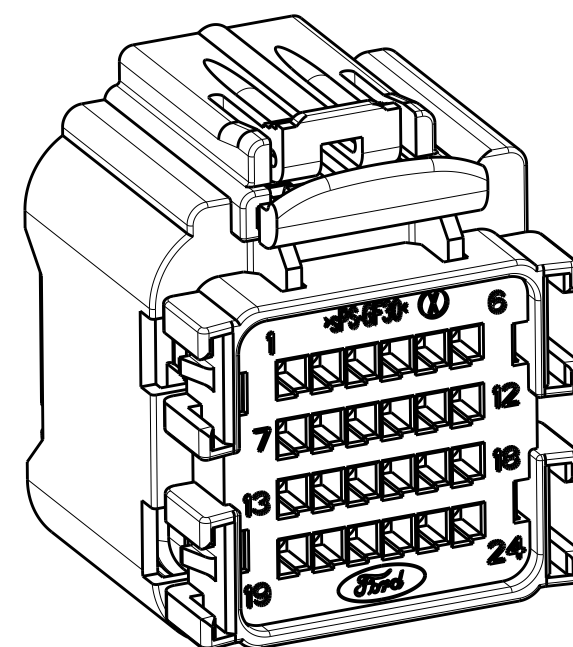

SCALE 2:1

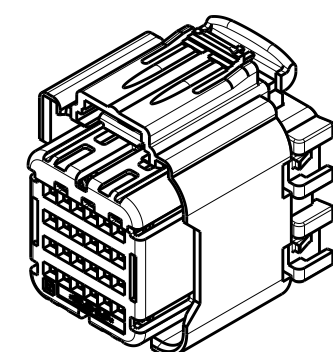

SCALE 1:1

KEYING OPTION "A" SHOWN

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN M FORISKA 16APR2002		
		CHK M FORISKA 16APR2002		
DIMENSIONS: mm		TOLERANCES, UNLESS OTHERWISE SPECIFIED: 0. PLC ±.1 1. PLC ±0.3 2. PLC ±0.10 3. PLC ±.1 4. PLC ±.1		NAME 24 WAY ARM, PLUG ASSEMBLY WITHOUT SHORTING BARS, CUSTOMER SPEC.
		PRODUCT SPEC -		
MATERIAL SEE CHART ABOVE		APPLICATION SPEC -		SIZE A1
FINISH -		WEIGHT SEE NOTE 5		CASE CODE 00779
		DRAWING NO C=3-1419157-9		RESTRICTED TO -
		CUSTOMER DRAWING SCALE 3:1		SHEET 1 OF 3 REV BK

PIN-OUT CHART																							
12	13	14	15	16	17	18	19	20	21	22	23	24	1-1438103-5	KEY "A"									
12	13	14	15	16	17	18	19	20	21	22	23	24	1-1438356-2	KEY "D"									
12	13	14	15	16	18	19	20	21	22	23	24	2-1438095-3	KEY "B"										
12	13	14	15	16	17	18	19	20	21	22	23	24	1-1438103-4	KEY "A"									
	13	14	15	16	17	18	19	20	21	22	23	24	1438582-3	KEY "E"									
	13	14	15	16	17	18	19	20	21	22	23	24	1-1438356-1	KEY "D"									
12	13	14	15	16	18	19	20	21	22	23	24	1-1438096-4	KEY "C"										
12	13	14	15	16	18	19	20	21	22	23	24	1-1438103-3	KEY "A"										
	13	14	15	16	17	18	19	20	21	22	23	24	1-1438356-0	KEY "D"									
12	13	14	15	16	18	19	20	21	22	23	24	2-1438095-2	KEY "B"										
12	13	14	15	16	18	19	20	21	22	23	24	1-1438096-3	KEY "C"										
12	13	14	15	16	18	19	20	21	22	23	24	1-1438096-2	KEY "C"										
12	13	14	15	16	18	19	20	21	22	23	24	1-1438096-1	KEY "C"										
13	14	15	16	17	18	19	20	21	22	23	24	1438583-3	KEY "F"										
13	14	15	16	17	18	19	20	21	22	23	24	1438583-2	KEY "F"										
	13	14	15	16	17	18	19	20	21	22	23	24	1438583-1	KEY "F"									
	13	14	15	16	17	18	19	20	21	22	23	24	1438582-2	KEY "E"									
	13	14	15	16	17	18	19	20	21	22	23	24	1438582-1	KEY "E"									
	13	14	15	16	17	18	19	20	21	22	23	24	1-1438103-2	KEY "A"									
12	13	14	15	16	18	19	20	21	22	23	24	2-1438095-1	KEY "B"										
12	13	14	15	16	18	19	20	21	22	23	24	2-1438095-0	KEY "B"										
12	13	14	15	16	18	19	20	21	22	23	24	1-1438095-9	KEY "B"										
13	14	15	16	17	18	19	20	21	22	23	24	1-1438103-1	KEY "A"										
12	13	14	15	16	18	19	20	21	22	23	24	1-1438095-8	KEY "B"										
12	13	14	15	16	18	19	20	21	22	23	24	1-1438095-7	KEY "B"										
12	13	14	15	16	17	18	19	20	21	22	23	24	1-1438103-0	KEY "A"									
13	14	15	16	17	18	19	20	21	22	23	24	2-1438103-0	KEY "A"										
	13	14	15	16	17	18	19	20	21	22	23	24	1438356-9	KEY "D"									
12	13	14	15	16	18	19	20	21	22	23	24	1438356-8	KEY "D"										
12	13	14	15	16	18	19	20	21	22	23	24	1438103-9	KEY "A"										
12	13	14	15	16	18	19	20	21	22	23	24	1-1438095-6	KEY "B"										
12	13	14	15	16	18	19	20	21	22	23	24	1-1438095-5	KEY "B"										
12	13	14	15	16	18	19	20	21	22	23	24	1-1438095-4	KEY "B"										
12	13	14	15	16	18	19	20	21	22	23	24	1438356-7	KEY "D"										
12	13	14	15	16	17	18	19	20	21	22	23	24	1438356-6	KEY "D"									
12	13	14	15	16	18	19	20	21	22	23	24	1438356-5	KEY "D"										
12	13	14	15	16	17	18	19	20	21	22	23	24	1438356-4	KEY "D"									
12	13	14	15	16	18	19	20	21	22	23	24	1-1438095-3	KEY "B"										
12	13	14	15	16	17	18	19	20	21	22	23	24	1-1438095-2	KEY "B"									
13	14	15	16	17	18	19	20	21	22	23	24	1438103-8	KEY "A"										
12	13	14	15	16	17	18	19	20	21	22	23	24	1438356-3	KEY "D"									
	13	14	15	16	17	18	19	20	21	22	23	24	1-1438095-1	KEY "B"									
	13	14	15	16	18	19	20	21	22	23	24	1-1438096-0	KEY "C"										
	13	14	15	16	18	19	20	21	22	23	24	1438096-9	KEY "C"										
	13	14	15	16	18	19	20	21	22	23	24	1438096-8	KEY "C"										
13	14	15	16	17	18	19	20	21	22	23	24	1438096-7	KEY "C"										
	13	14	15	16	18	19	20	21	22	23	24	1438096-4	KEY "C"										
13	14	15	16	17	18	19	20	21	22	23	24	1438096-3	KEY "C"										
	13	14	15	16	17	18	19	20	21	22	23	24	1438096-2	KEY "C"									
	13	14	15	16	17	18	19	20	21	22	23	24	1-1438095-0	KEY "B"									
	13	14	15	16	18	19	20	21	22	23	24	1438095-9	KEY "B"										
	13	14	15	16	17	18	19	20	21	22	23	24	1438095-8	KEY "B"									
	13	14	15	16	17	18	19	20	21	22	23	24	1438095-7	KEY "B"									
12	13	14	15	16	18	19	20	21	22	23	24	1438095-6	KEY "B"										
	13	14	15	16	18	19	20	21	22	23	24	1438095-5	KEY "B"										
12	13	14	15	16	18	19	20	21	22	23	24	1438095-3	KEY "B"										
12	13	14	15	16	18	19	20	21	22	23	24	1438095-4	KEY "B"										
	13	14	15	16	18	19	20	21	22	23	24	1438095-2	KEY "B"										
12	13	14	15	16	18	19	20	21	22	23	24	1438356-2	KEY "D"										
12	13	14	15	16	18	19	20	21	22	23	24	1438103-7	KEY "A"										
12	13	14	15	16	18	19	20	21	22	23	24	1438103-6	KEY "A"										
	13	14	15	16	17	18	19	20	21	22	23	24	1438103-5	KEY "A"									
12	13	14	15	16	18	19	20	21	22	23	24	1438103-4	KEY "A"										
	13	14	15	16	17	18	19	20	21	22	23	24	1438096-5	KEY "C"									
	13	14	15	16	18	19	20	21	22	23	24	1438103-3	KEY "A"										
	13	14	15	16	17	18	19	20	21	22	23	24	1438103-2	KEY "A"									
	13	14	15	16	17	18	19	20	21	22	23	24	7-1419157-7	KEY "A"									
	13	14	15	16	18	19	20	21	22	23	24	1438096-6	KEY "C"										
	13	14	15	16	18	19	20	21	22	23	24	1438103-1	KEY "A"										
	13	14	15	16	18	19	20	21	22	23	24	1438356-1	KEY "D"										
	13	14	15	16	18	19	20	21	22	23	24	4-1419171-1	KEY "C"										
	13	14	15	16	18	19	20	21	22	23	24	4-1419171-0	KEY "B"										
	13	14	15	16	18	19	20	21	22	23	24	3-1419171-9	KEY "A"										
12	13	14	15	16	17	18	19	20	21	22	23	24	ASSEMBLY PART NUMBER	PLUG KEYING OPTION									
HOLE POSITION																							
CAVITIES WITH A NUMERIC SYMBOL INDICATE CLOSED TERMINAL HOLE POSITIONS																							
BLANK CAVITIES INDICATE OPEN TERMINAL HOLE POSITIONS																							



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.