

Technical drawing of a mechanical part, likely a shaft or pin, showing a side view with dimensions and a cross-sectional view with dimensions. The side view shows a long cylindrical shaft with a central hole, a shoulder, and a flange. The cross-sectional view shows a rectangular block with a central hole and a smaller hole on the side. Dimensions are given in millimeters.

Side View Dimensions:

- Overall length: 5.30 (5.00)
- Distance from left end to first shoulder: 2.55 (2.50)
- Distance from first shoulder to second shoulder: 2.90 (2.60)
- Distance from second shoulder to end: 2.55 (2.50)
- Overall diameter: 2.80
- Distance from left end to center of hole: 1.15 (2' PLC)

Cross-sectional View Dimensions:

- Overall width: 5.30 (5.00)
- Distance from left end to center of hole: 2.55 (2.50)
- Distance from center of hole to right end: 2.90 (2.60)
- Distance from left end to center of hole: 2.55 (2.50)
- Overall diameter: 2.80
- Distance from left end to center of hole: 1.15 (2' PLC)

Other Dimensions:

- Radius: R0.40
- Feature: 4' PLC




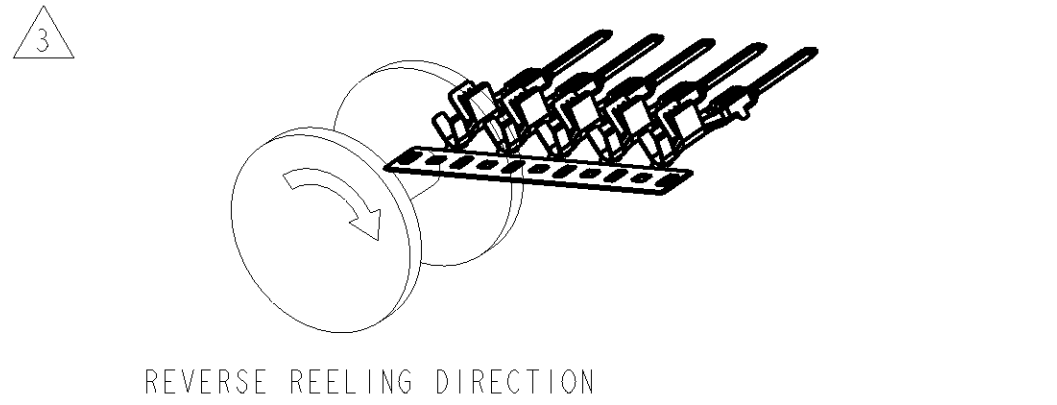


Figure 10-10 is a technical drawing showing the front view of a mechanical part. The drawing includes the following dimensions:

- Overall width: 4.10 ± 0.05
- Overall height: $3.30^{+0.05}_{-0.10}$
- Height of the upper section: 2.45 ± 0.05

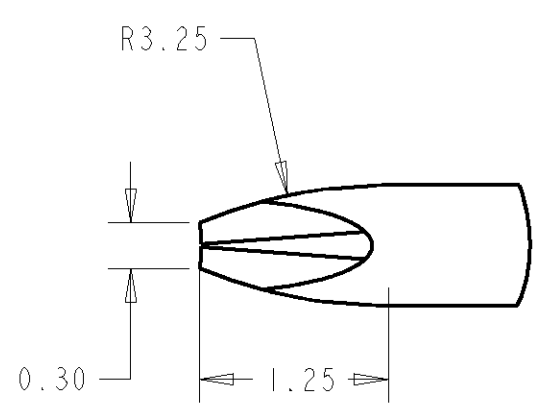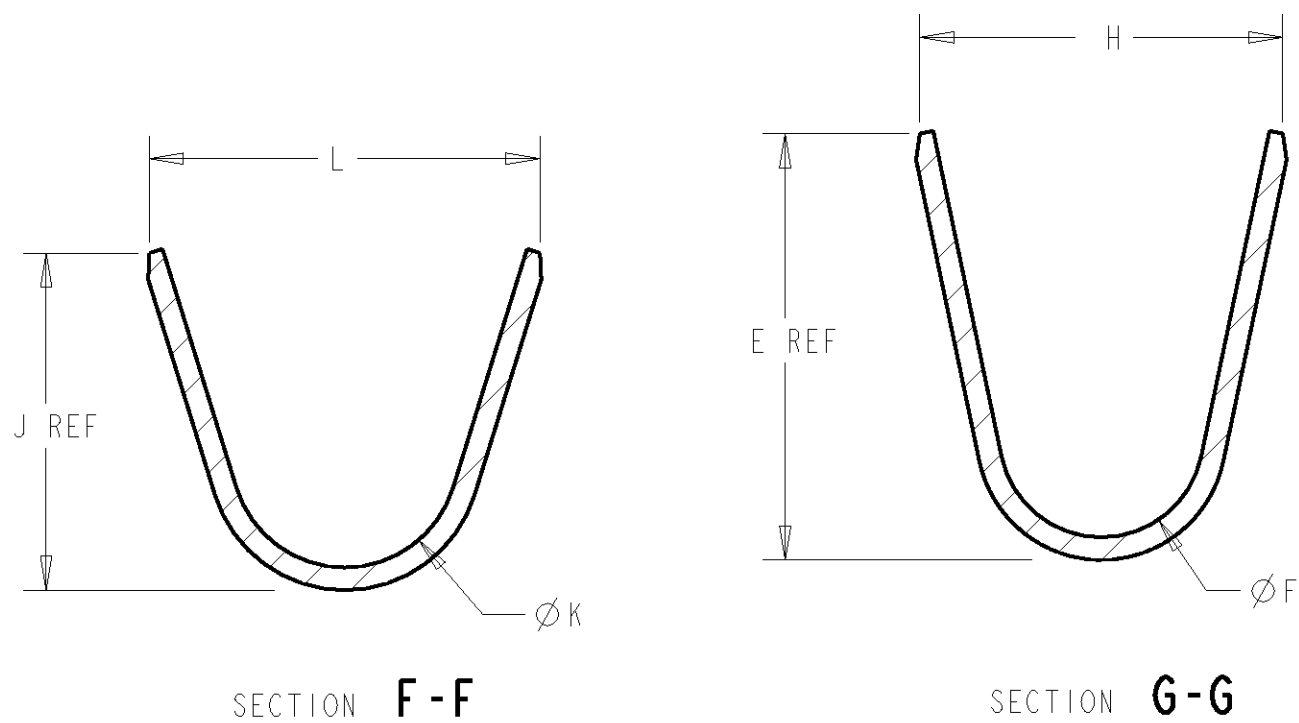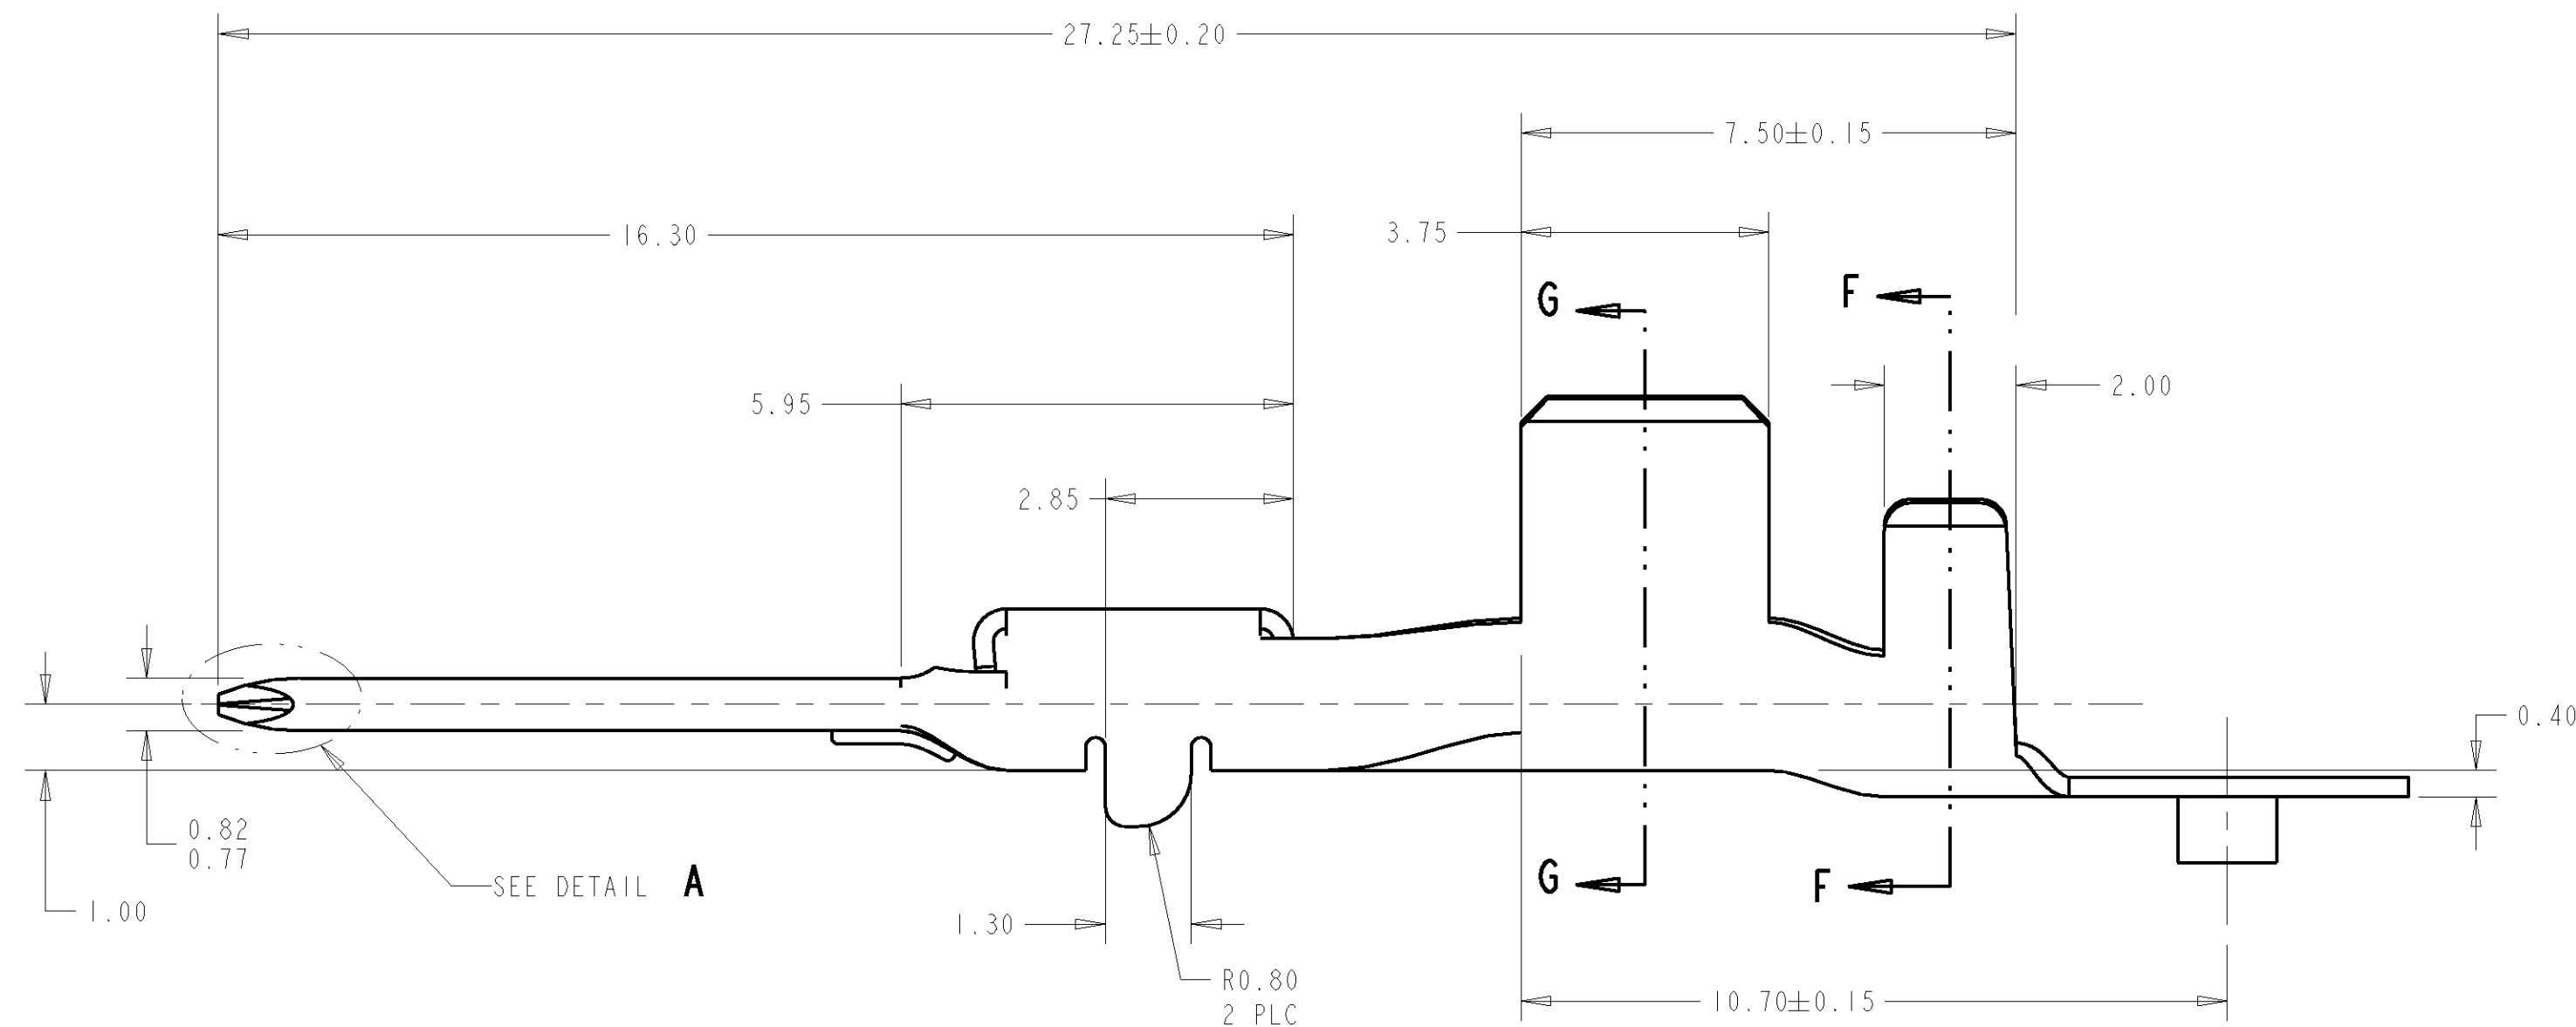

3	1-1326029-0 REELED FOR AMP APPLICATOR						REFERENCE DUAL CRIMP TABLE	1-1326029-2
	1326029-9 REELED FOR AMP APPLICATOR						REFERENCE DUAL CRIMP TABLE	1-1326029-1
2	4.6	1.80	5.35	3.9	1.70	3.88	REFERENCE DUAL CRIMP TABLE	1-1326029-0
	3.6	1.40	4.32	3.3	1.30	2.76	REFERENCE DUAL CRIMP TABLE	1326029-9
3	1326029-4 REELED FOR AMP APPLICATORS						12 AWG	1326029-8
	1326029-3 REELED FOR AMP APPLICATORS						14-16 AWG	1326029-7
	1326029-2 REELED FOR AMP APPLICATORS						18-20 AWG	1326029-6
	1326029-1 REELED FOR AMP APPLICATORS						22 AWG	1326029-5
2	5.2	3.20	4.22	4.7	2.70	5.25	12 AWG	1326029-4
	3.8	1.80	3.16	3.9	1.70	3.88	14-16 AWG	1326029-3
	3.1	1.40	2.55	3.3	1.30	2.76	18-20 AWG	1326029-2
	2.6	1.00	2.04	2.5	0.90	2.11	22 AWG	1326029-1
REELING	L	ØK	J	H	ØF	E	WIRE SIZE	PART NO.

THIS DRAWING IS THE PROPERTY OF AMP ELECTRONICS CORPORATION. IT IS TO BE USED FOR THE MANUFACTURE OF AMP PRODUCTS ONLY. IT IS TO BE KEPT IN THE POSSESSION OF THE PERSON TO WHOM IT IS LOANED AND IS NOT TO BE REPRODUCED OR COPIED IN ANY MANNER WITHOUT THE WRITTEN PERMISSION OF AMP ELECTRONICS CORPORATION. IT IS TO BE RETURNED TO AMP ELECTRONICS CORPORATION WHEN NO LONGER REQUIRED FOR THE ABOVE PURPOSES.		DWN <u>D. STRAUSSER</u> 27APR99 CHW <u>D. BROWN</u> 27APR99 APV <u>D. BROWN</u> 27APR99		AMP Tyco Electronics Harrisburg, PA 17105-3608	
DIMENSIONS: UNLESS OTHERWISE SPECIFIED: mm		TOLERANCES, UNLESS OTHERWISE SPECIFIED: 0 PLC $\pm$.010 1 PLC $\pm$.020 2 PLC $\pm$.030 3 PLC $\pm$.040 4 PLC $\pm$.050 ANGLES $\pm$ $^{\circ}$ 90		NAME 2.8mm BLADE, UNSEALED	
		PRODUCT SPEC <u>SAE/J58CAR-2 8/97</u>		APPLICATION SPEC <u>114-13013</u>	
MATERIAL 		FINISH 		SIZE CASE CODE DRAWING NO RESTRICTED TO <u>A</u> <u>00779</u> <u>C</u> <u>1326029</u> <u>-</u>	
CUSTOMER DRAWING		SCALE 10:1 SHEET 1 OF 1 REV G			



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.