
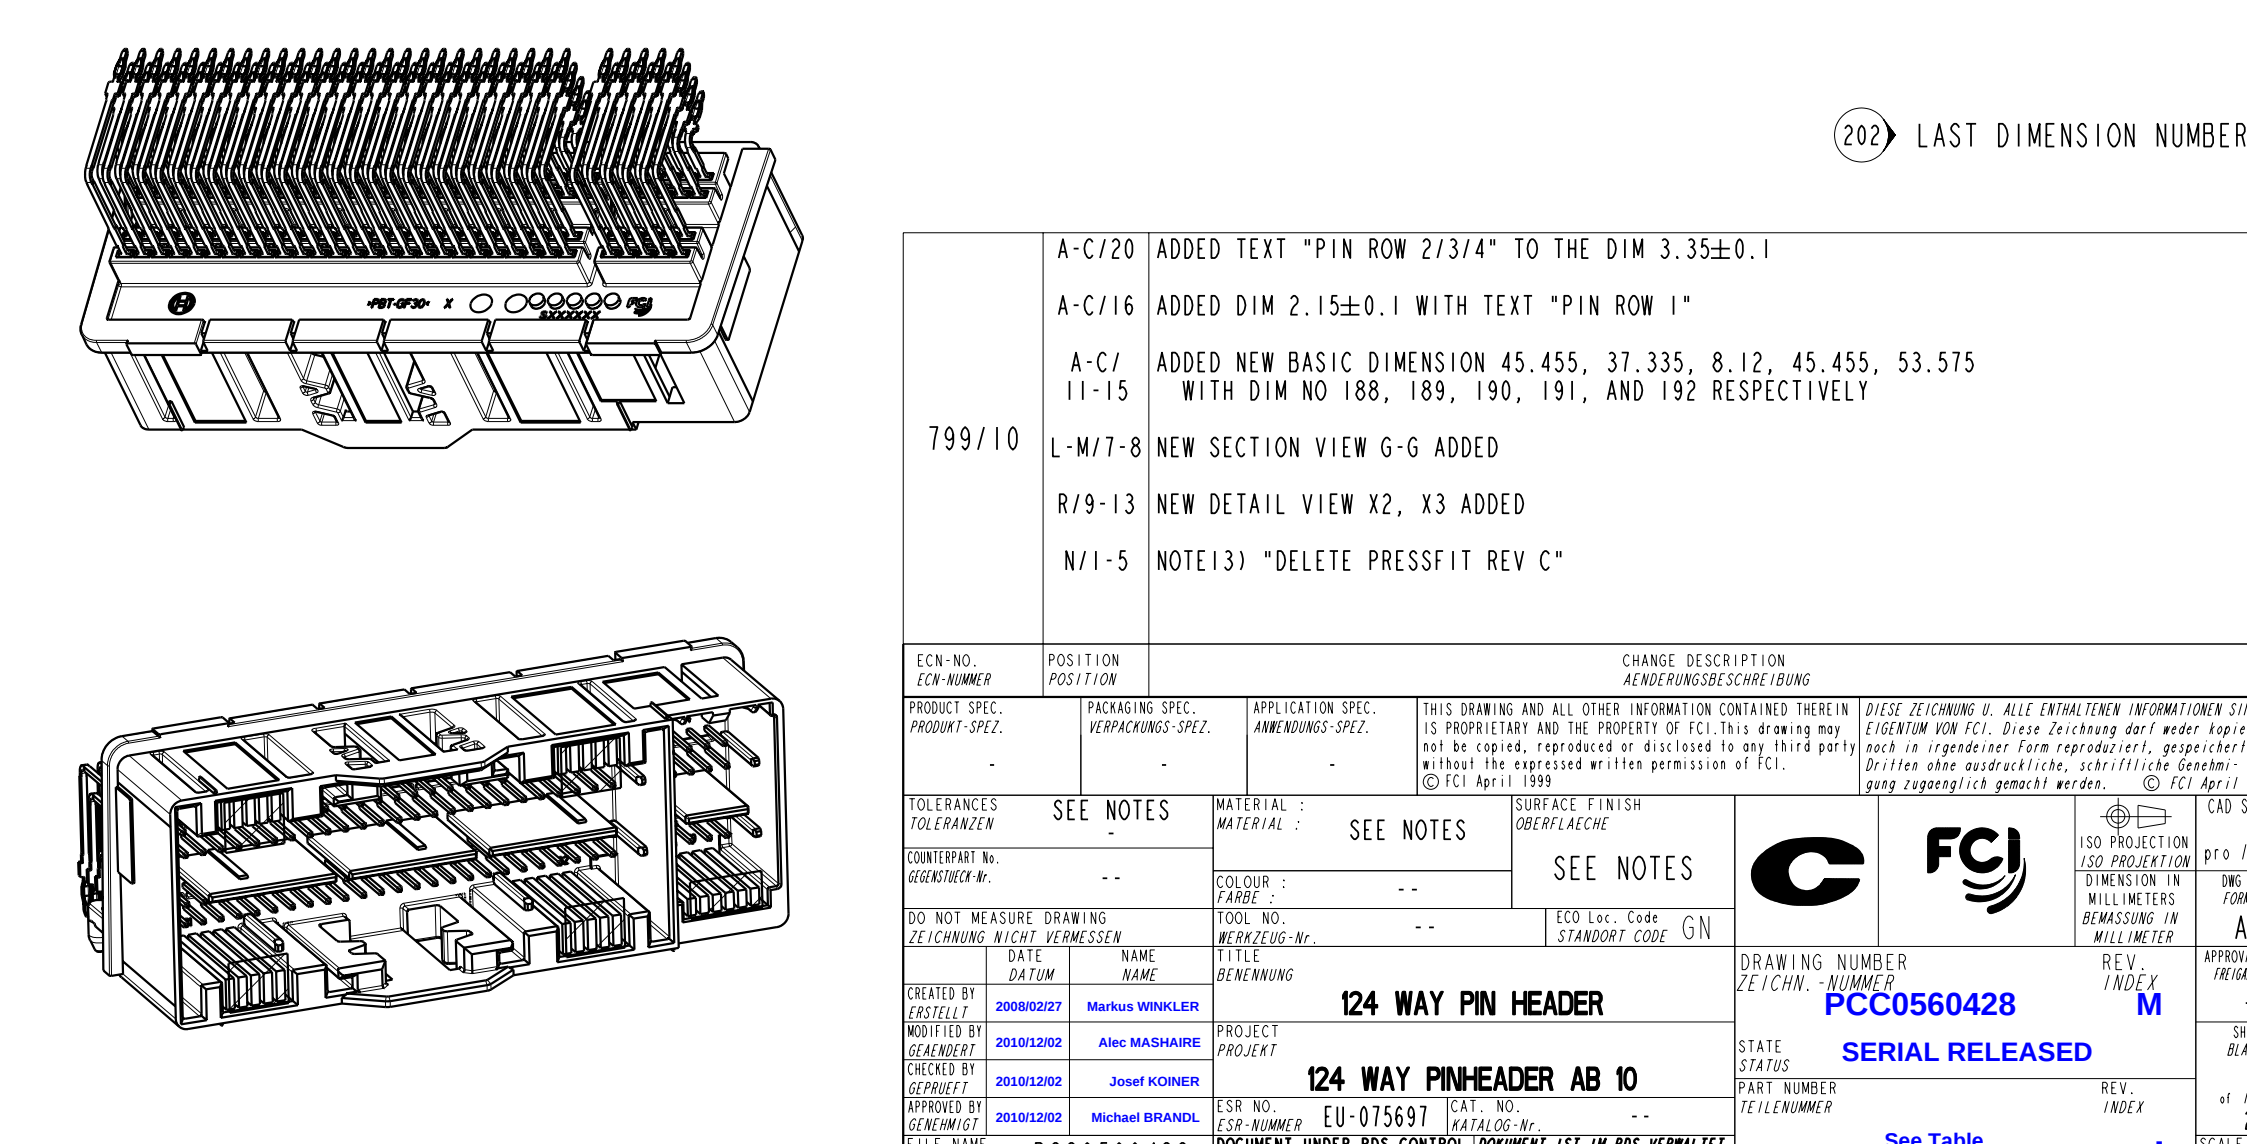
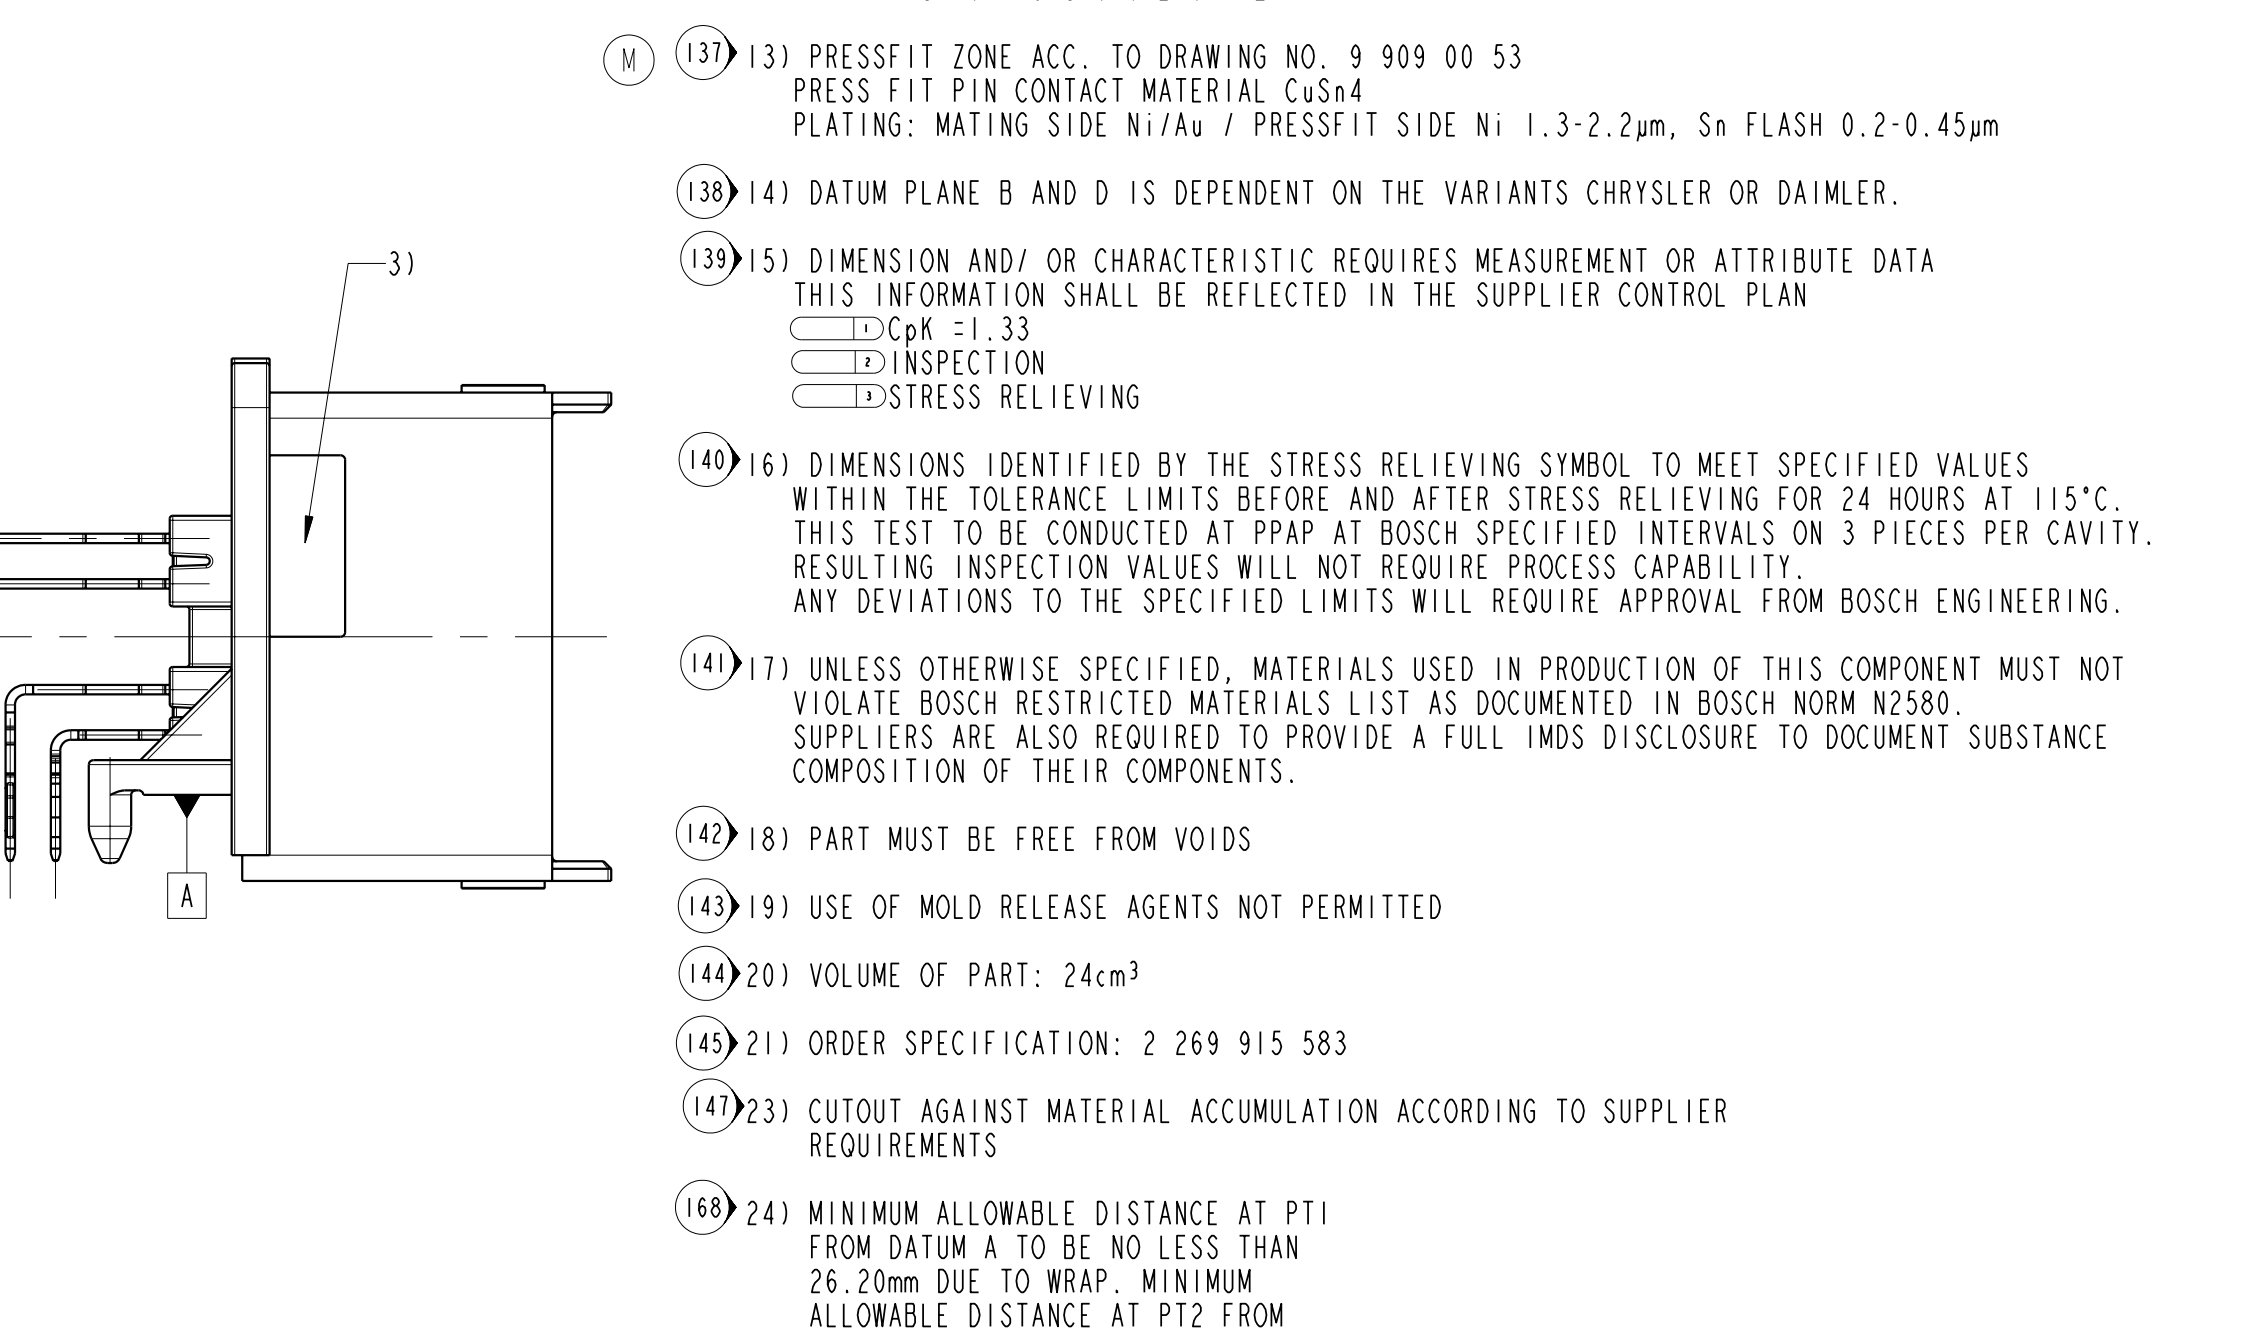
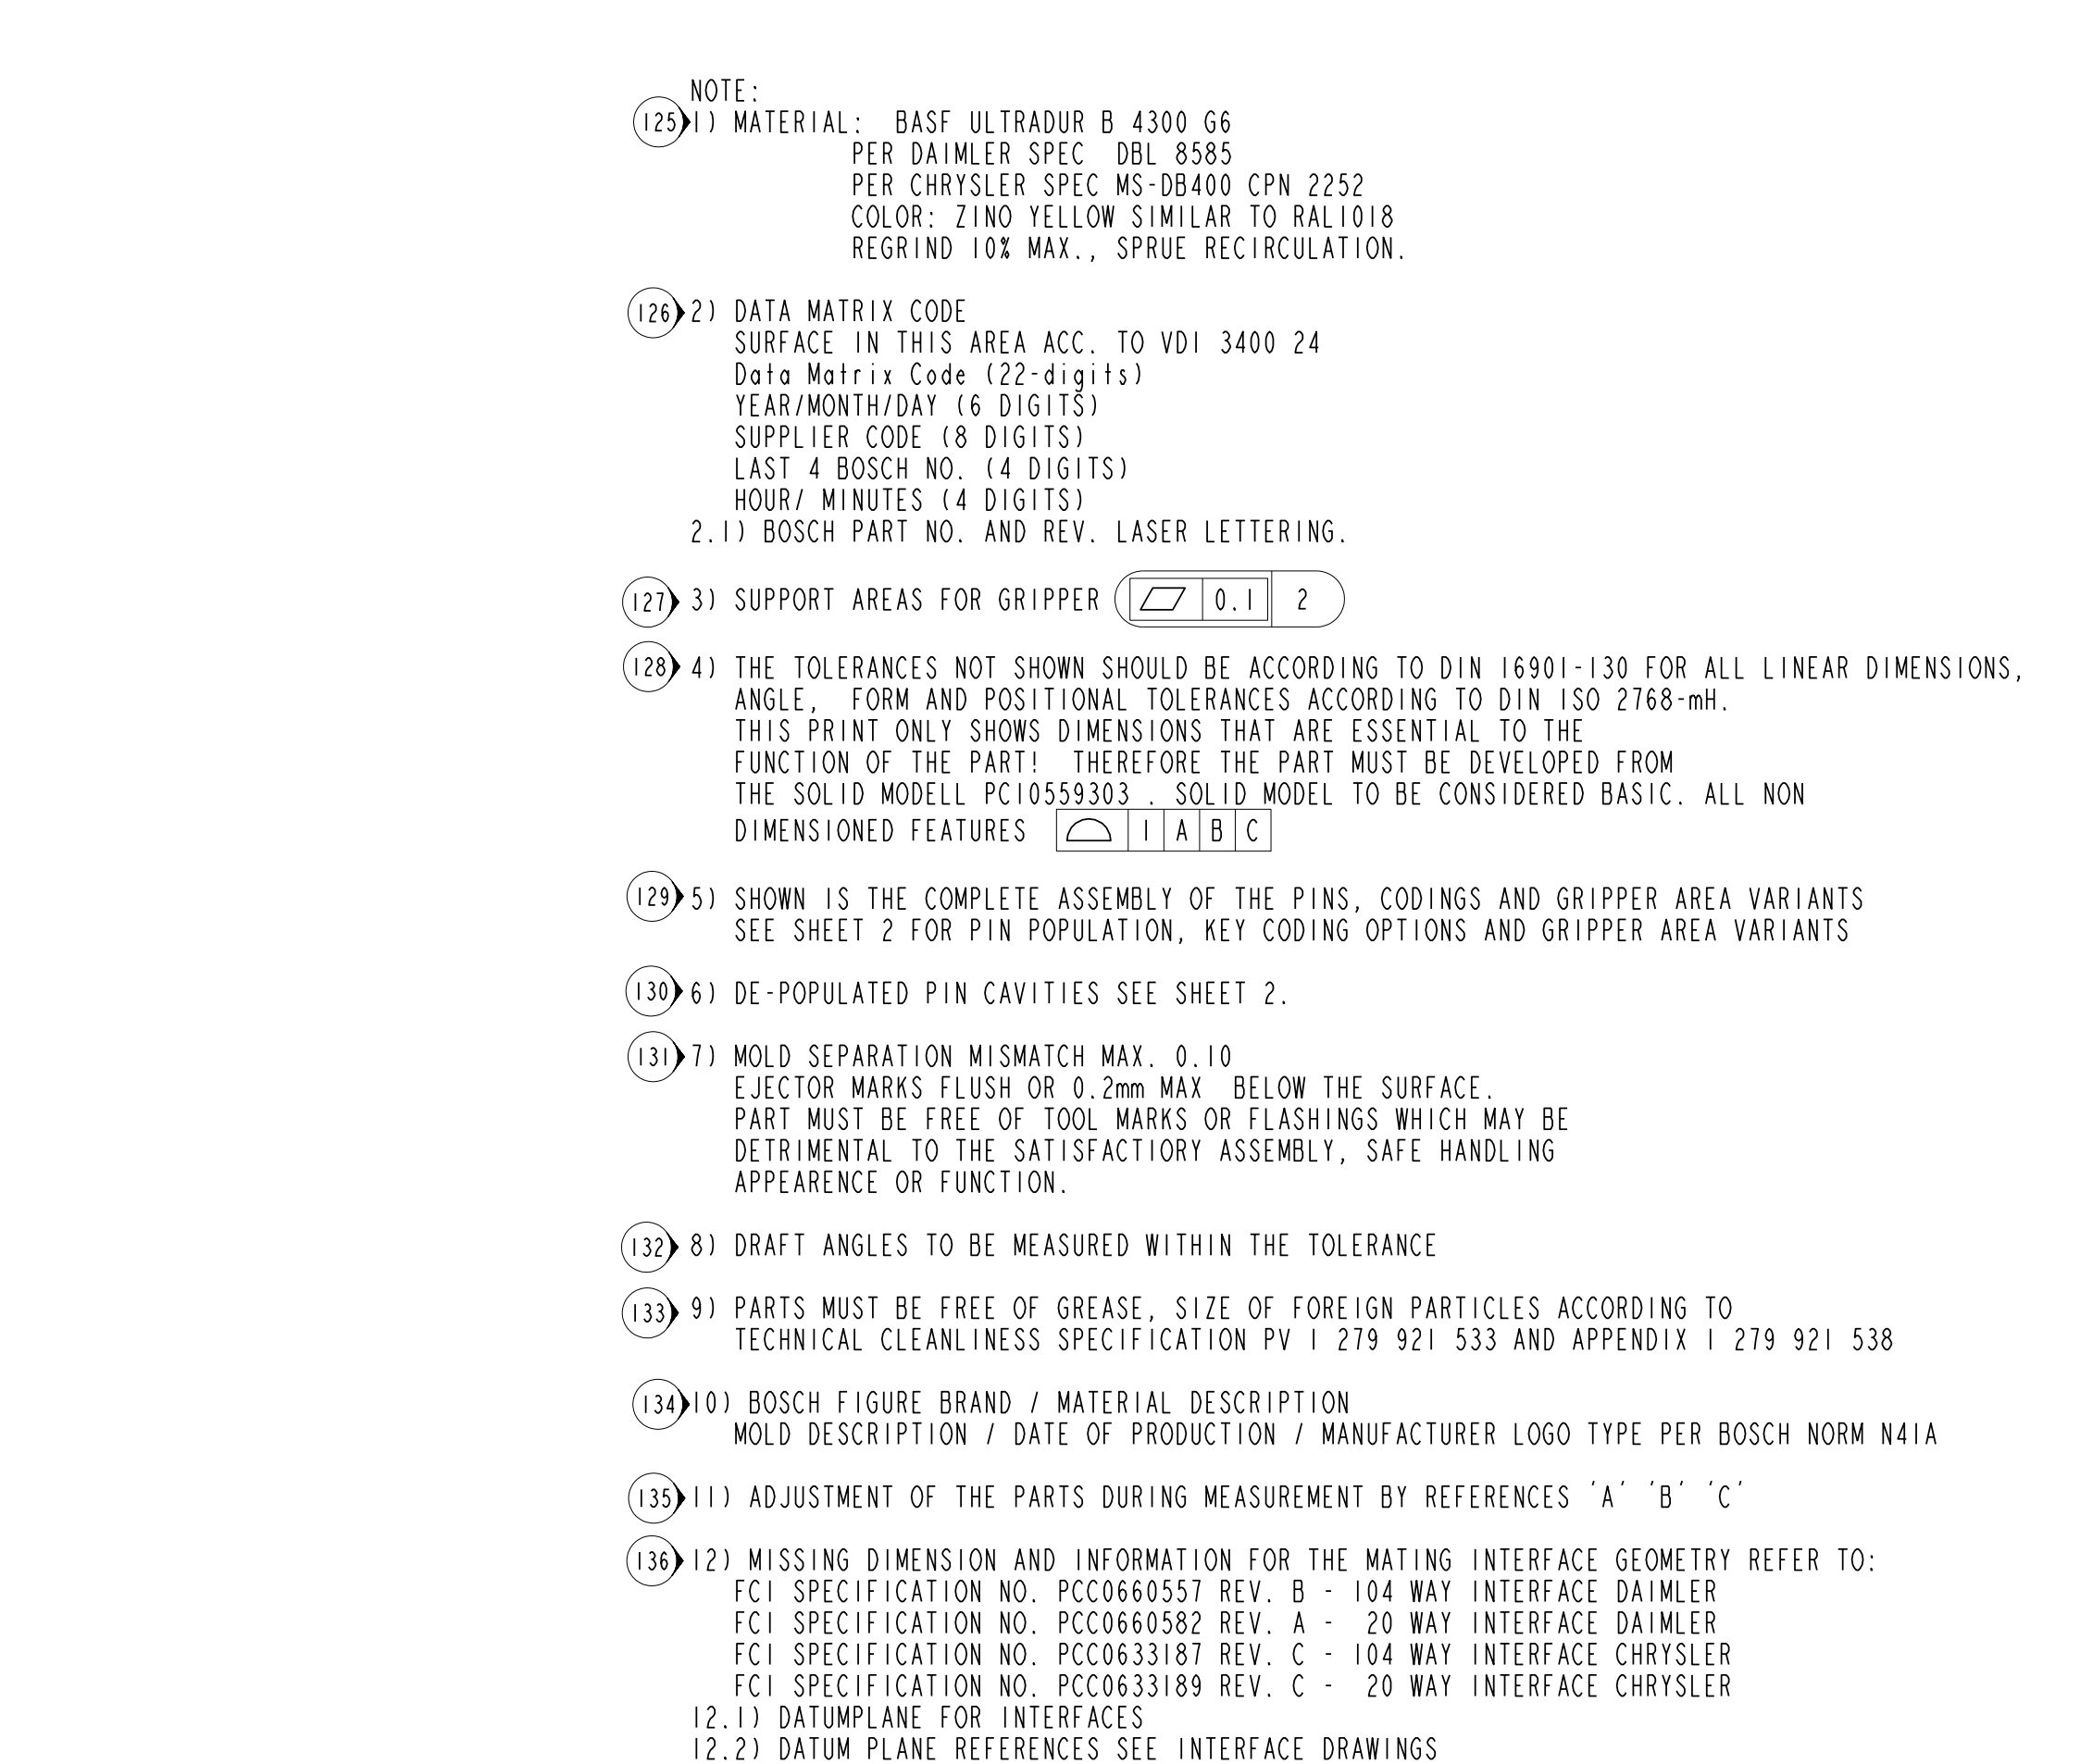
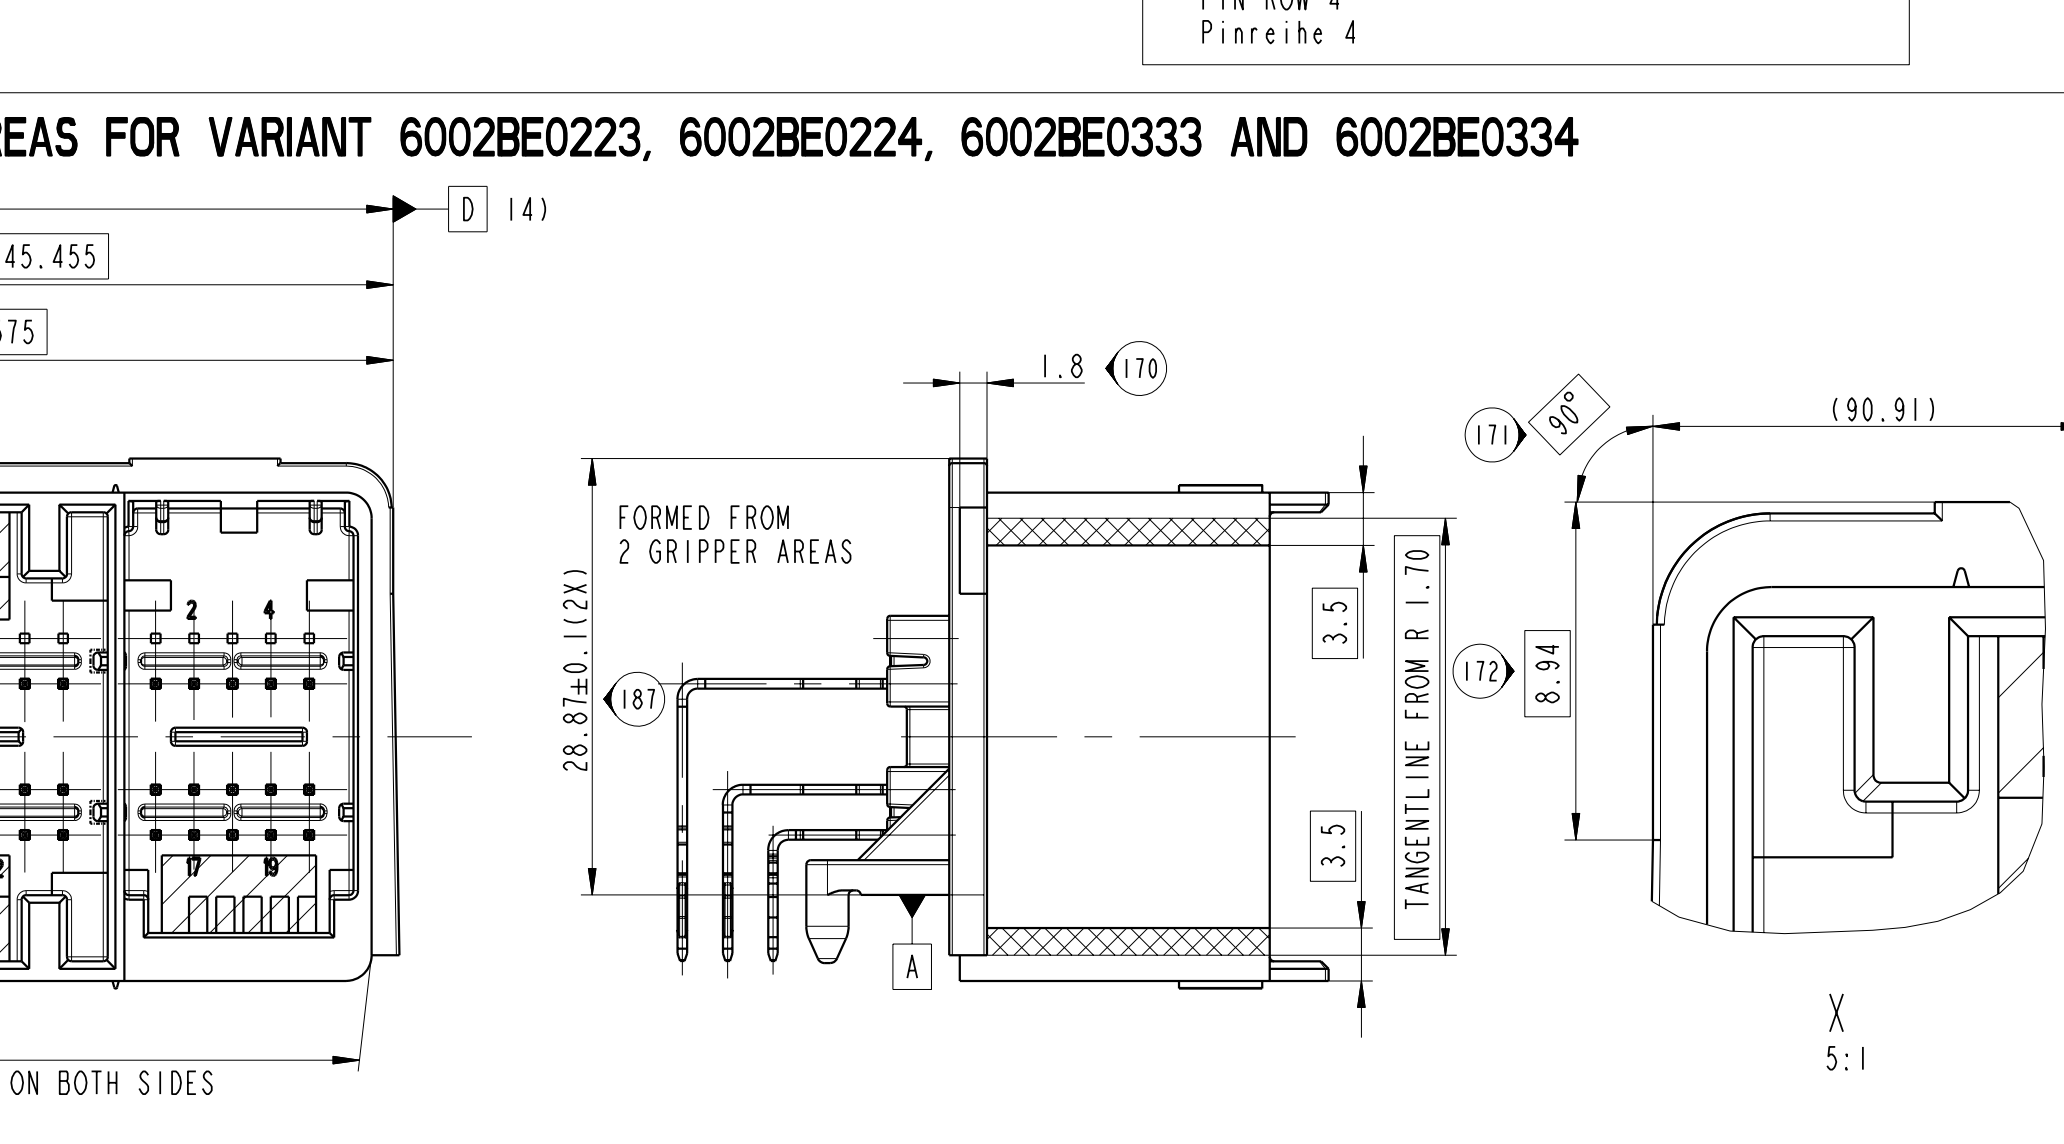
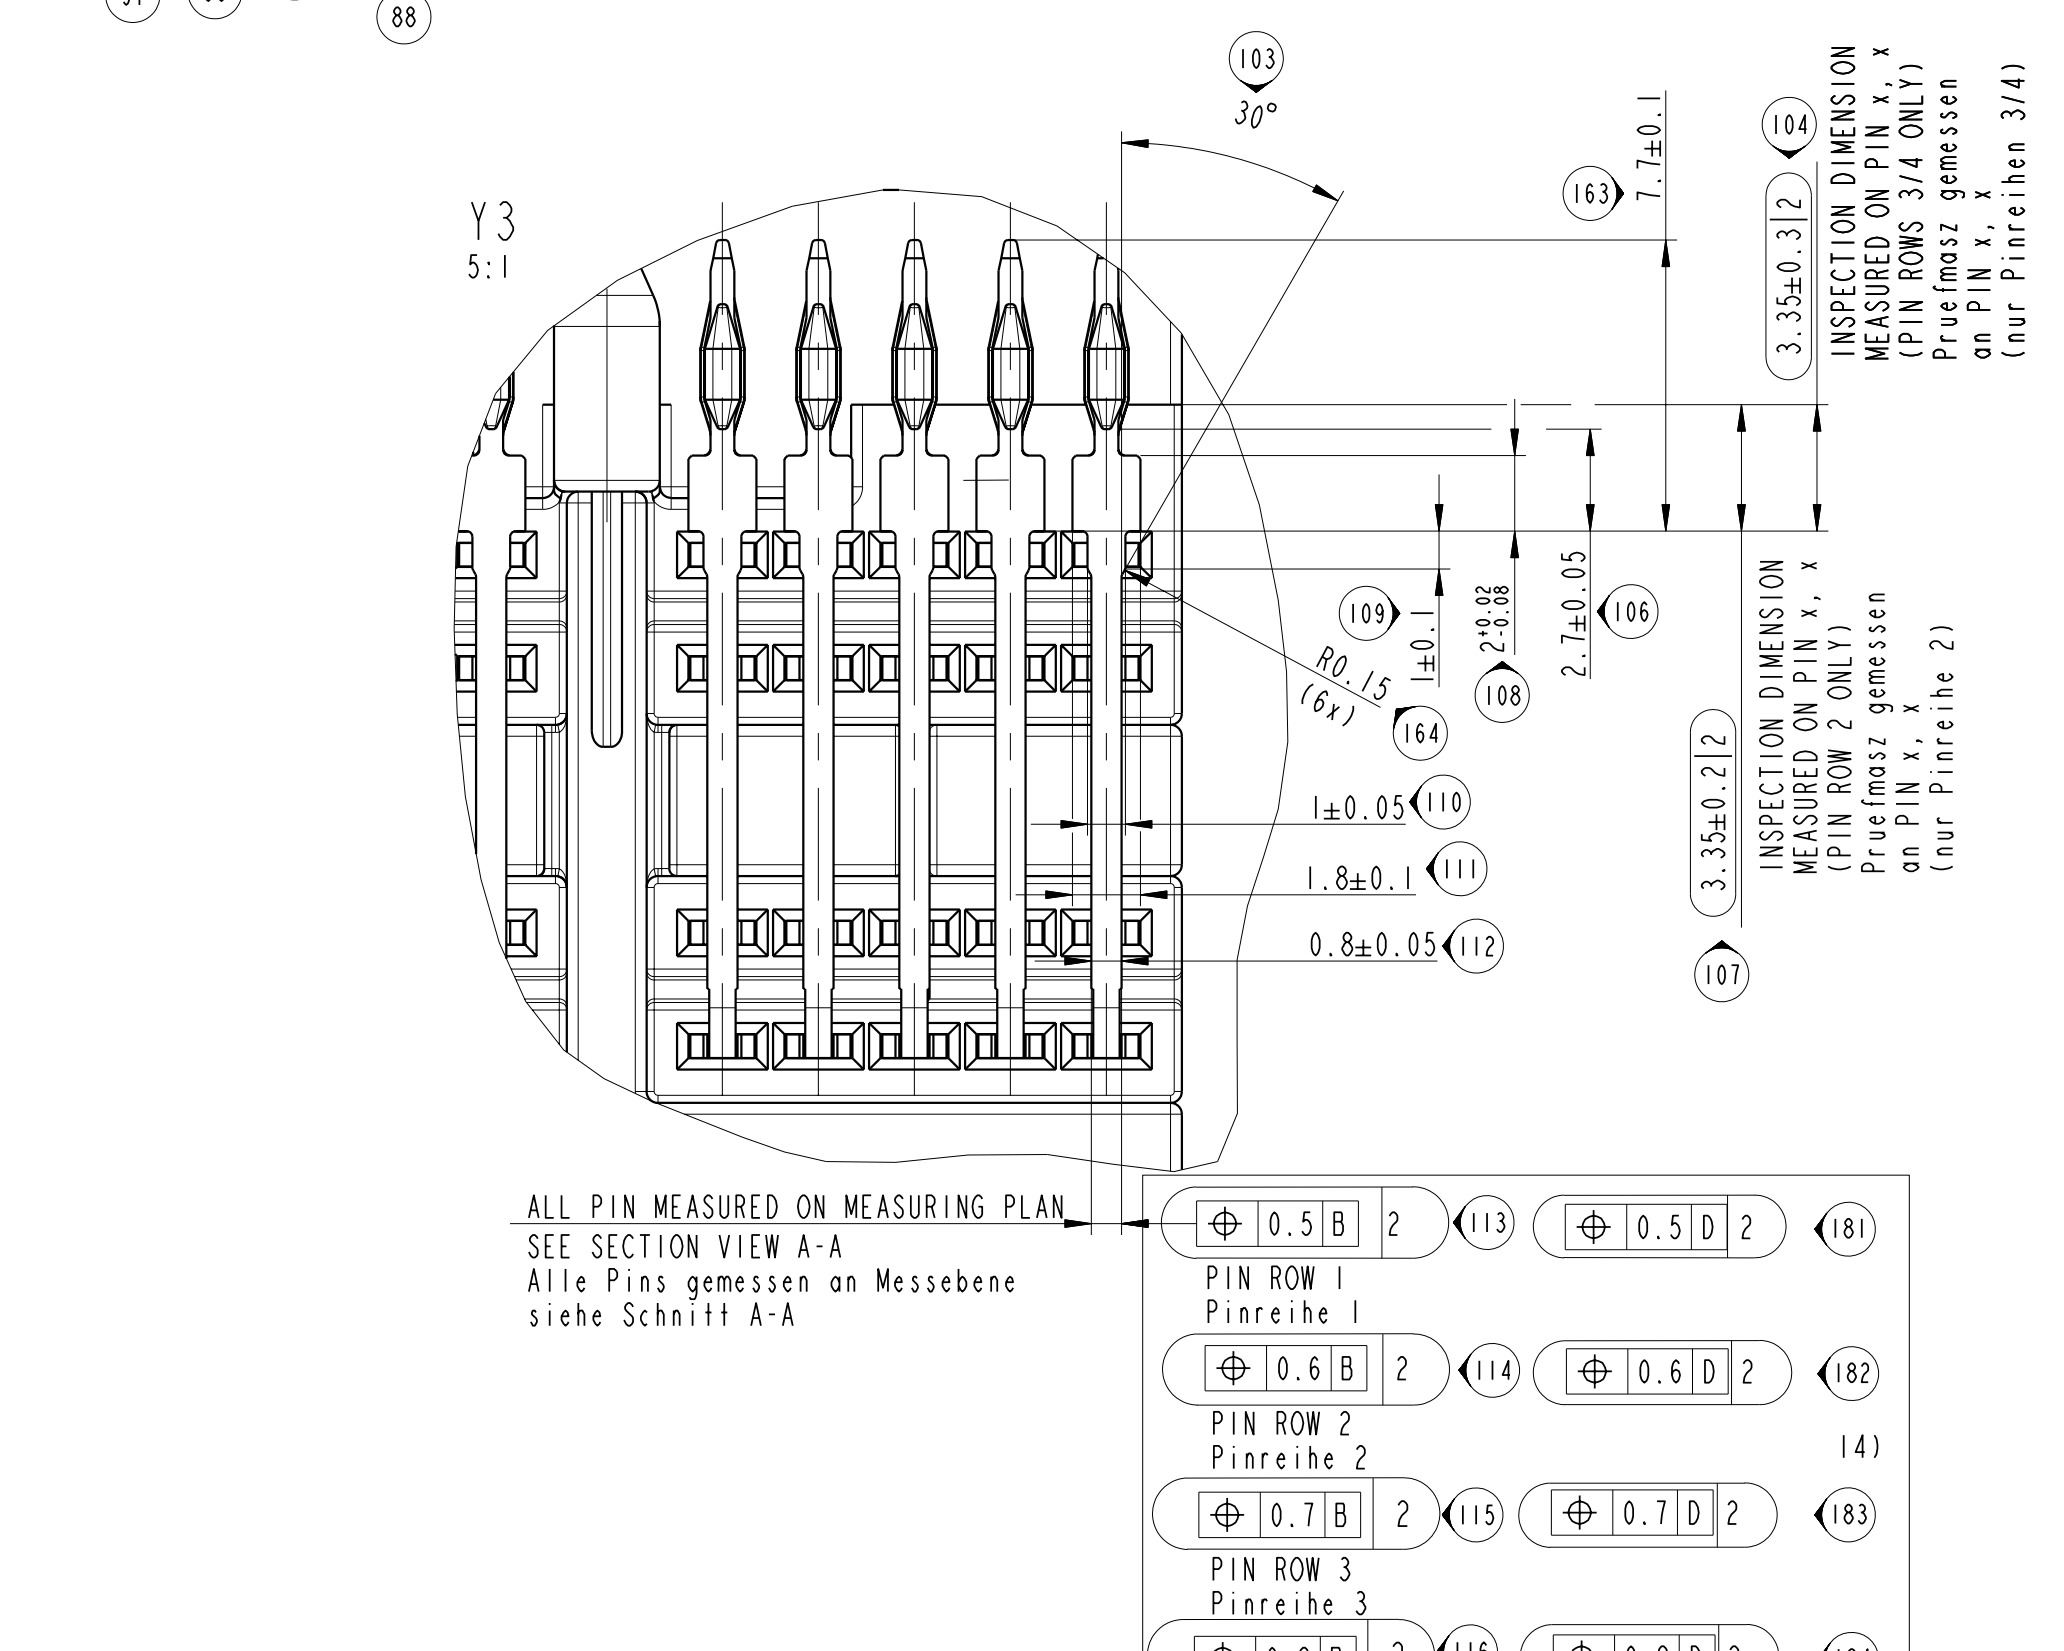
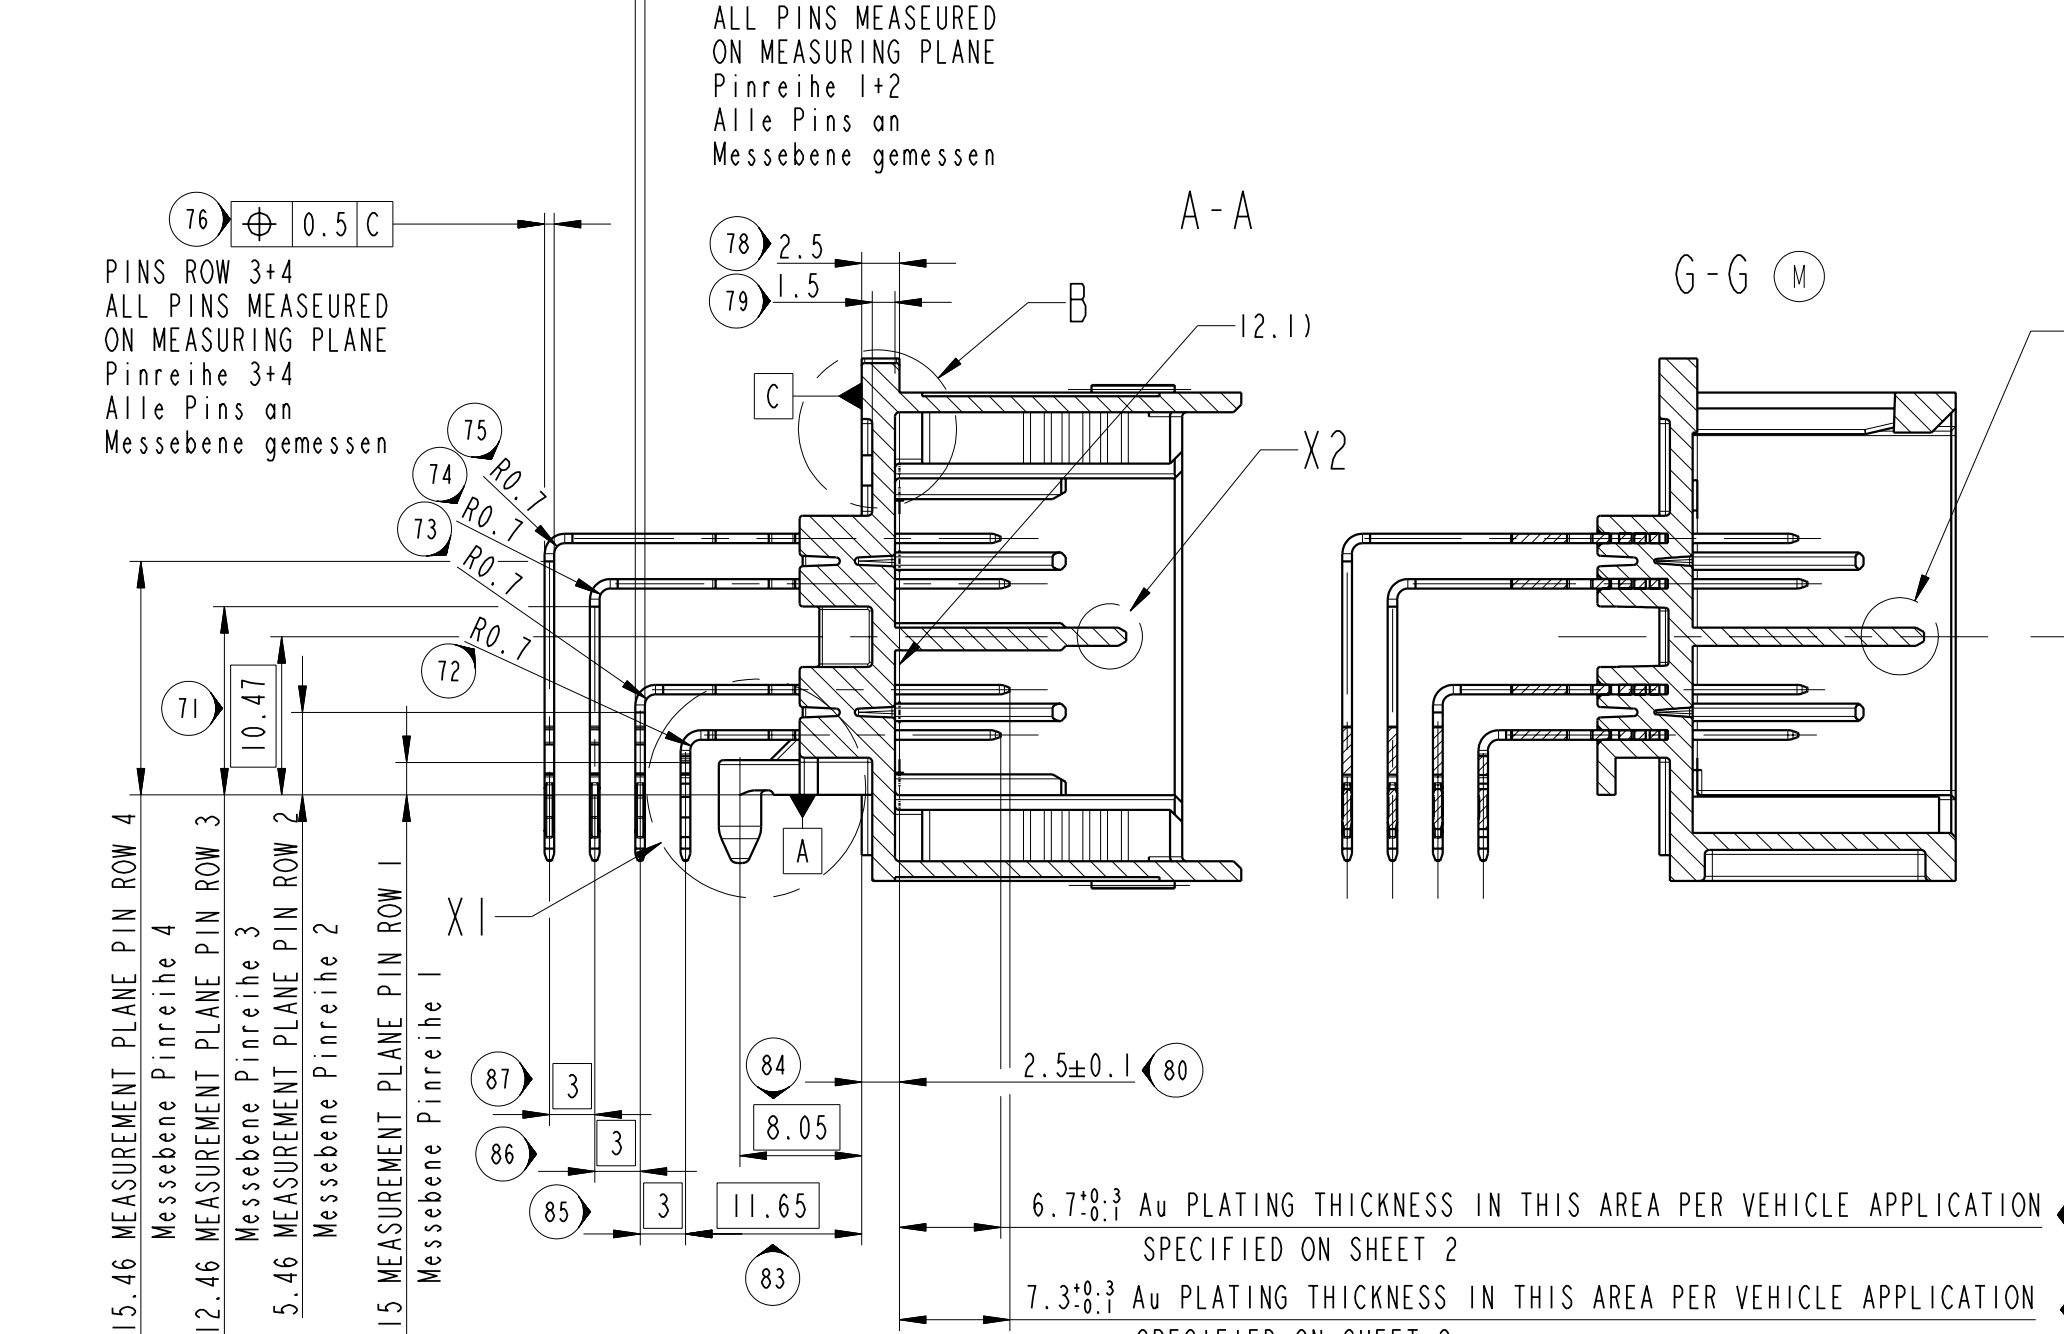
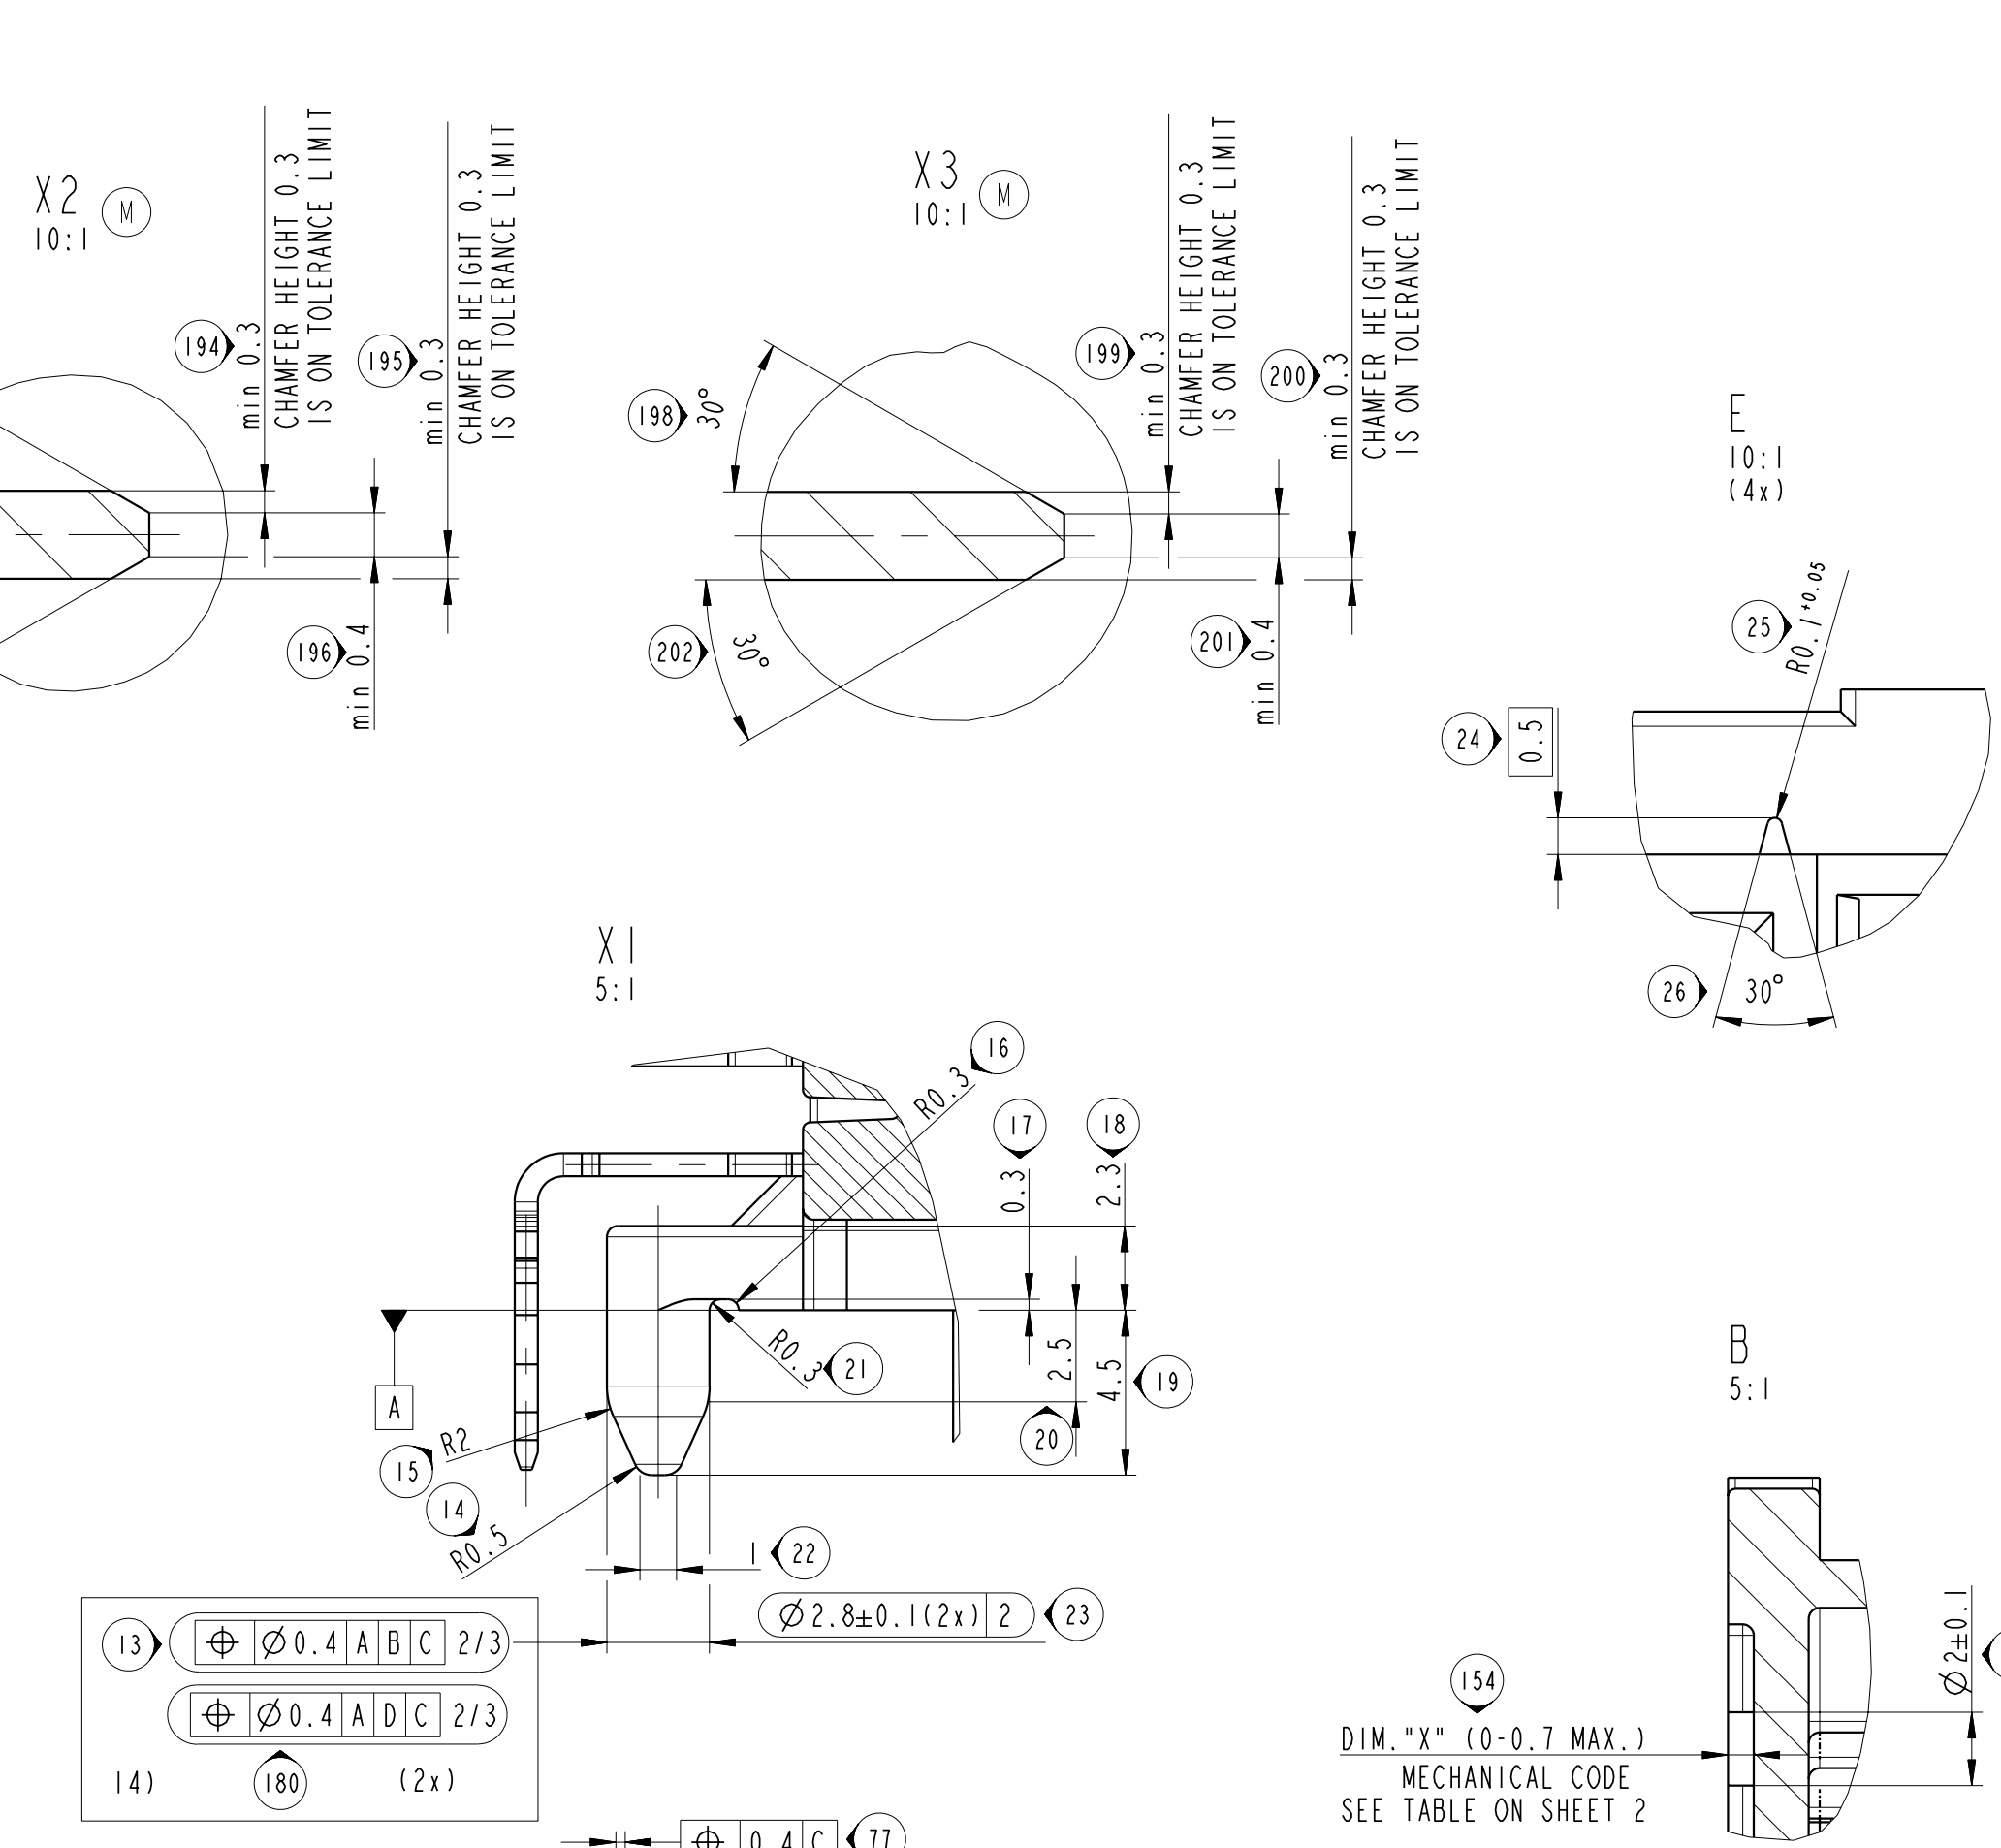
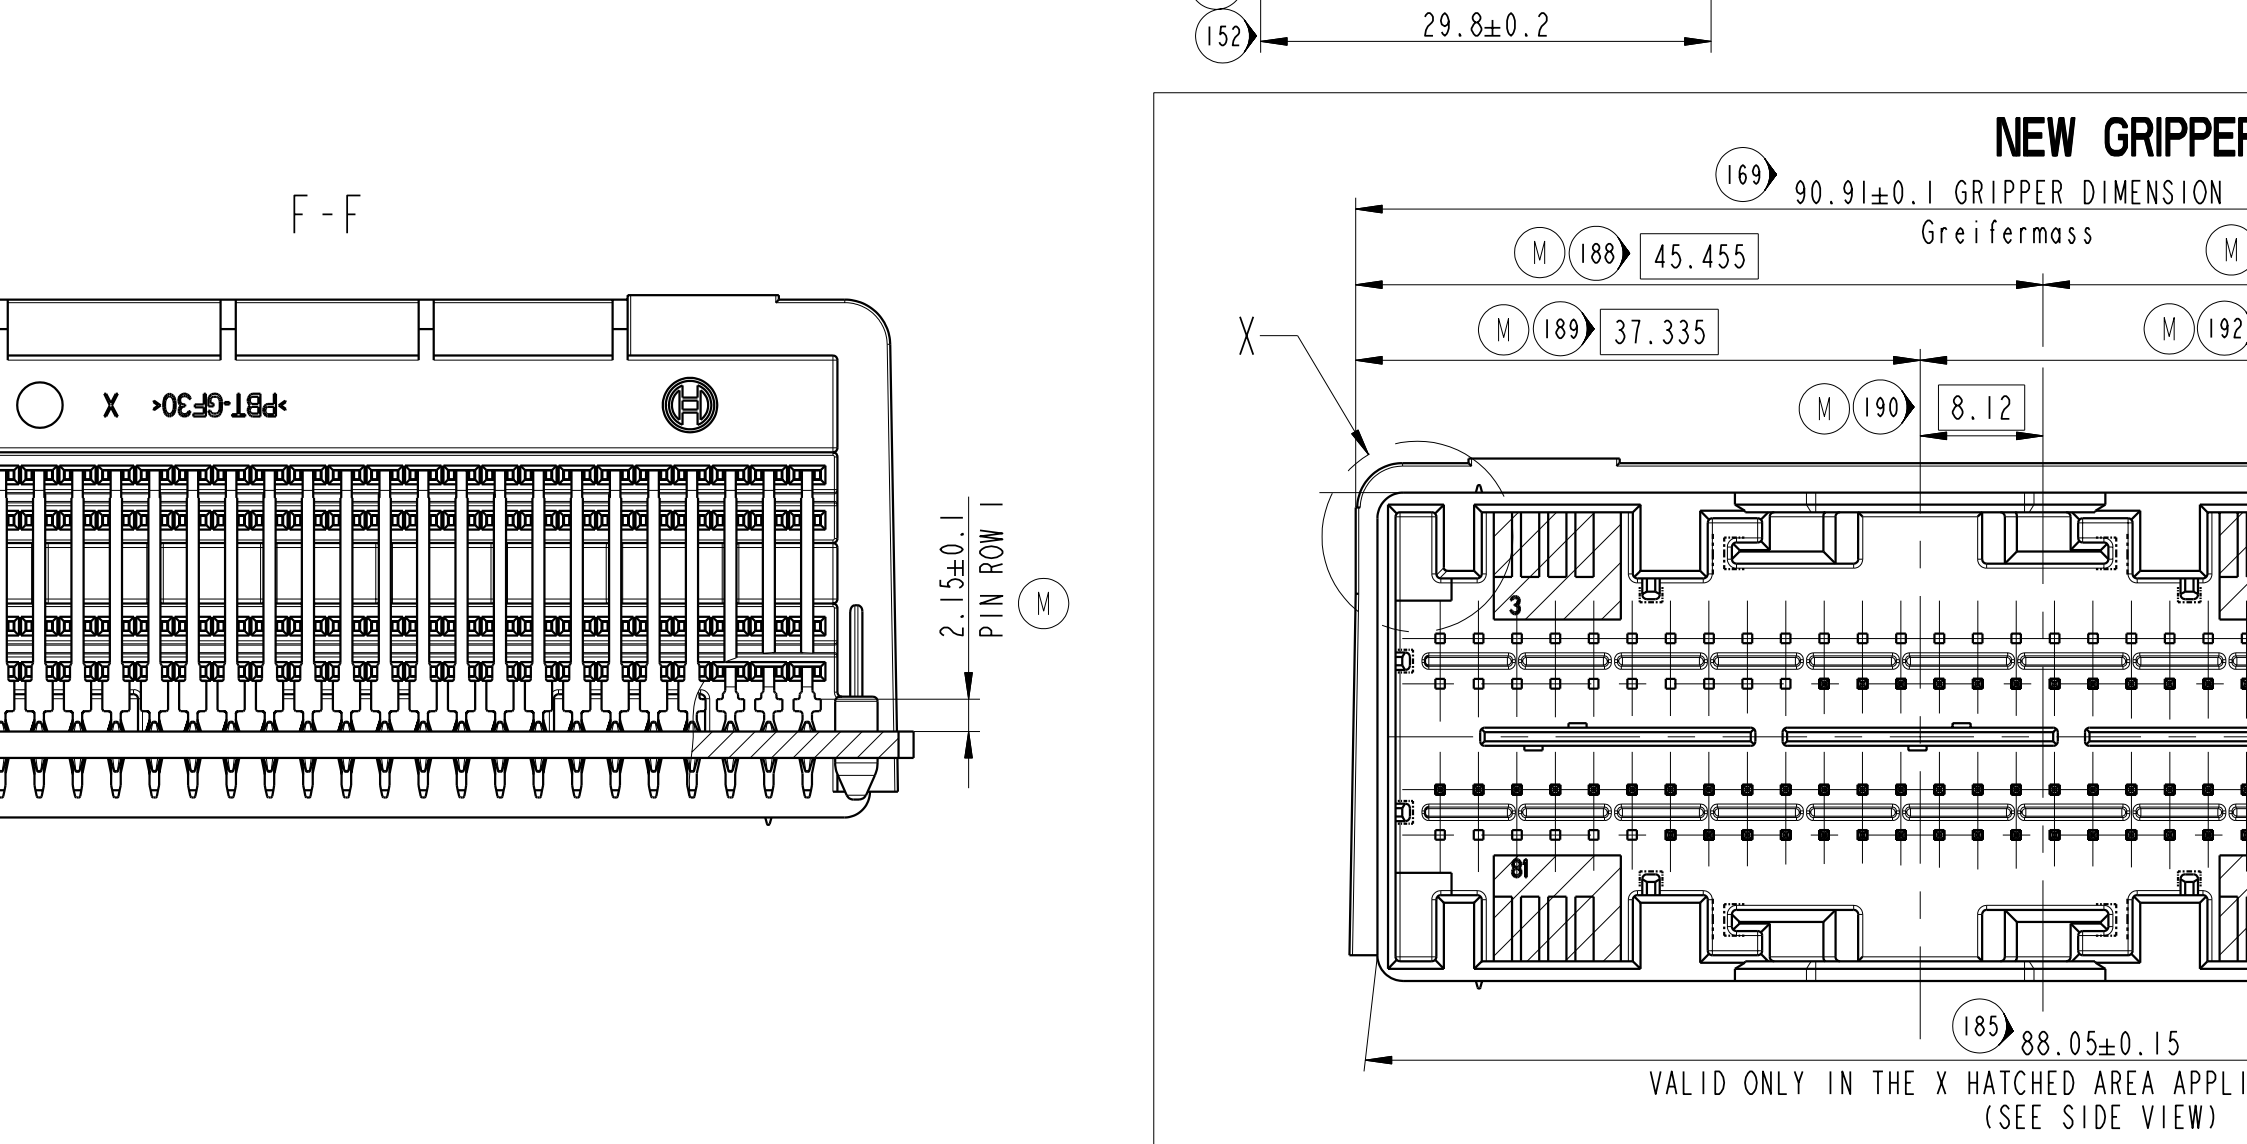
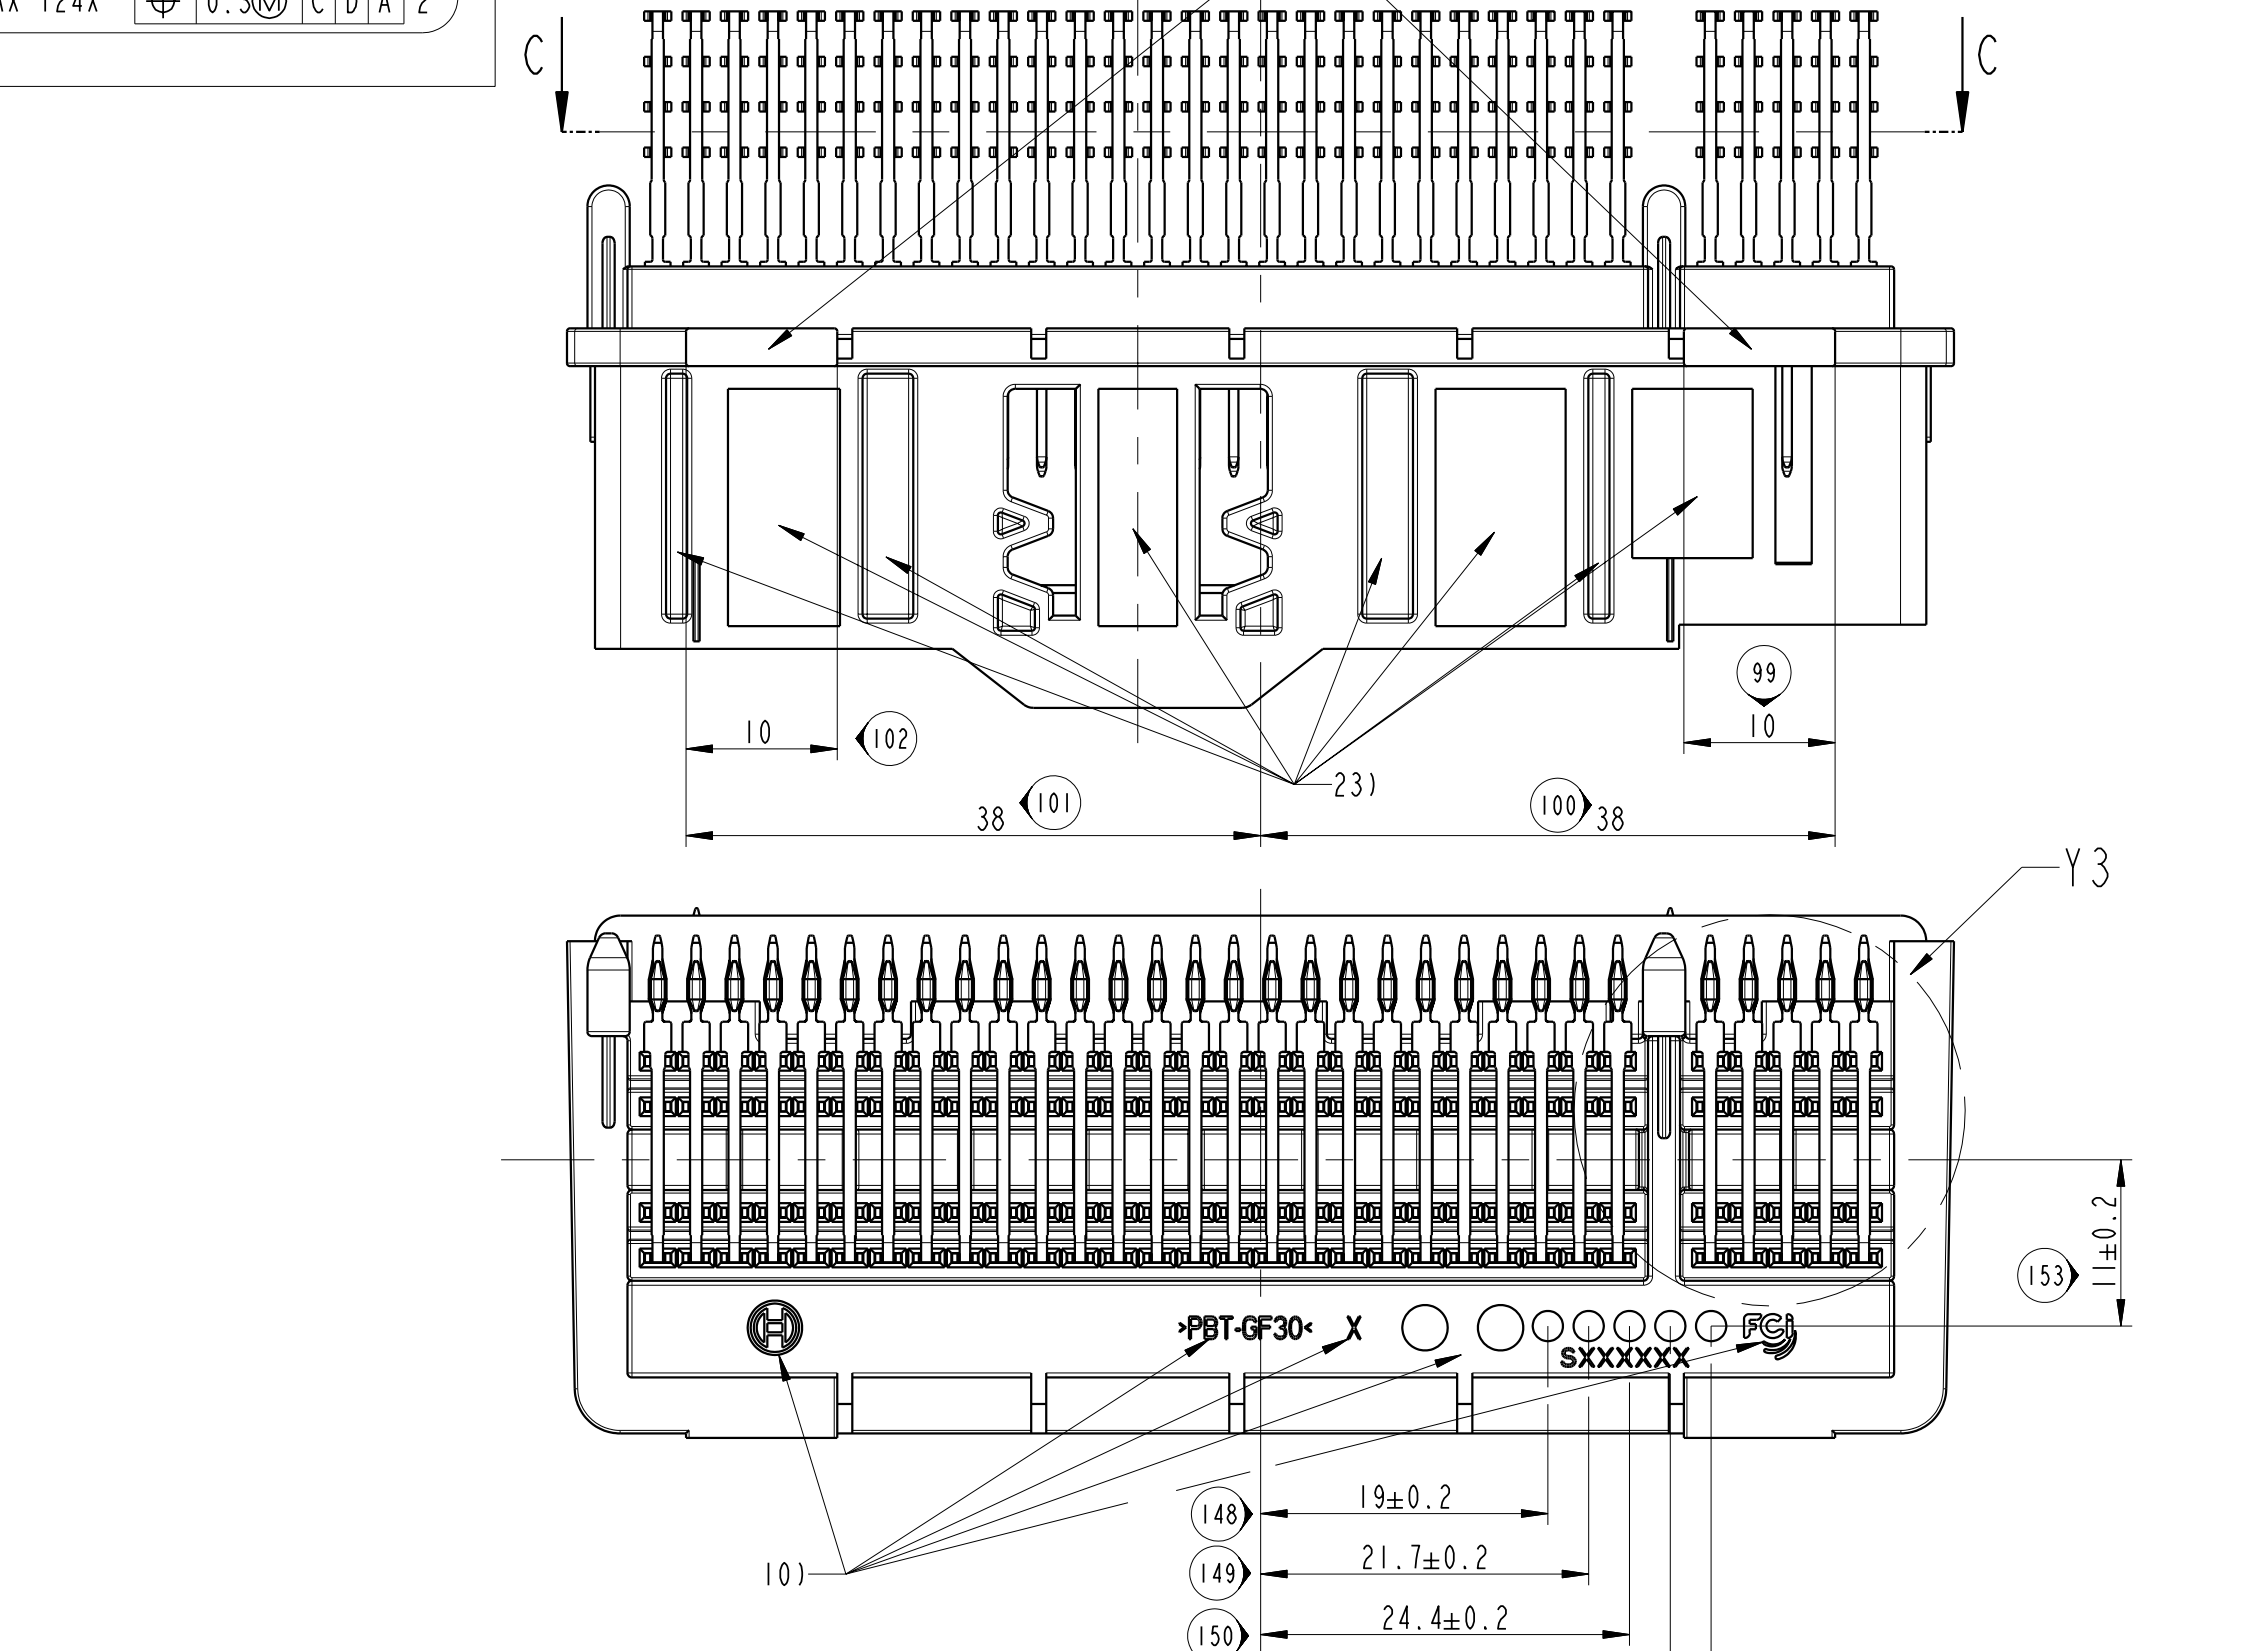
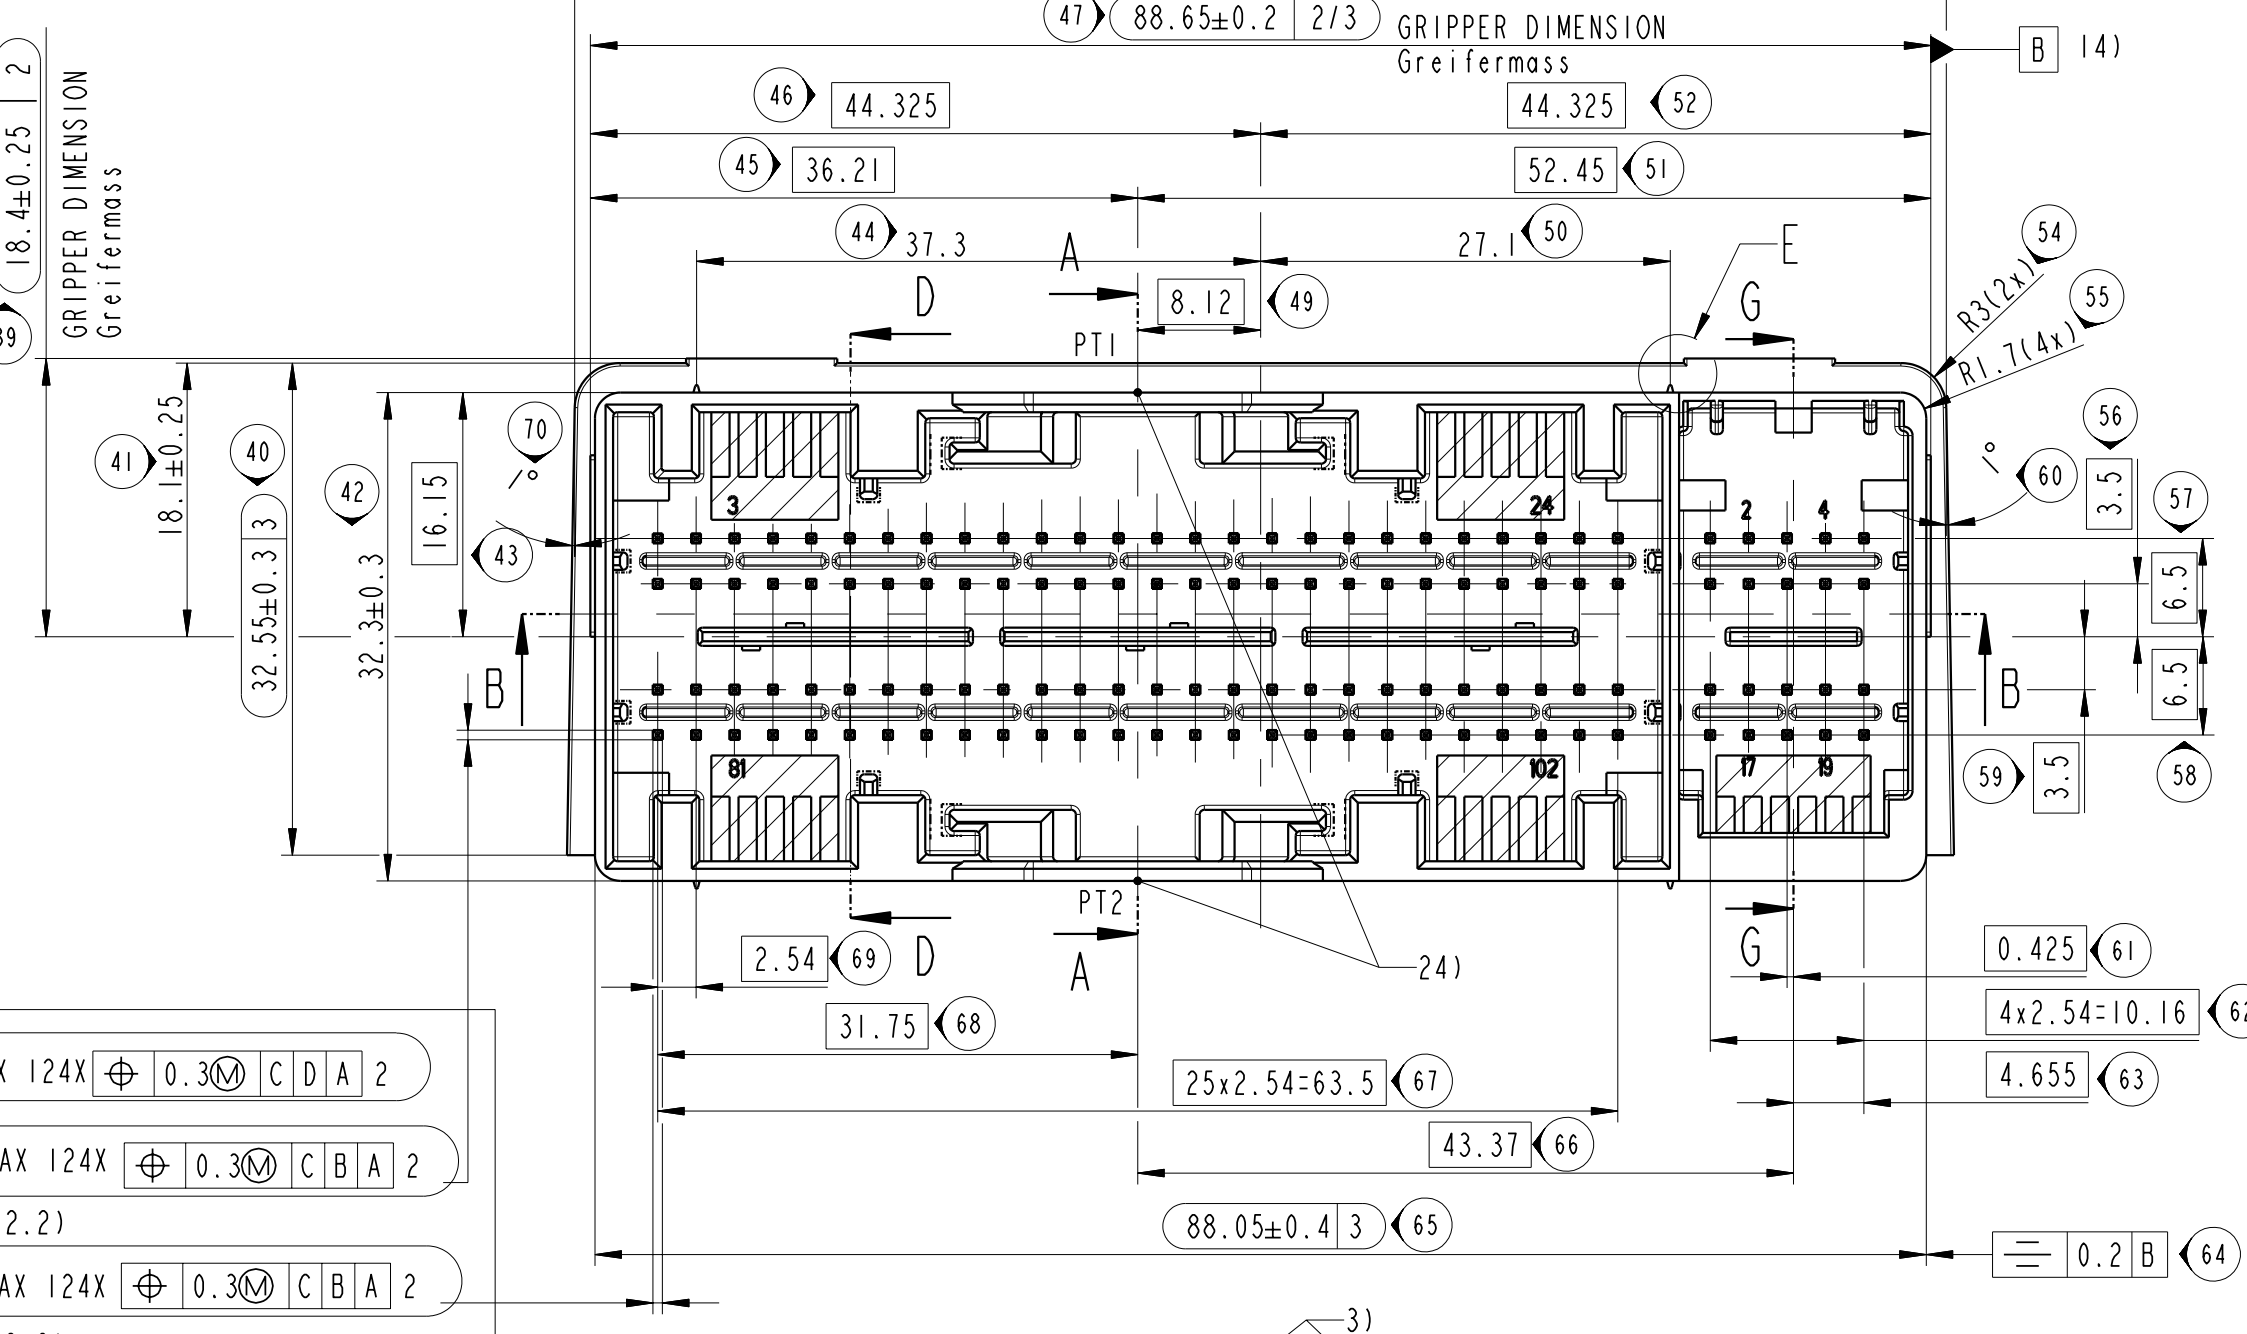
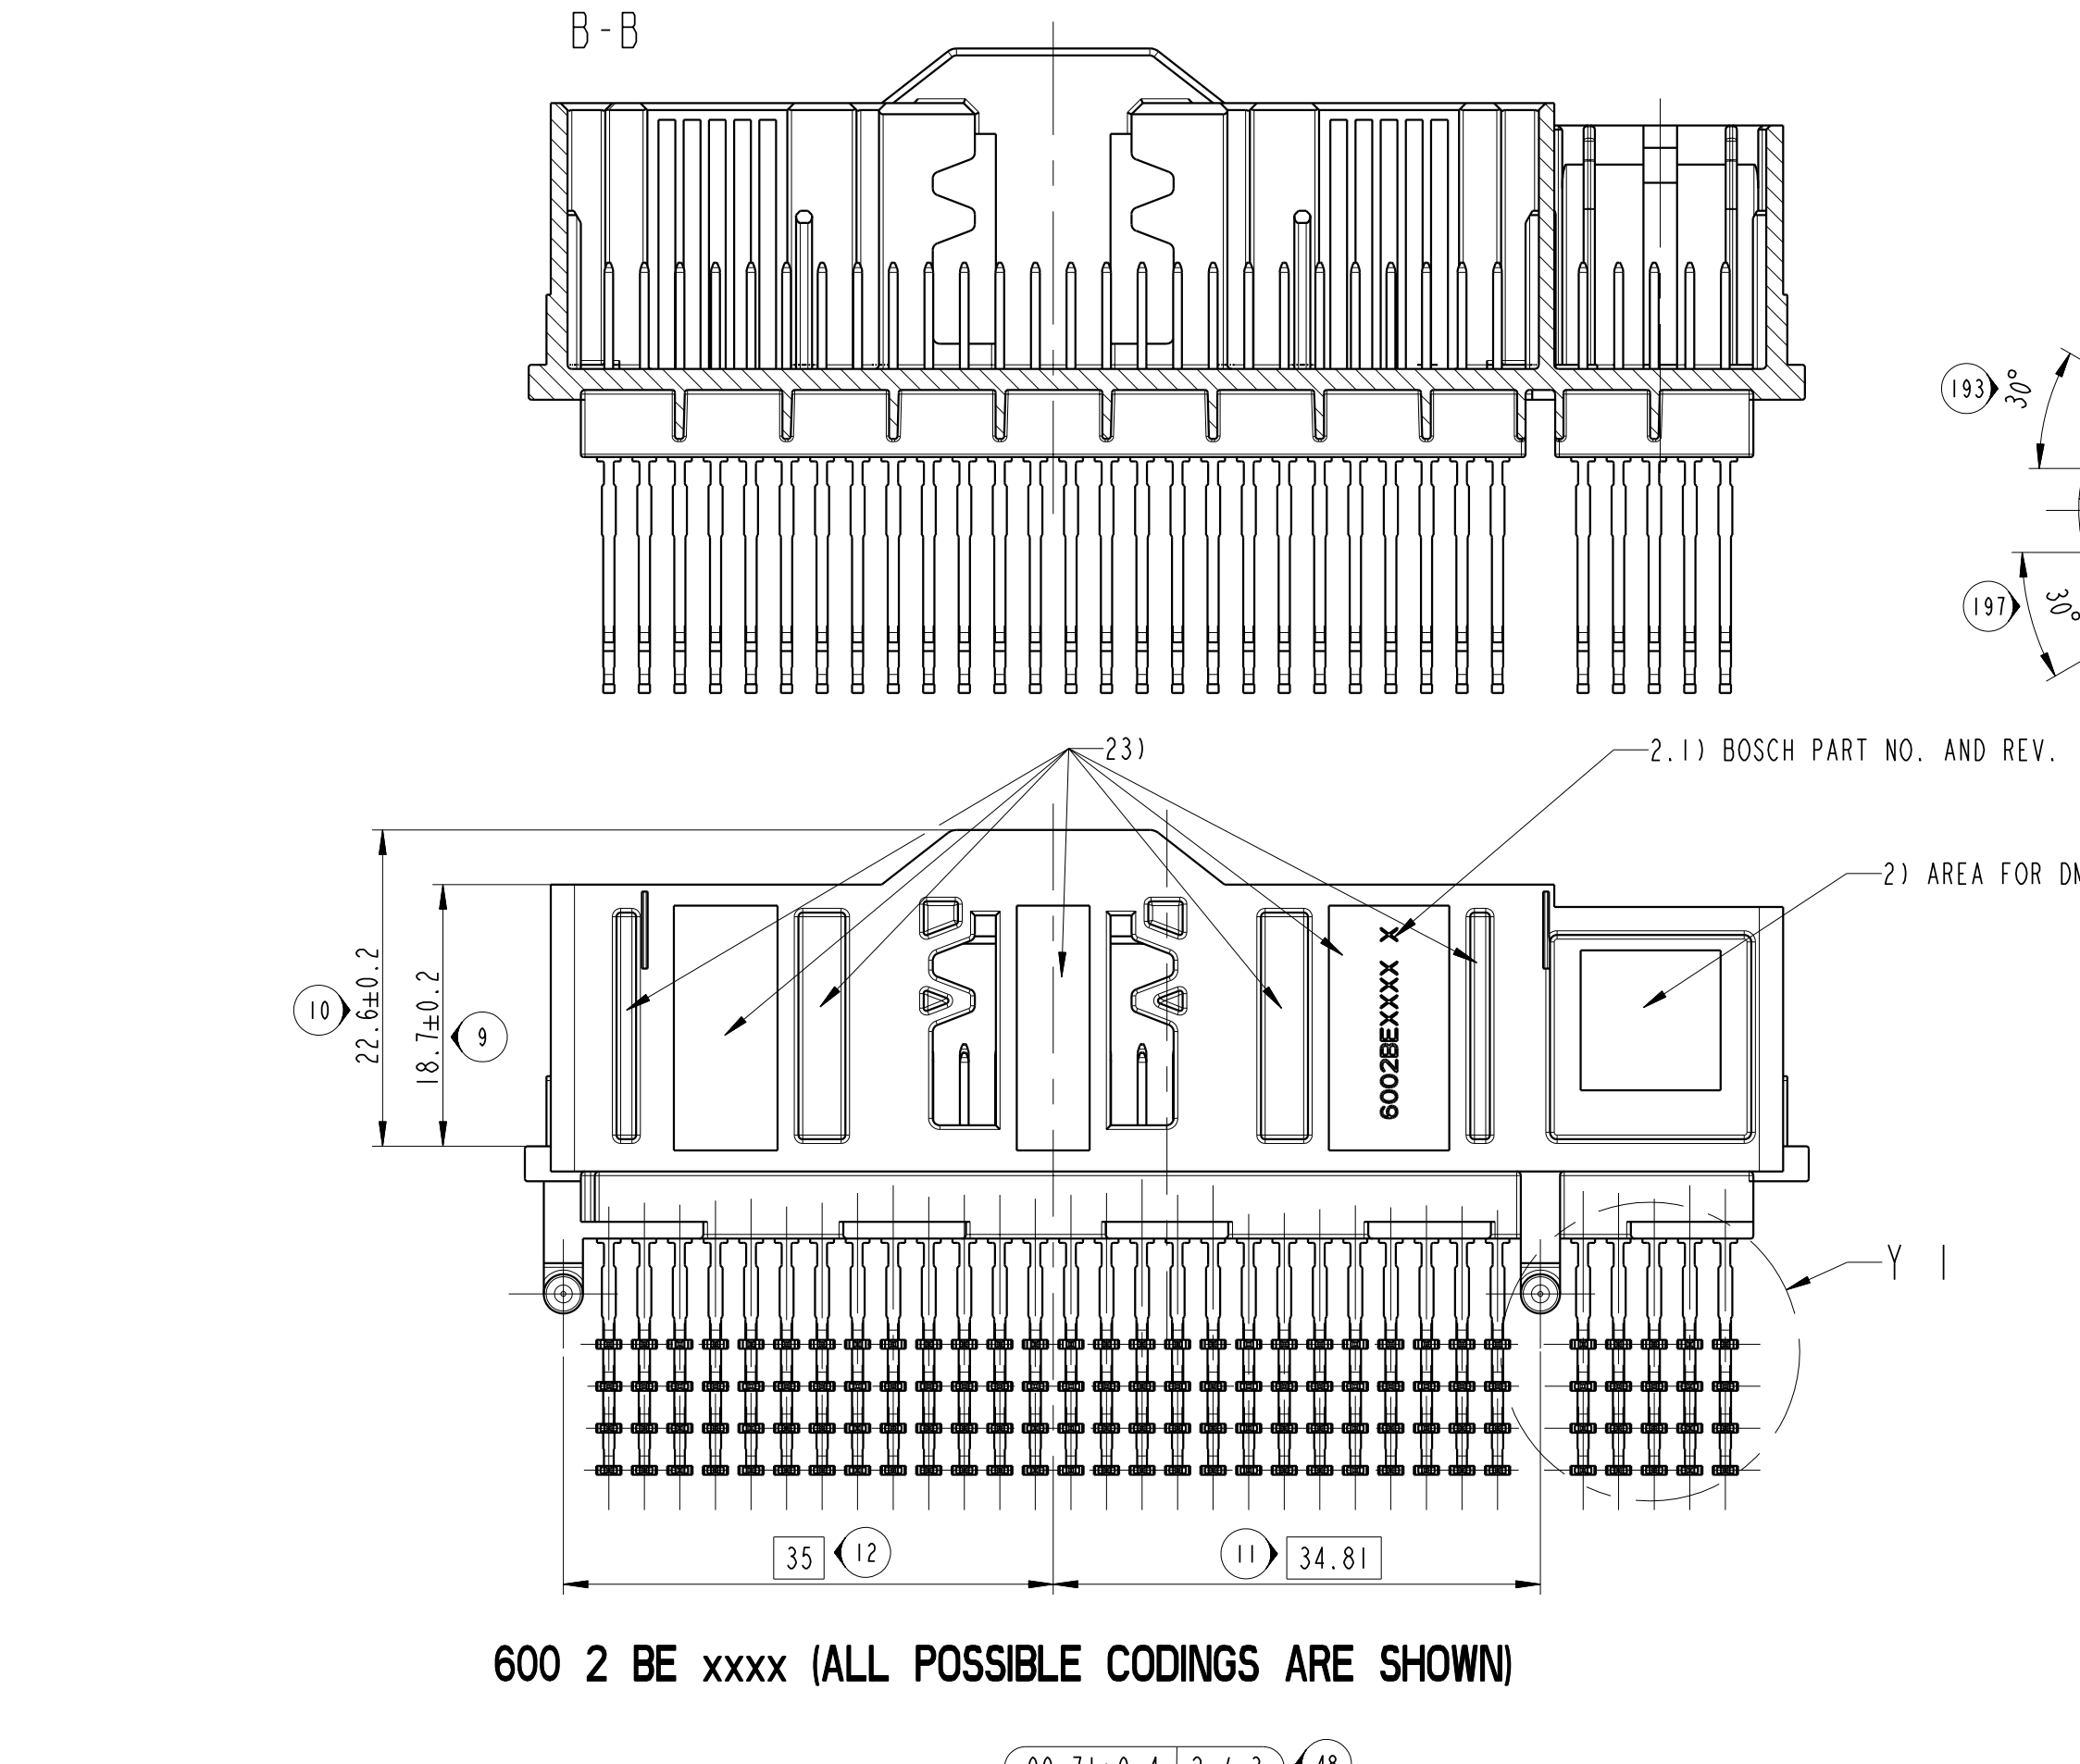
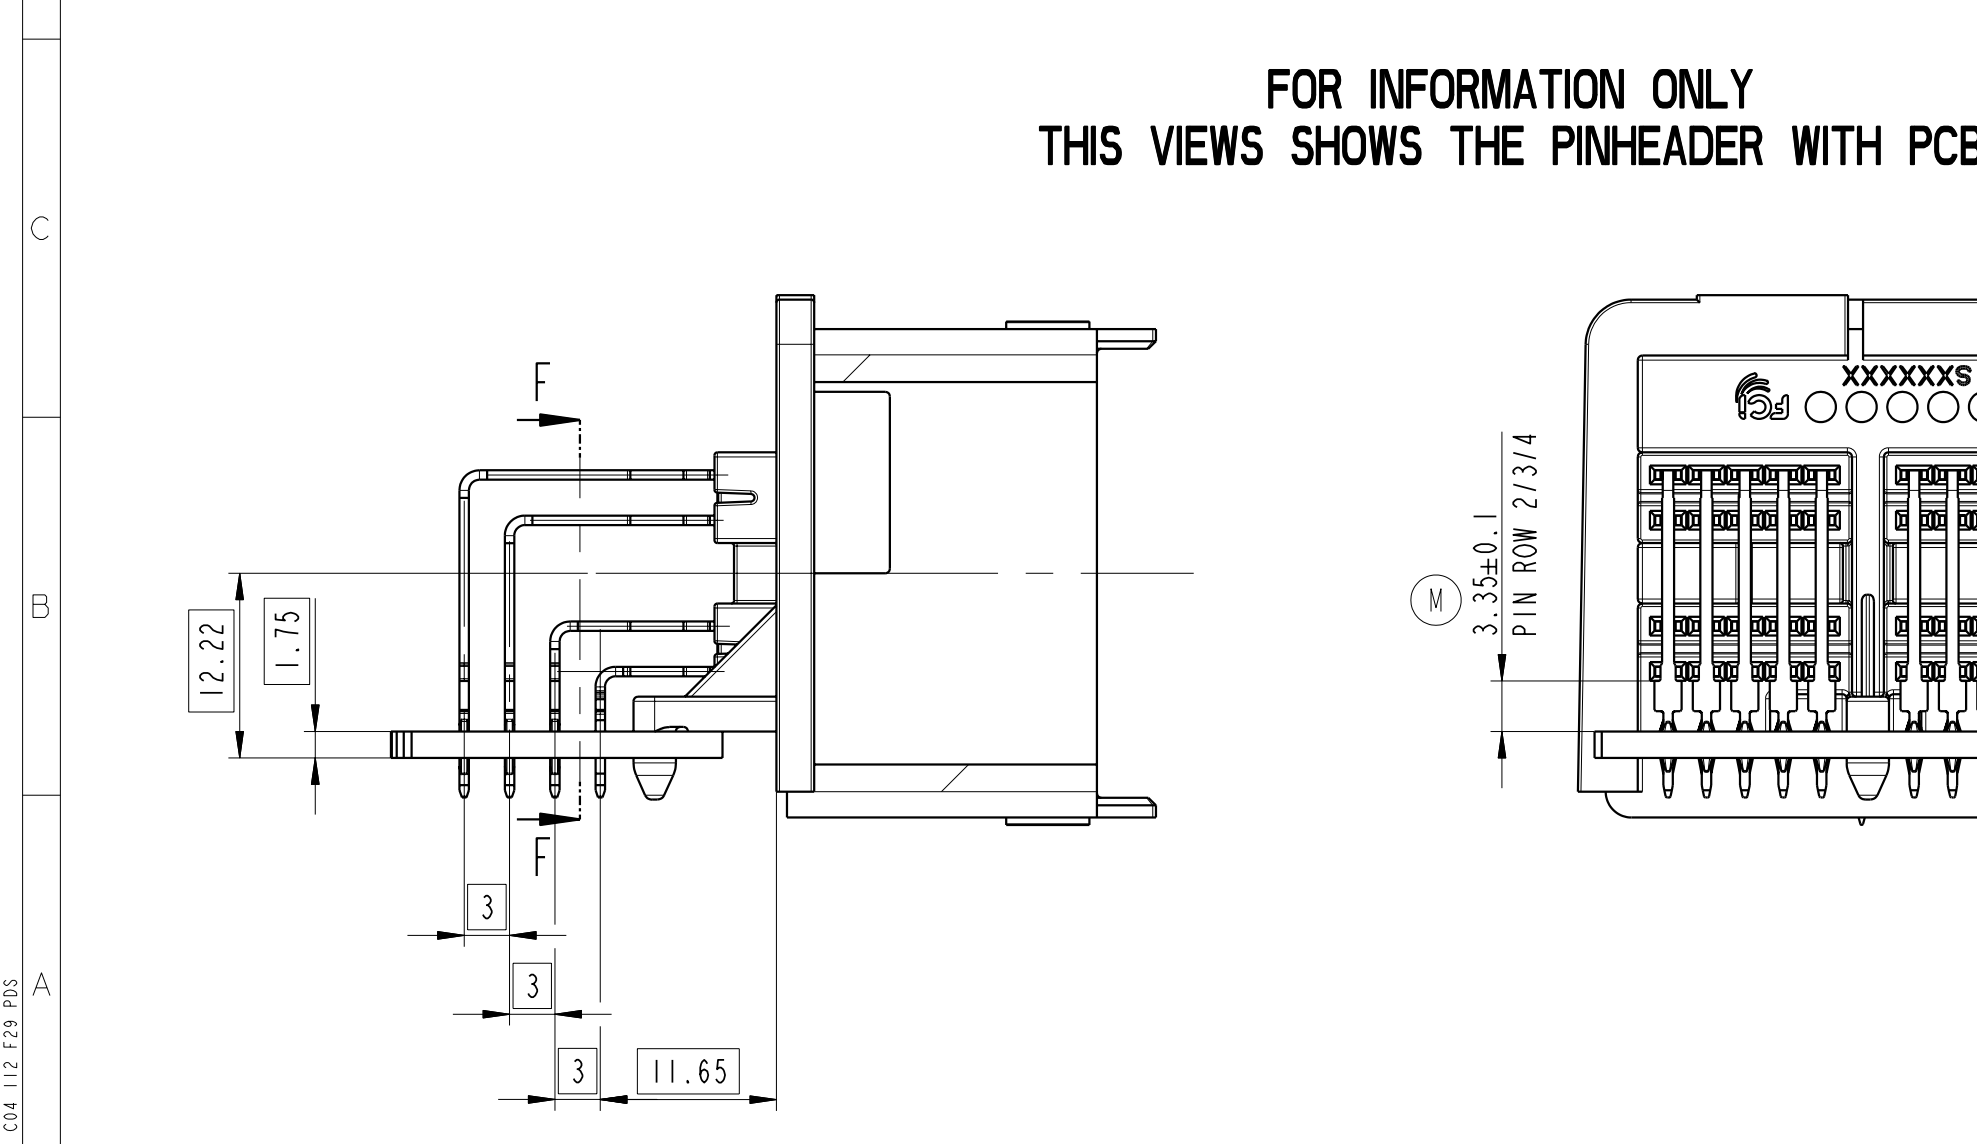
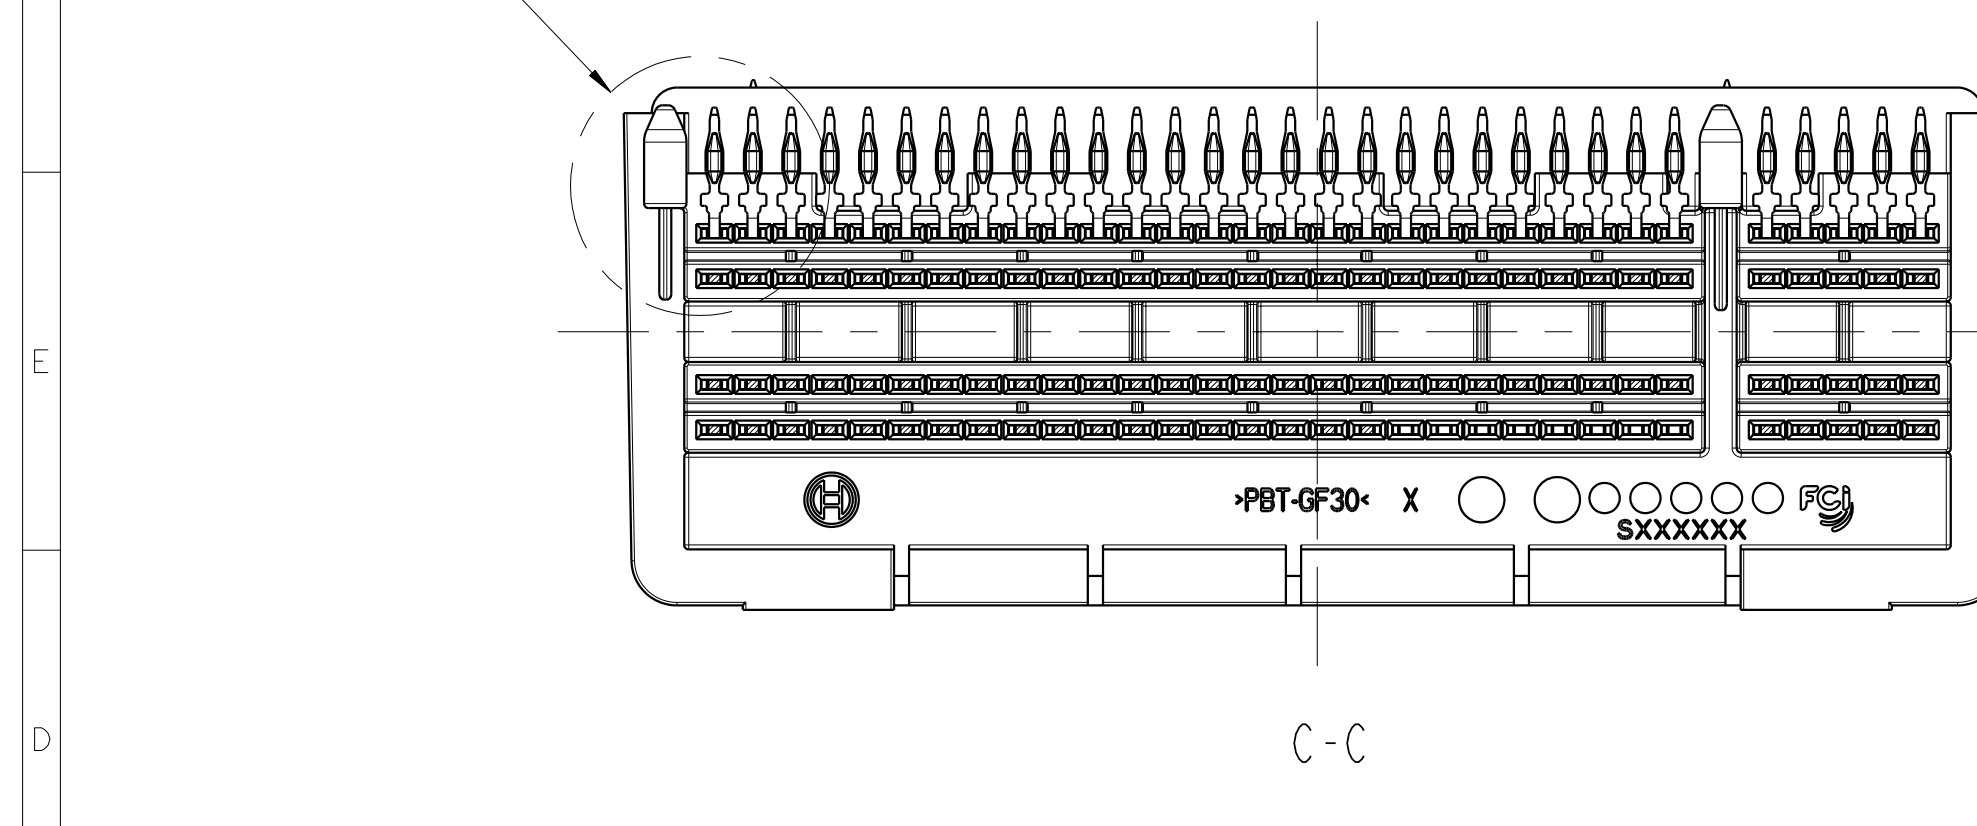
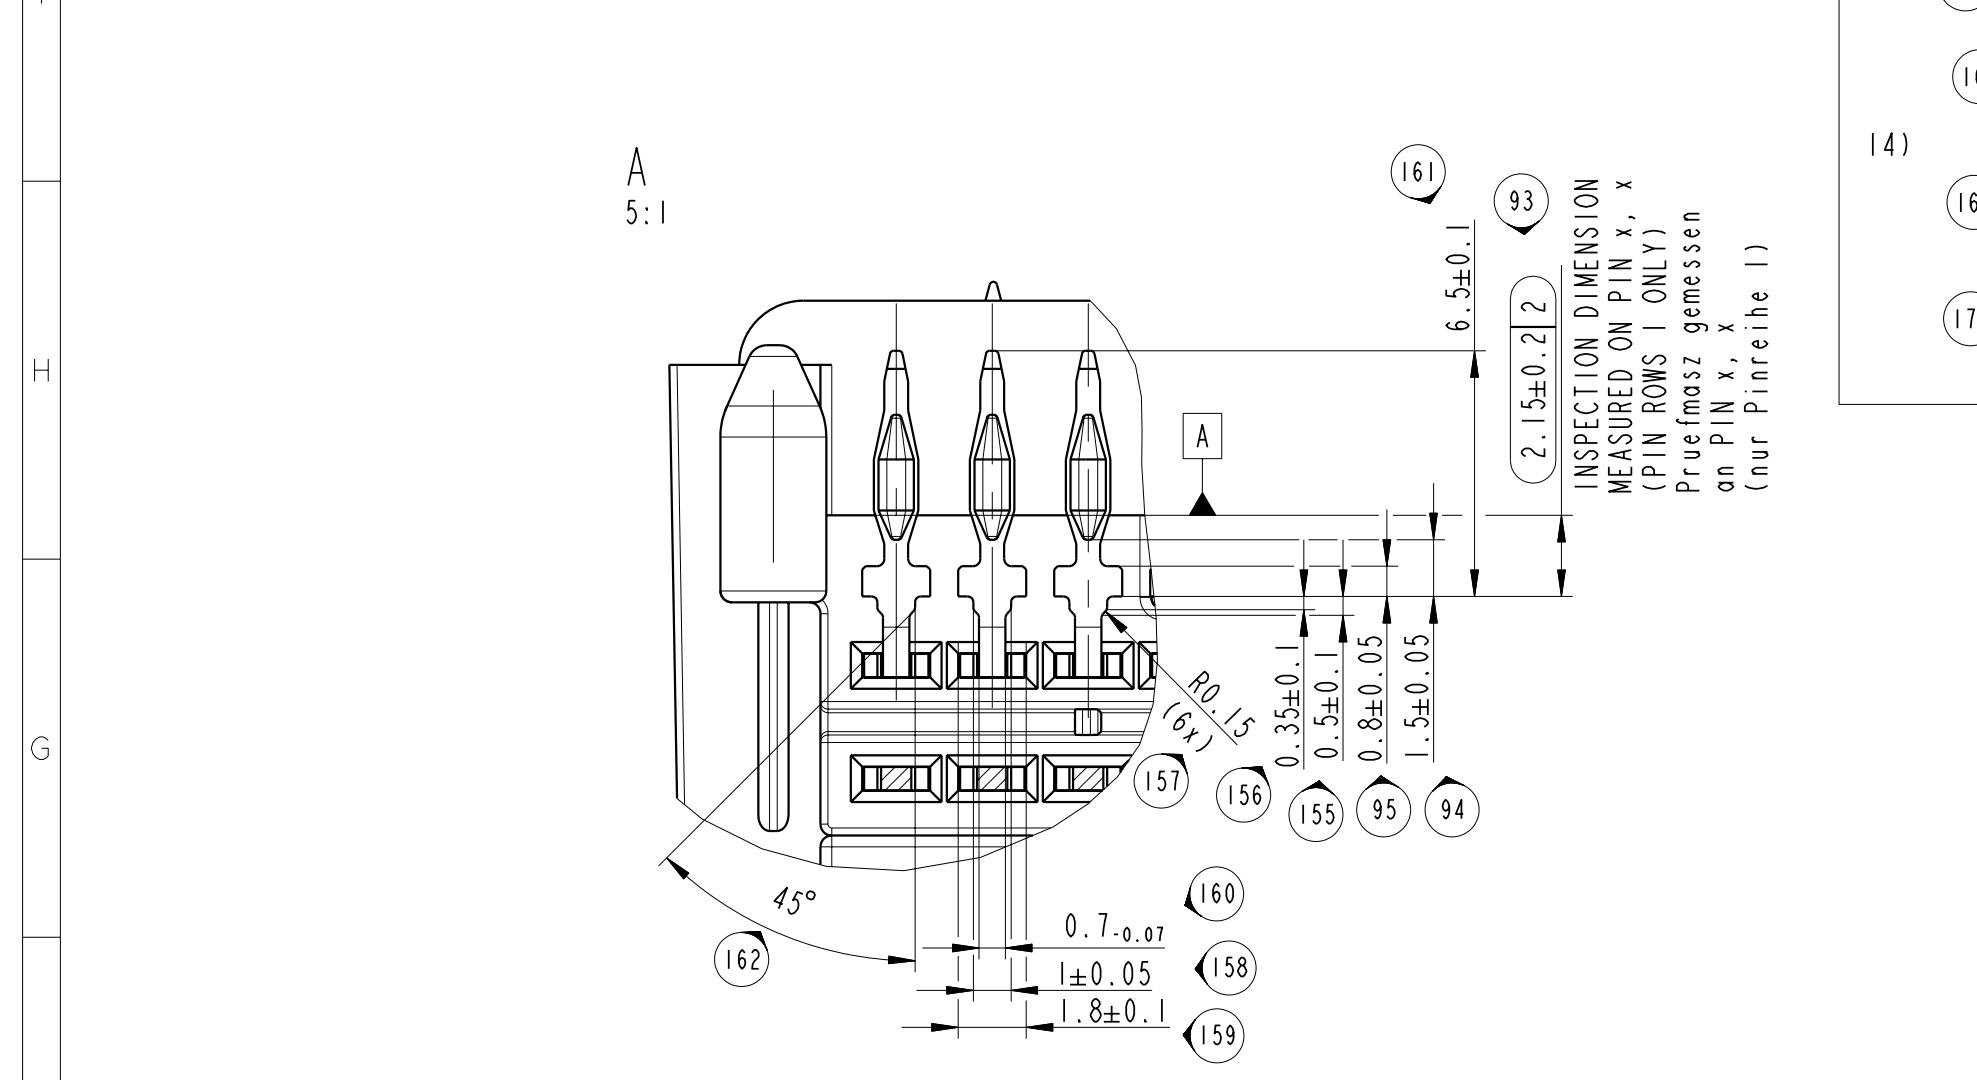
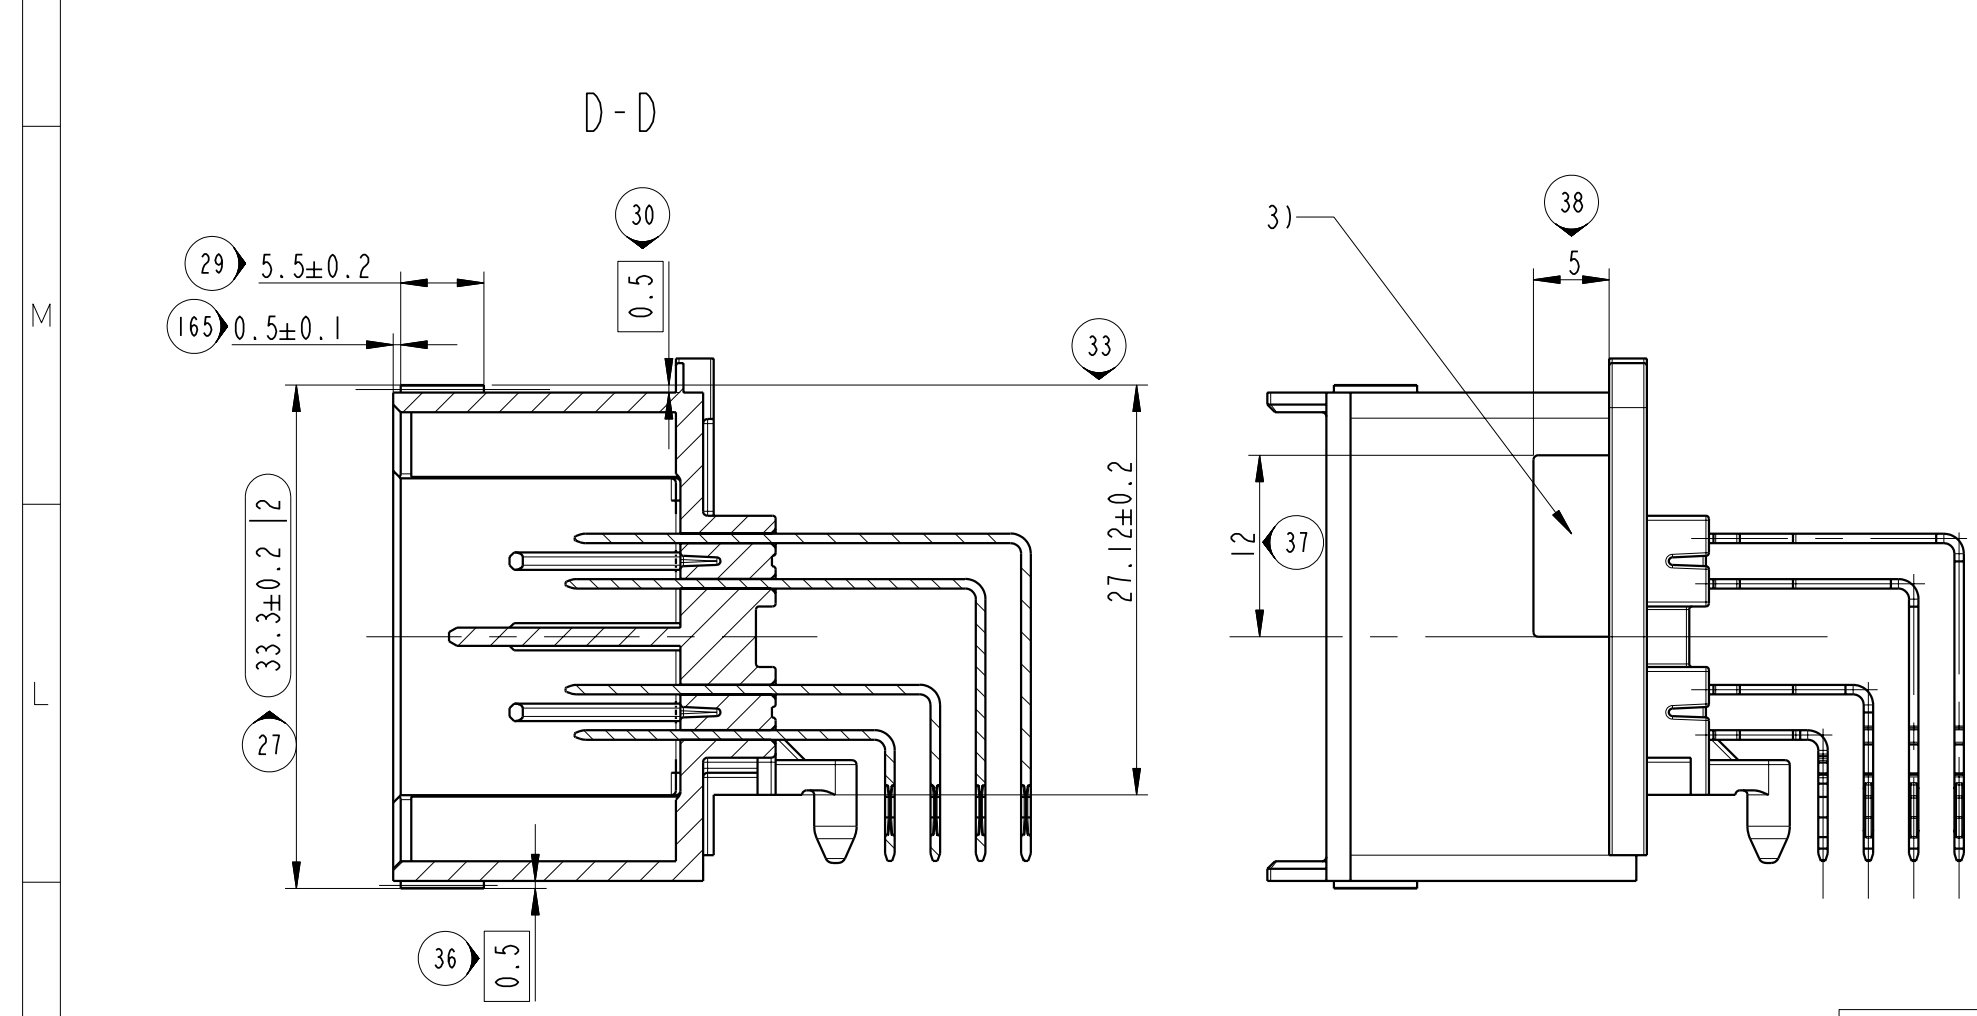


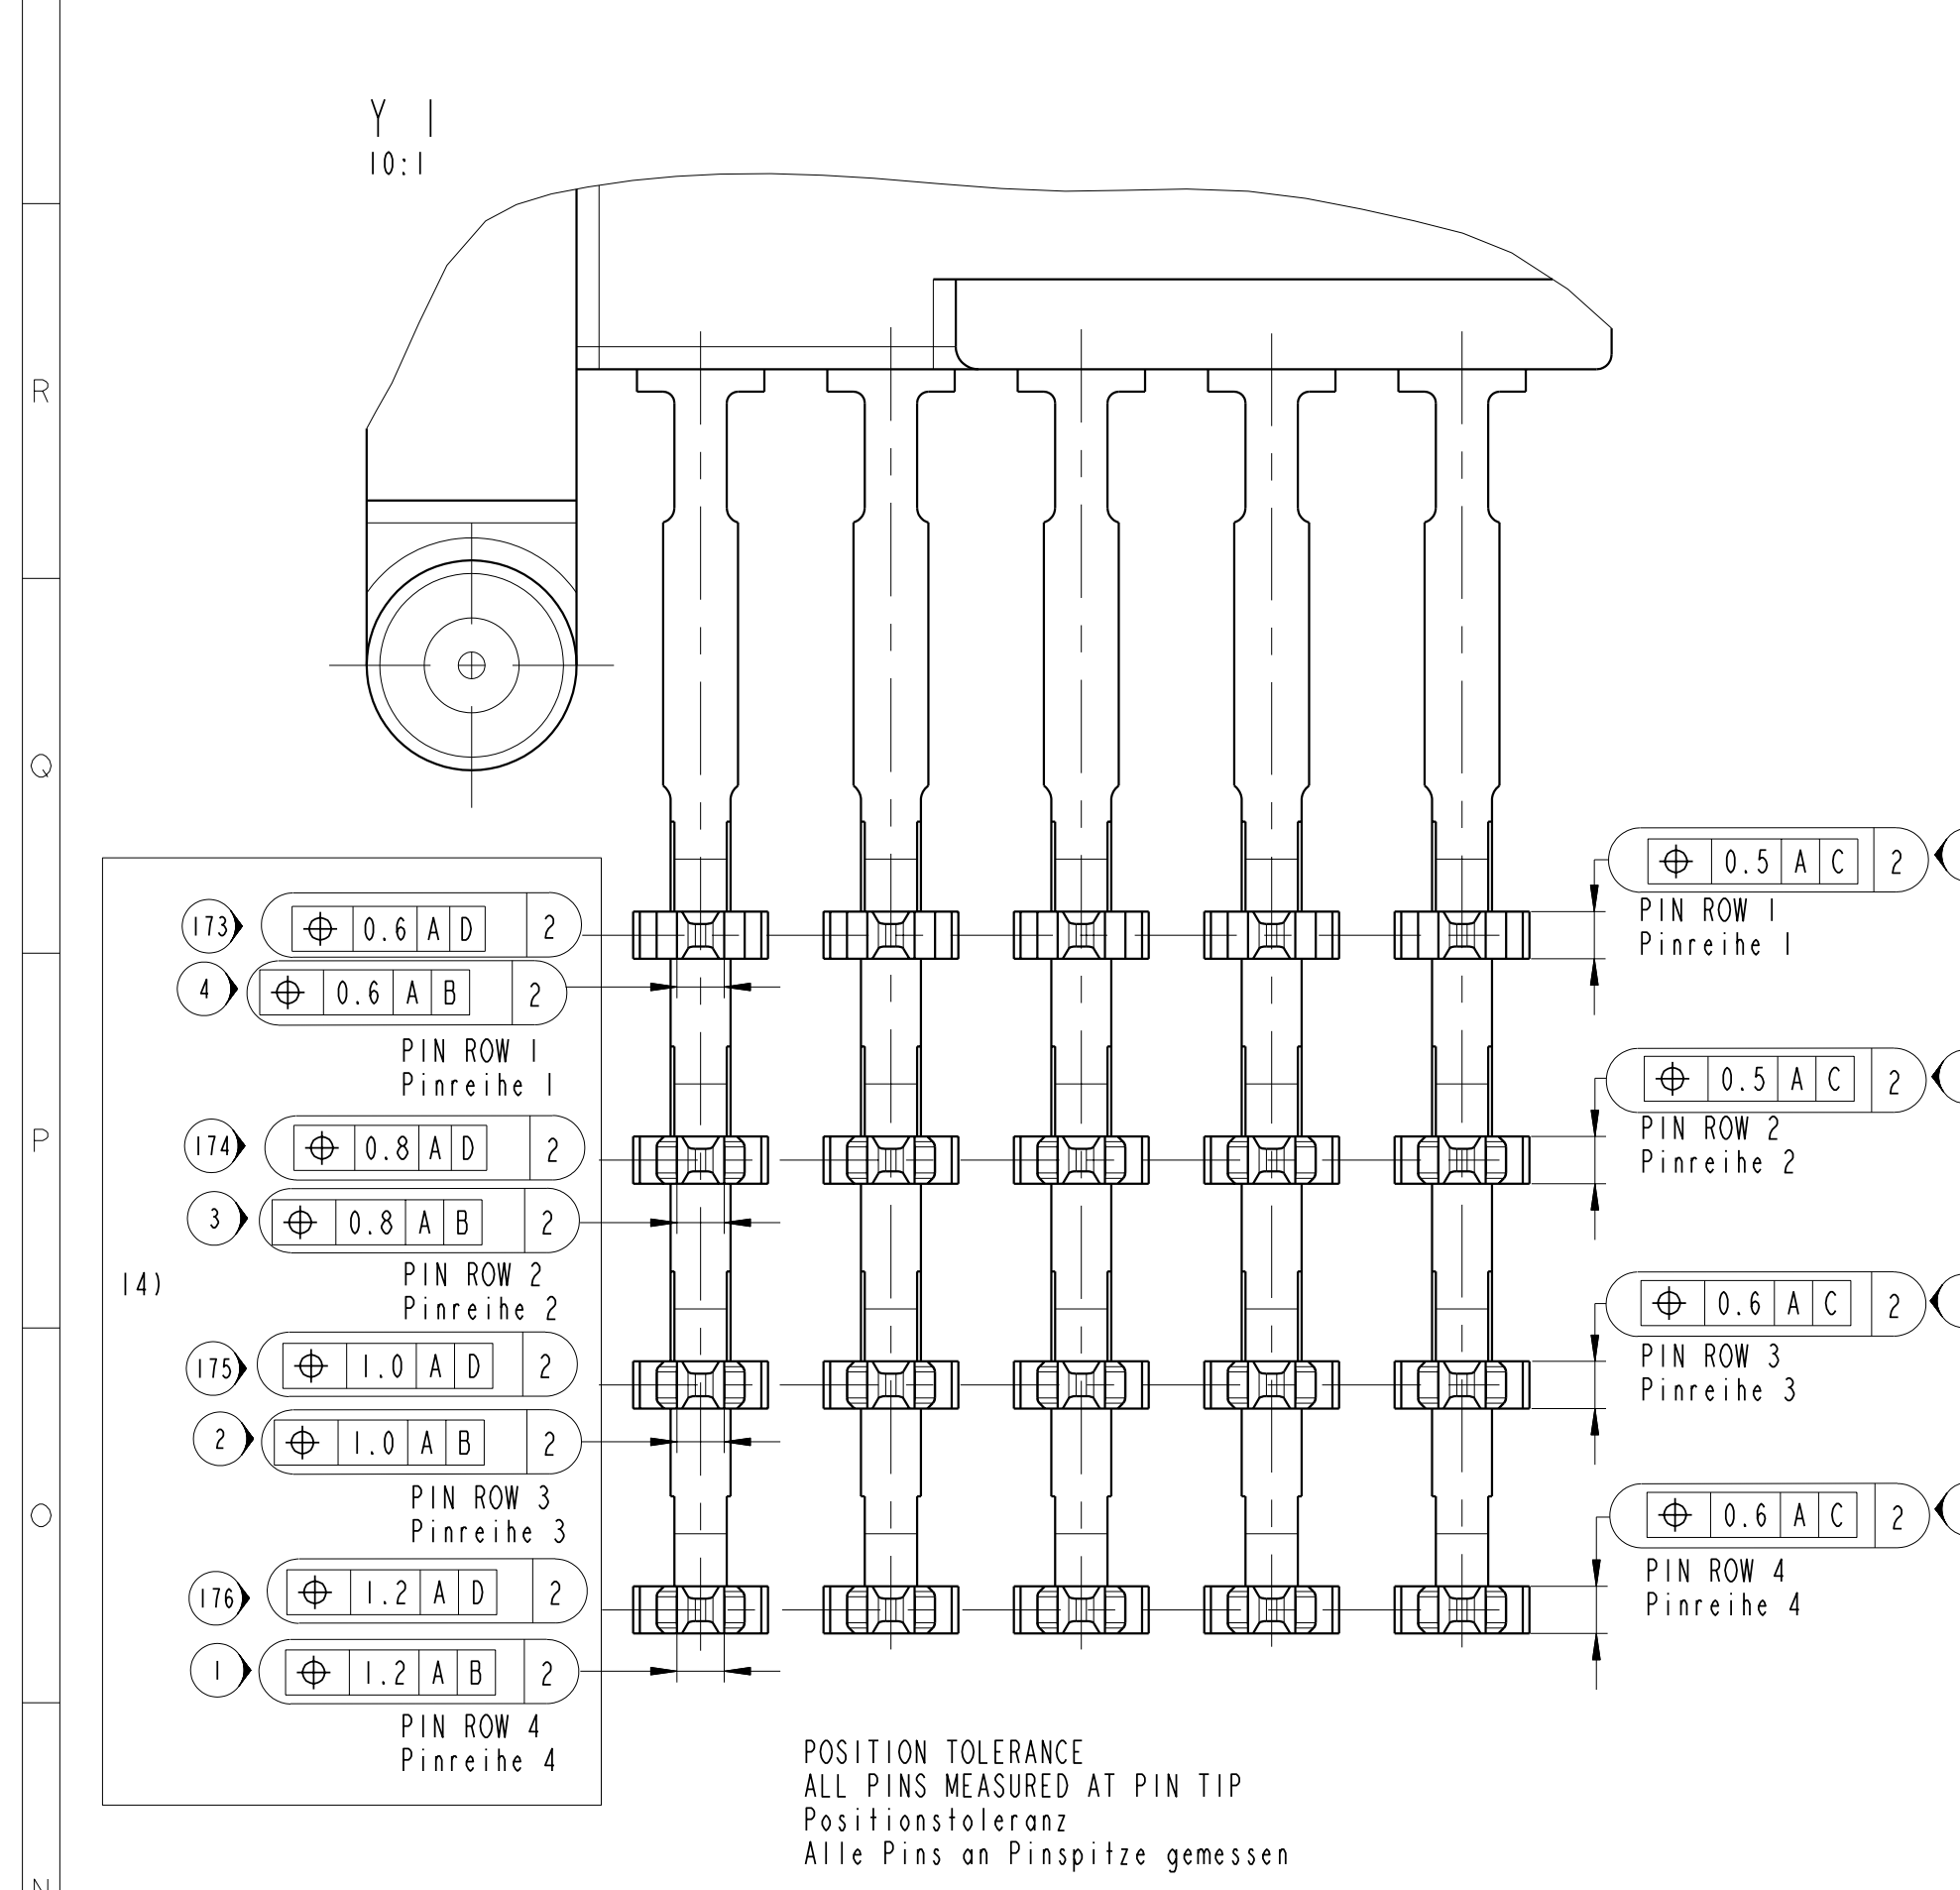

FOR INFORMATION ONLY
THIS VIEWS SHOWS THE PINHEADER WITH PCB


NEW GRIPPER AREAS FOR VARIANT 6002BE0223, 6002BE0224, 6002BE0333 AND 6002BE0334

VALID ONLY IN THE X HATCHED AREA APPLICABLE ON BOTH SIDES
(SEE SIDE VIEW)

124 WAY PIN-HEADER
124 WAY PIN-HEADER AB 10


Chrysler

CODING A / POPULATED TO VARIANT CON.VI PIN CAVITY: CLOSED BUSH PART NUMBER: 60026E0212 FCI PART NUMBER: F38220 Au PLATING THICKNESS 0.5um MIN.		Mechanical Code For Header	
		CODE	V I V I I I I I
		STATUS	0 0 0 0 0 0 0 0
		Dim 'X'	0 0 0 0 0 0 0 0
FCI Mating Component Part No	Description	Key Code	
F847100	104 Way Terminal Carrier Holder and Wire Dress Cover with Lever	A	
F571700	52 Way Terminal Carrier Left		
F471700	52 Way Terminal Carrier Right		
F767100	20 Way Terminal Carrier Holder with CPN	A	
F067100	20 Way Terminal Carrier		

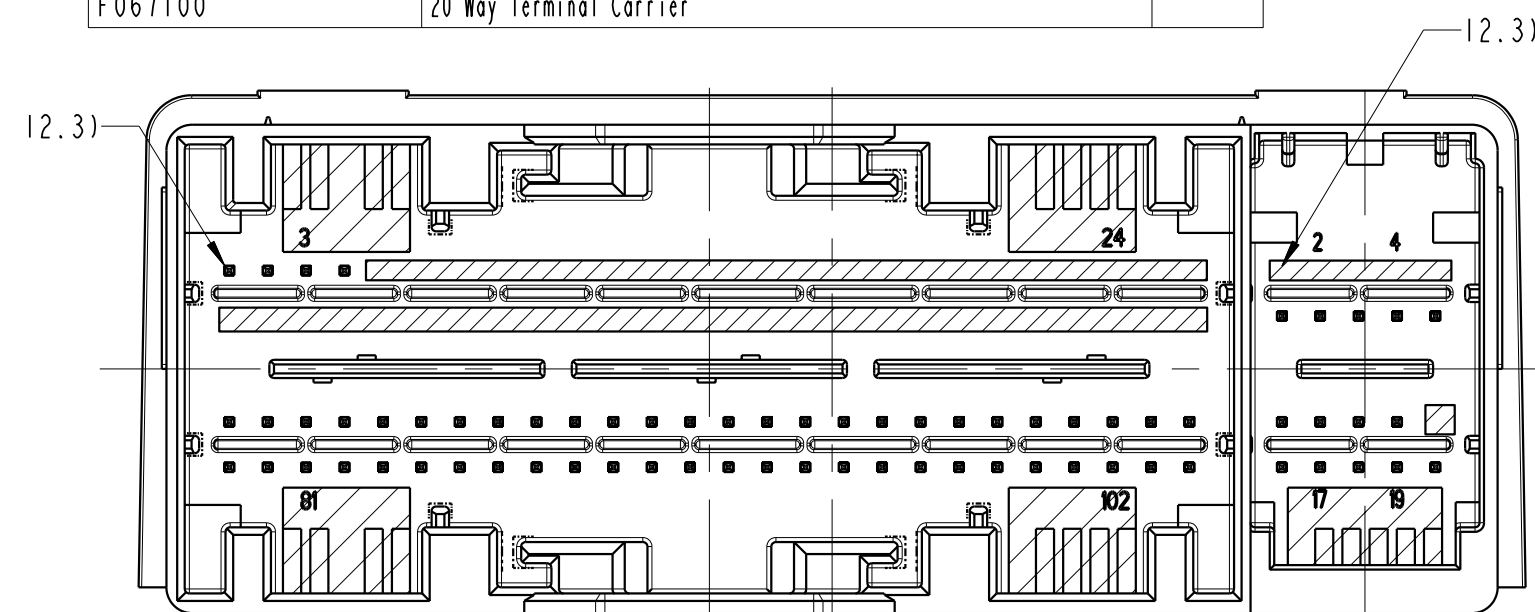


CODING A / POPULATED B6 VARIANT CONN, CMAV PIN CAVITY: CLOSED BOSCH PART NUMBER: 6002B0222 FCI PART NUMBER: F537200 As PLATING THICKNESS 0.5µm MIN.		Mechanical Code For Header							
CODE	STATUS	V	IV	II	I	I	I		
		0	0	1	0	1	0		
Dim "X"		0	0	0	0	0	0		


FCI Mating Component Part No.	Description	Key Code
F847100	104 Way Terminal Carrier Holder and Wire Dress Cover with Lener	A
F577100	50 Way Terminal Carrier Left	
F477100	50 Way Terminal Carrier Right	
F767100	20 Way Terminal Carrier Holder with CPA	A
F067100	20 Way Terminal Carrier	

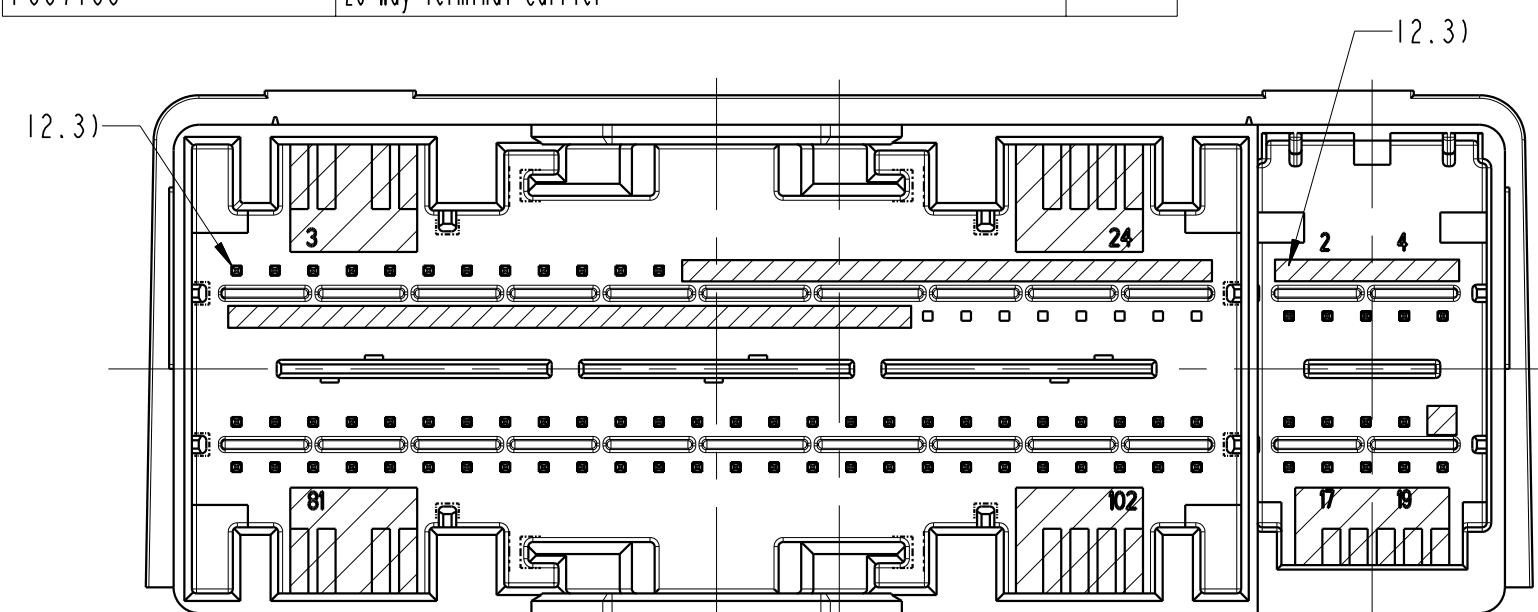

CODING BY A POPULATED 70 VARIANT CONN. PT. PIN CAVITY: CLOSED BOSCH PART NUMBER: 60026E0235 FCY PART NUMBER: F492200 Au PLATING THICKNESS 0.5um MIN.		Mechanical Code For Header	
CODE	STATUS	Y	I
		IV	I
		0	0
		0	0
Dim 'X'		0	0
		0	7

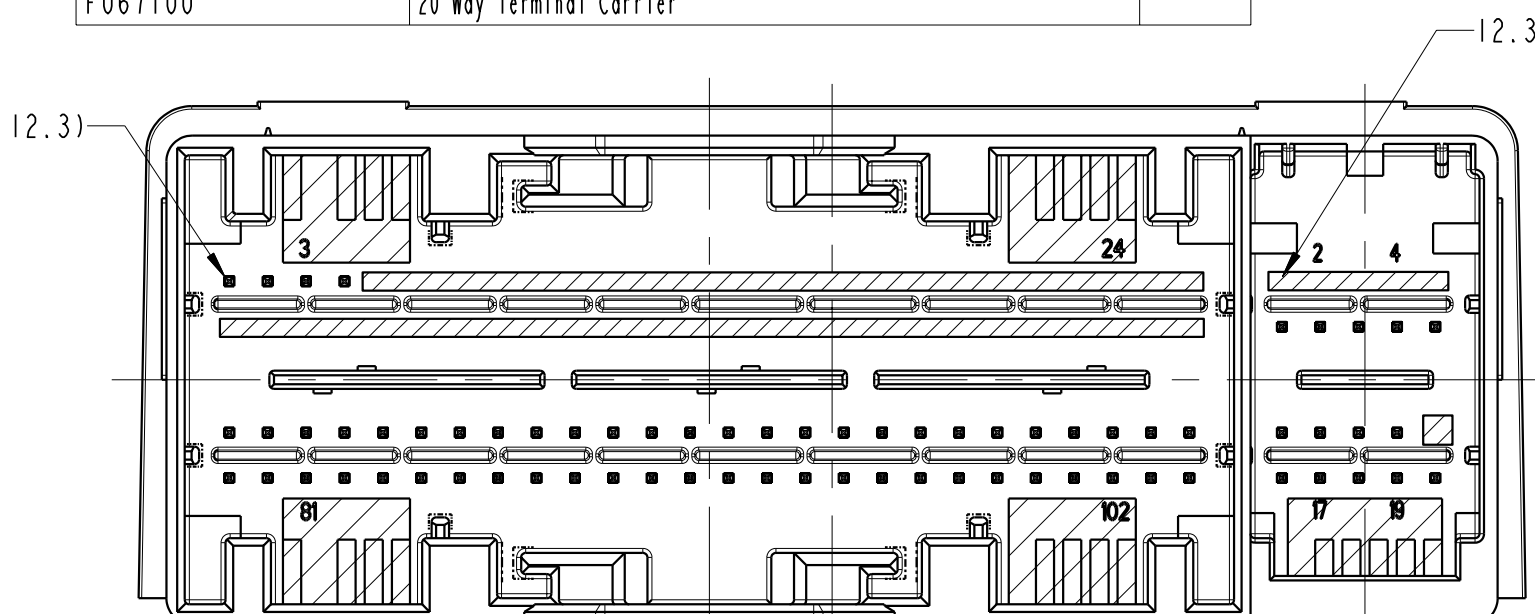


CODING B / POPULATED B6		Mechanical Code For Header	
VARIANT CONN. CMW		CODE	V I V I I I I I
PIN CAVITY: CLOSED		STATUS	0 1 1 1 1 1 1 0
BOSCH PART NUMBER: 6002BE0238		Dim "X"	0 0 0 0 7 0 0 0
FCI PART NUMBER: F537200			
AW PLATING THICKNESS 0.5 μm MIN.			
FCI Mating Component Part No. Description	Key Code		
F947100 104 Key Terminal Carrier Holder and Wire Dress Cover with Lever	B		
F577100 32 Key Terminal Carrier Left			
F477100 35 Key Terminal Carrier Right			
F767100 20 Key Terminal Carrier Holder with CPA	A		
0697100 10 Key Terminal Carrier			

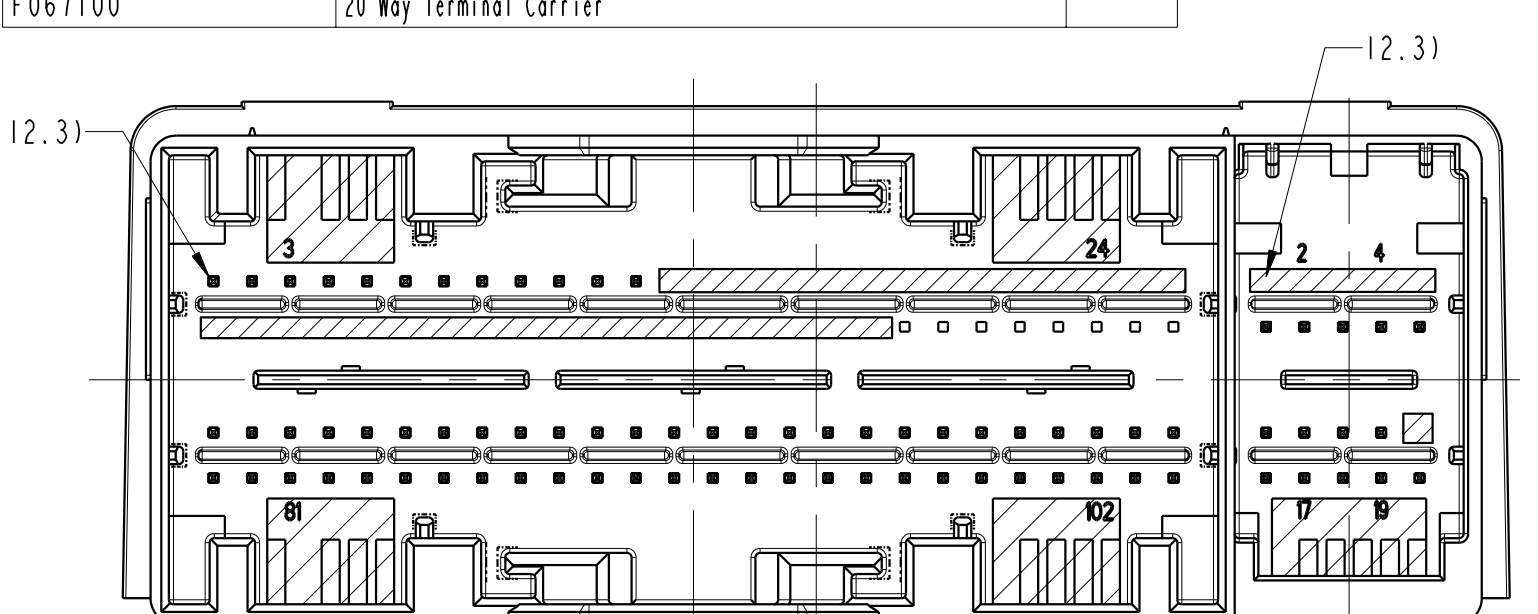


CODING A / POPULATED I III		Mechanical Code For Header	
VARIANT: CONN-V5		CODE	V I W I I I I
PIN CAVITY: CLOSED		STATUS	0 1 1 1 1 1 1
BOSCH PART NUMBER: 6002BE0226		Dim "X"	0 0 0 7/8 0 0 0
FCI PART NUMBER: F441200			
As PLATING THICKNESS: 0.5um MIN.			

FCI Mating Component Part No.	Description	Key Code
F847100	18 Way Terminal Carrier Holder and Wire Dress Cover with Lenses	A
F5717100	18 Way Terminal Carrier Left	
F4717100	32 Way Terminal Carrier Right	
F767100	20 Way Terminal Carrier Holder with CPA	A


— 12 — 31

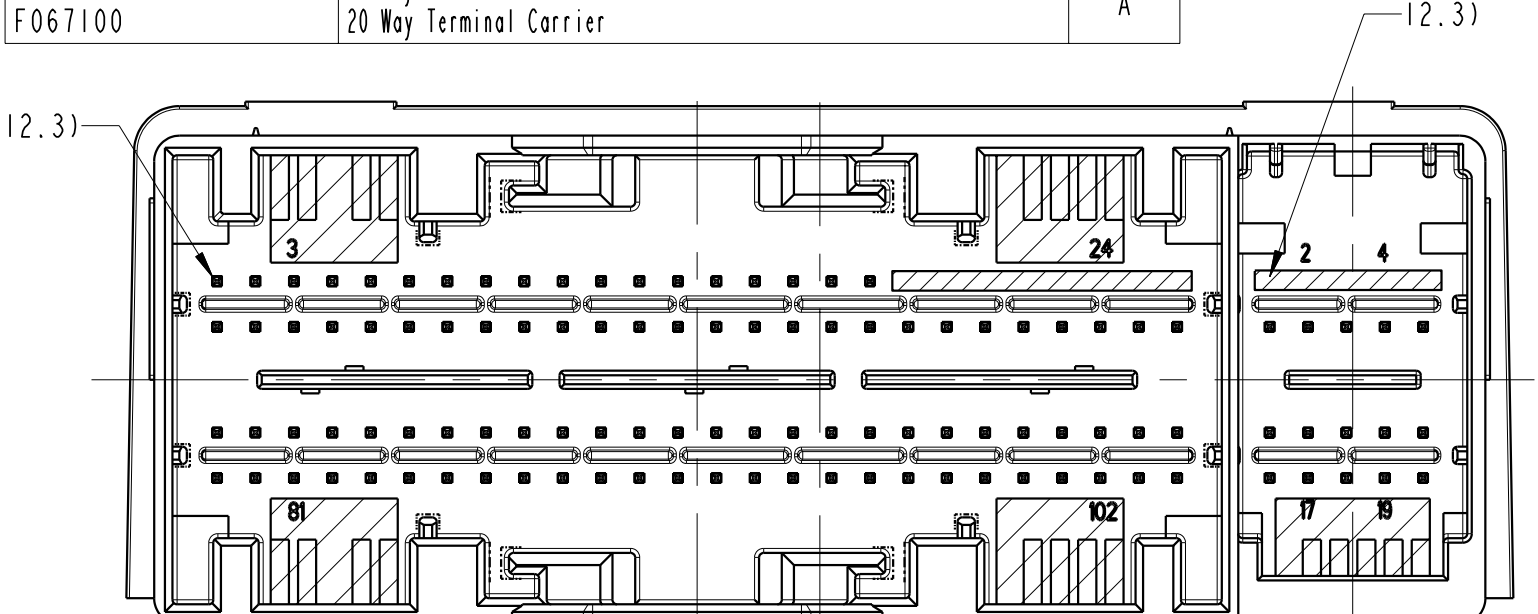



CODING BY 7 POPULATED 77 VARIANT CONN V2				NEW GRIPPER AREAS ADDED FOR THIS VARIANT				Mechanical Code For Header						
P/N CAVITY: OPEN BOSCH PART NUMBER: 600260223 FCI PART NUMBER: F937200 As PLATING THICKNESS 0.8µm MIN.								CODE STATUS	V	I	W	I	I	I
								Dim "X"	0	0	0	0	0	0
FCI Mating Component Part No. Description								Key Code						
F145600		104 Way Terminal Carrier Holder and Wire Dress Cover with Lever						B						
F136600		32 Way Terminal Carrier (Left)												
F236600		32 Way Terminal Carrier (Right)												
F047100		20 Way Terminal Carrier Holder with CPA						A						
F937100		20 Way Terminal Carrier												

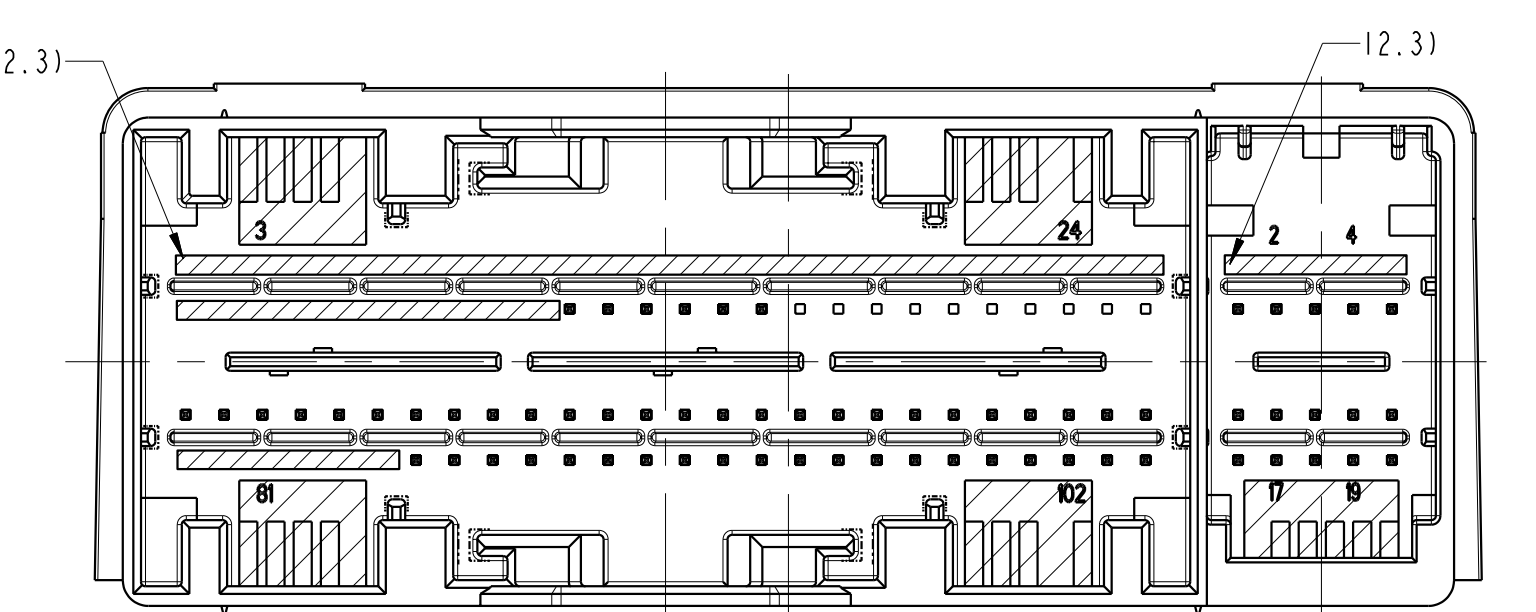


CODING C / POPULATED 93 VARIANT CONN. 93 PIN CAVITY: OPEN BOSCH PART NUMBER: 6002BE0224 FCI PART NUMBER: F47200 AS PLATING THICKNESS 0.8µm MIN.				NEW GRIPPER AREAS ADDED FOR THIS VARIANT.				Mechanical Code For Header				
								CODE	V	IV	III	I
								STATUS	0	1	0	1
								Dim 'X'	0	0	0	0
FCI Mating Component Part No./Description								Key Code				
F235600 104 Way Terminal Carrier Holder and Wire Dress Cover with Lever								C				
F133600 52 Way Terminal Carrier Left												
F235600 52 Way Terminal Carrier Right												
F047100 20 Way Terminal Carrier Holder with CPA												

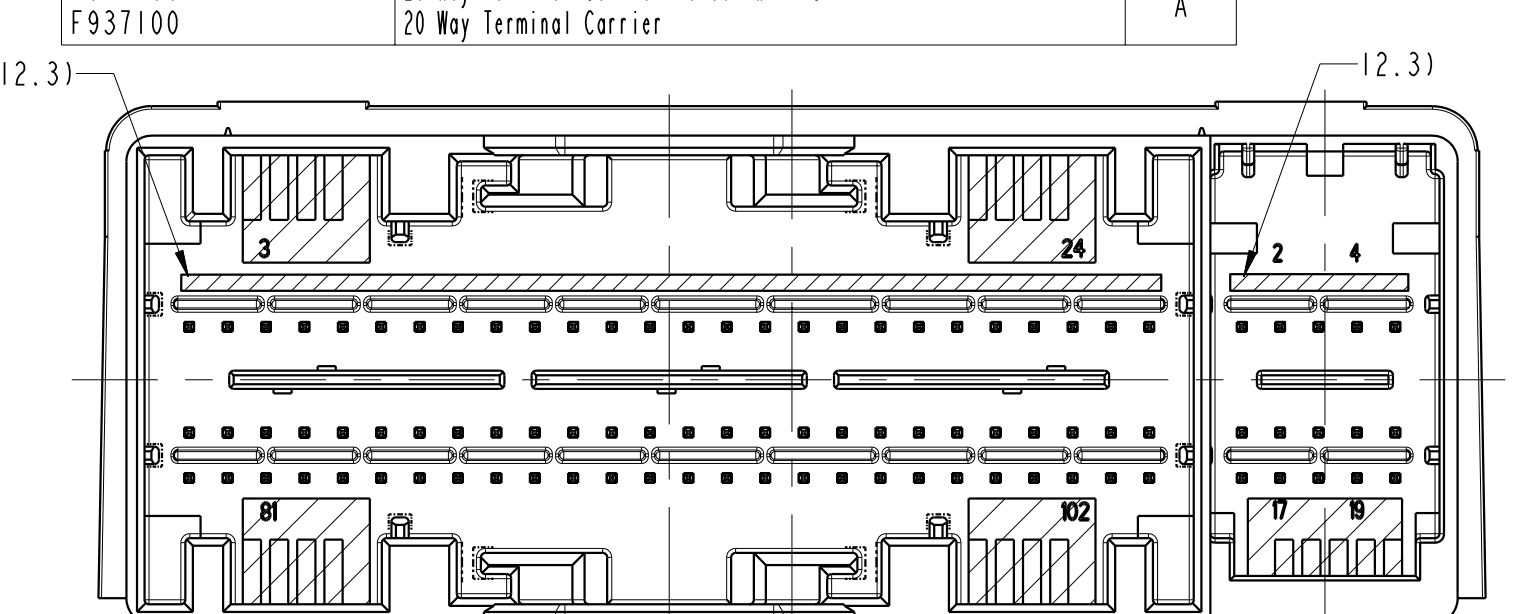


CODING A / POPULATED IOI		Mechanical Code For Header	
VARIANT CONN_V4		CODE	V I V I I I I I
PIN CAVITY: OPEN		STATUS	Q 1 1 1 0 1
BOSCH PART NUMBER: 6002BE0225		Dim "X"	0 0 1 0 7 0 7 0 0 0 0 7
FCT PART NUMBER: F347200			
Au PLATING THICKNESS 0.8µm MIN.			
FCT Mating Component Part No	Description	Key Code	
F627100	104 Key Terminal Carrier Holder With Wire Dress Cover With Lever	A	(M)
F427100	50 Key Terminal Carrier Left		
F527100	50 Key Terminal Carrier Right		
F047100	20 Key Terminal Carrier Holder with CPA	A	
F937100	20 Key Terminal Carrier		

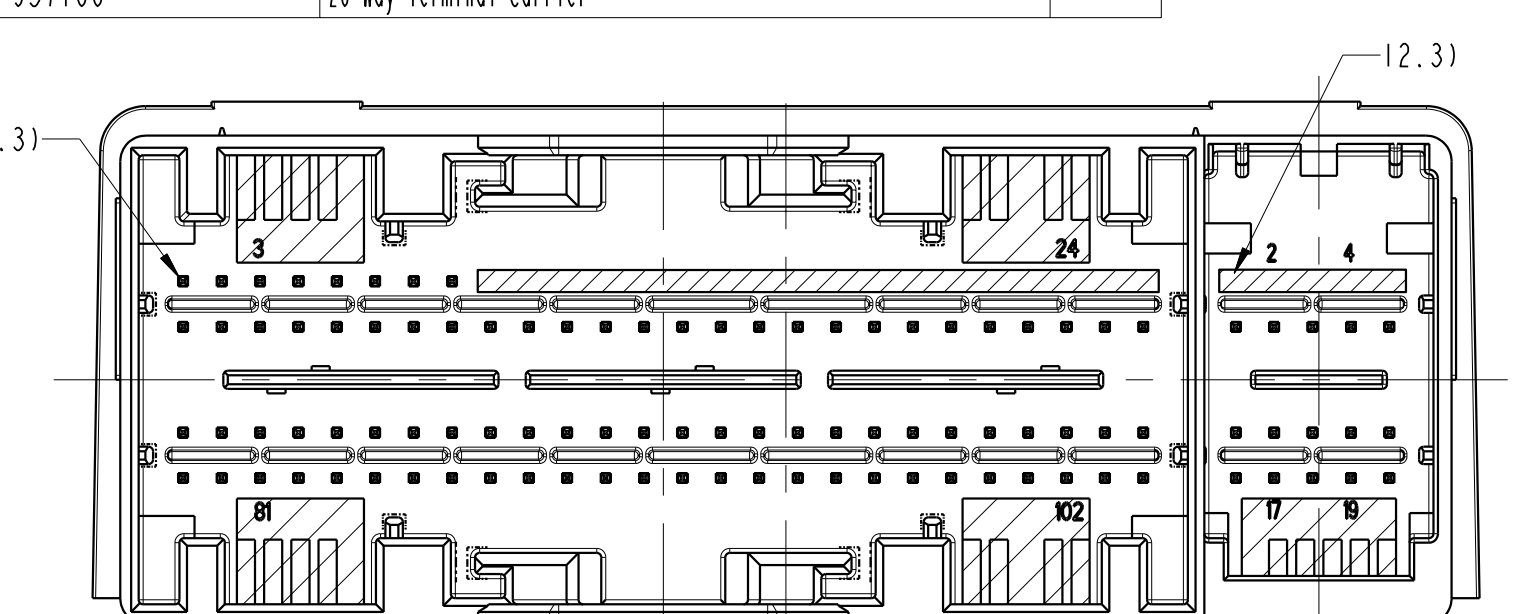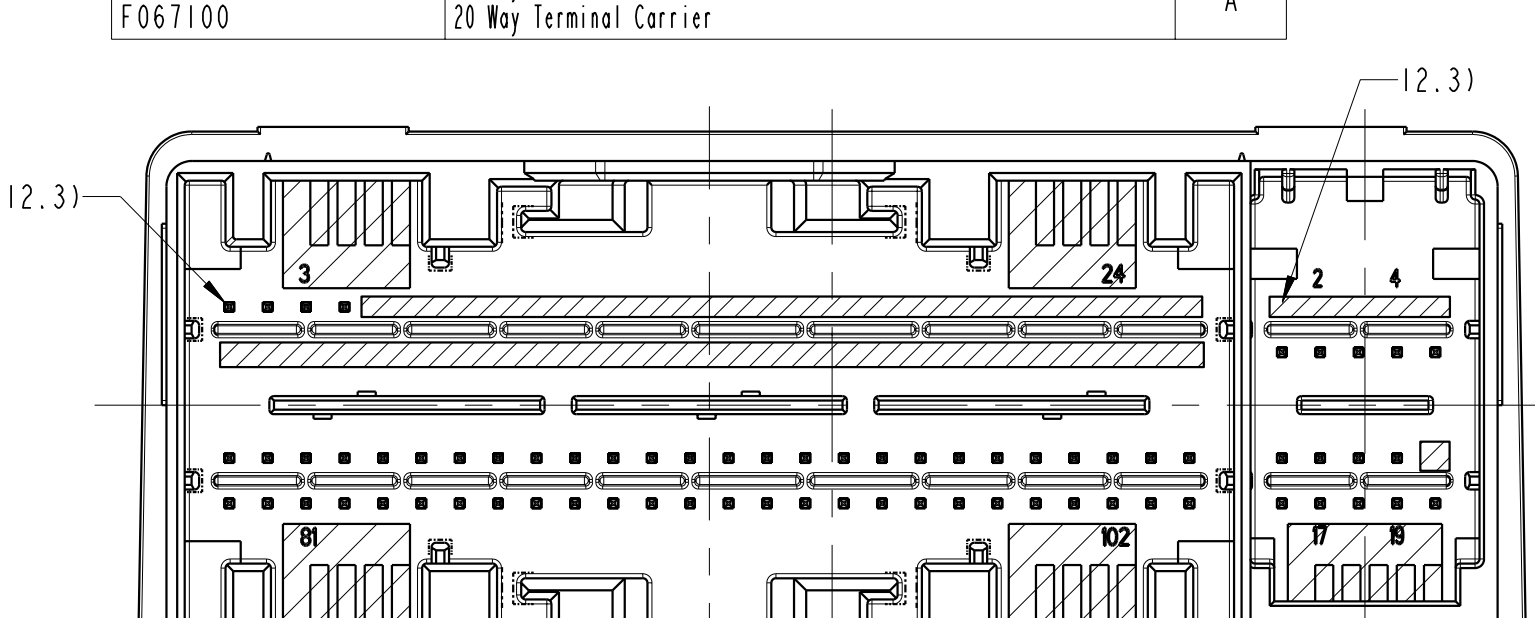[illegible]


CODING C / POPULATED B6 VARIANT CONN CMAX PIN CAVITY: CLOSED BOSCH PART NUMBER: 6002BE0239 FCI PART NUMBER: F137100 As PLATING THICKNESS 0.5µm MIN.		Mechanical Code For Header CODE V I V I I I I STATUS 0 0 1 1 1 1 Dim "X" 0 0 0 0 7.0 7.0	
FCI Mating Component Part No.	Description	Key Code	
F057100	104 Way Terminal Carrier Holder and Wire Dress Cover with Lener	C	
F571100	52 Way Terminal Carrier Left		
F477100	52 Way Terminal Carrier Right		
F267100	52 Way Terminal Carrier Holder with CPA		

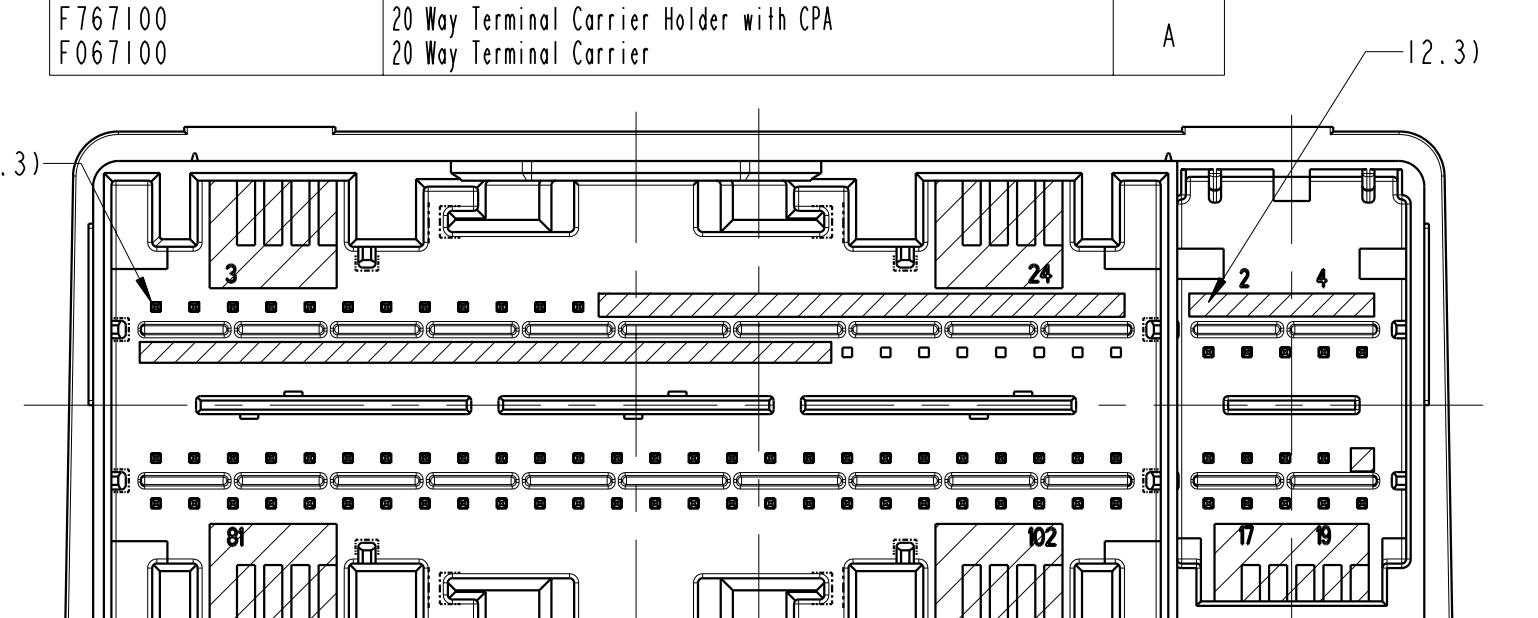

CODING A / POPULATED I I I		Mechanical Code For Header	
VARIANT CONN_V5		CODE	V I V I I I I I
PTN CAVITY: OPEN		STATUS	0 1 1 0 1 0 1
BOSCH PART NUMBER: 6002BE0268		Dim "X"	0 0 0 7 0 0 0 0 0 0
FCL PART NUMBER: F815300			
AA PLAYING THICKNESS 0.8um MIN.			

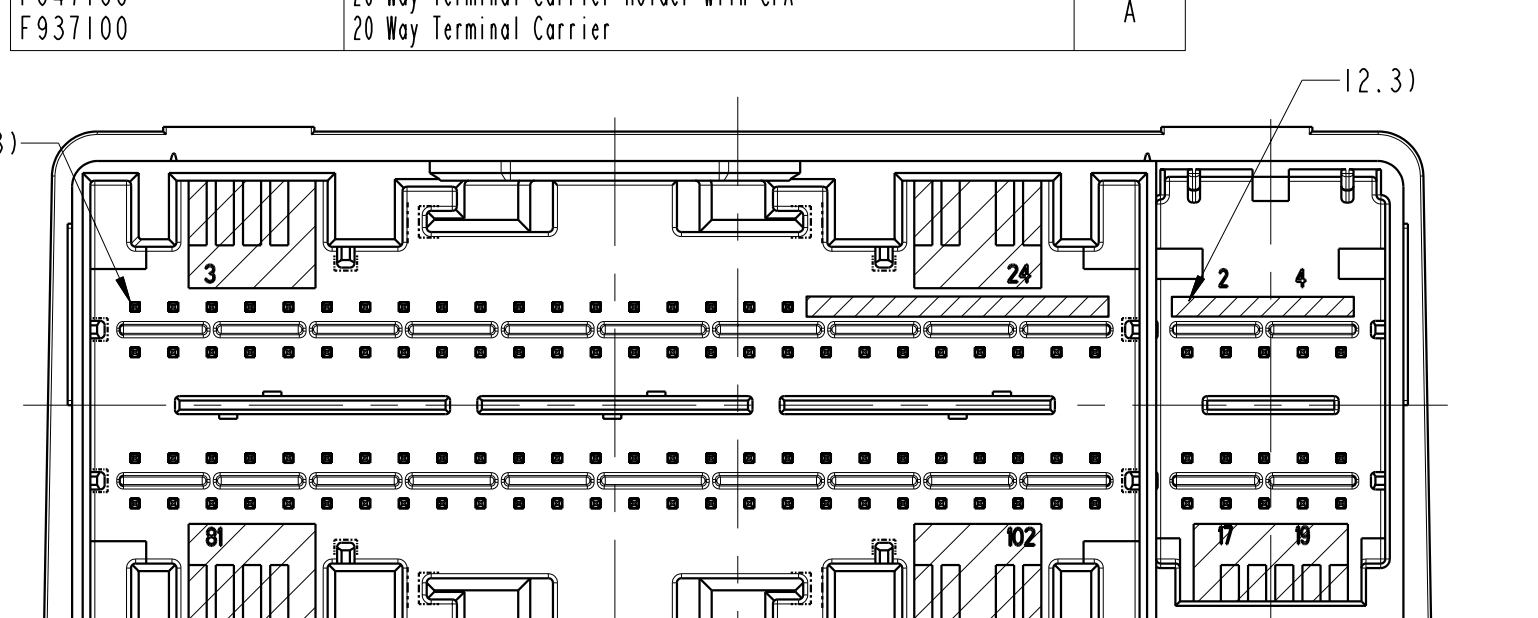


CODING D / POPULATED 101 VARIANT XXX DIM CAVITY: OPEN BOSCH PART NUMBER: 6002BE0333 CI PART NUMBER: F69700 PLATING THICKNESS: 0.6µm MIN.				NEW GRIPPER AREAS ADDED FOR THIS VARIANT.				<table><tr><th colspan="7">Mechanical Code For Header</th></tr><tr><th>STATUS</th><th>V</th><th>I</th><th>W</th><th>I</th><th>I</th><th>I</th></tr><tr><td>0</td><td>1</td><td>1</td><td>1</td><td>1</td><td>1</td><td>1</td></tr></table>							Mechanical Code For Header							STATUS	V	I	W	I	I	I	0	1	1	1	1	1	1
Mechanical Code For Header																																			
STATUS	V	I	W	I	I	I																													
0	1	1	1	1	1	1																													
Dim "X" = 0.710.710.710																																			
CI Mating Component Part No. Description								Key Code																											
927100	100 W Terminal Carrier Holder and Wire Dress Cover with Lever							D																											
927100	32 W Terminal Carrier Left																																		
527100	32 W Terminal Carrier Right																																		
047100	20 W Terminal Carrier Holder with CPA							A																											
047100	20 W Terminal Carrier Left																																		

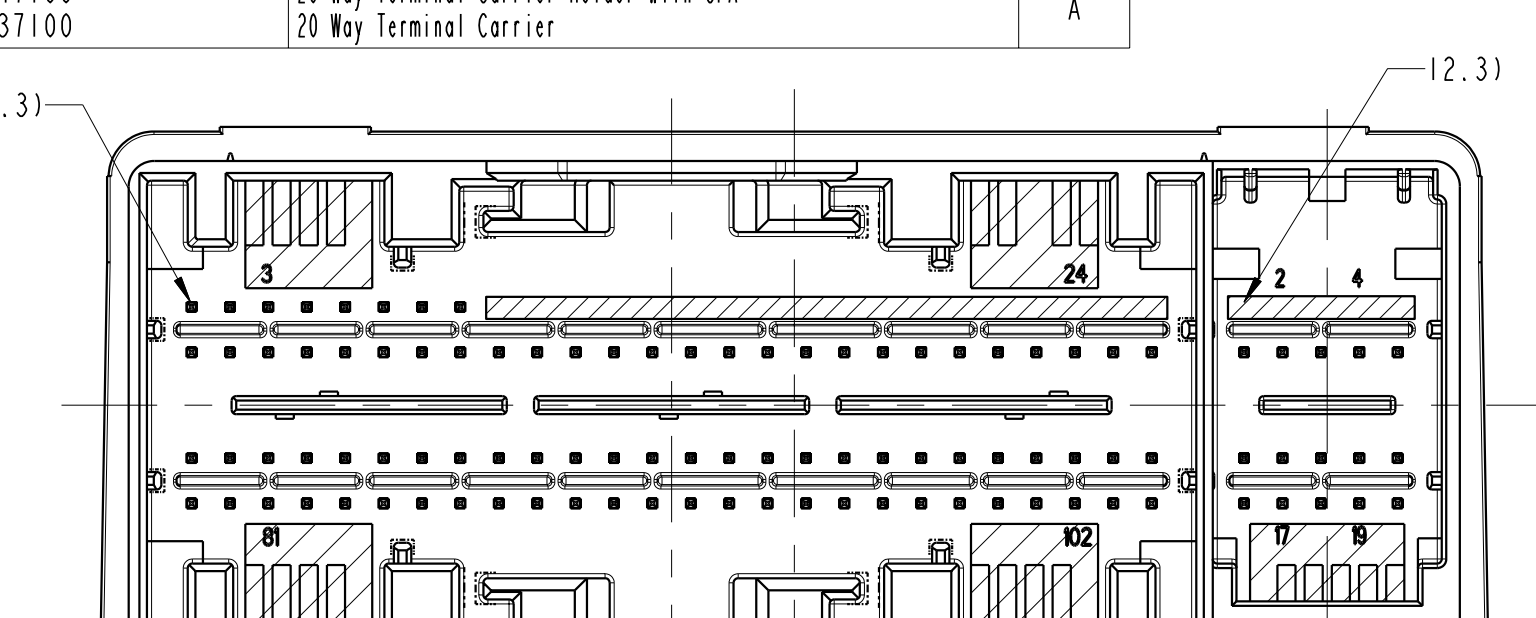


CODE B V POPULATED 101 VARIANT CONN.V4 BIN CAVITY: OPEN PUSH PART NUMBER: 6002600241 FCI PART NUMBER: F147200 AN PLATING THICKNESS 0.06um MIN.		Mechanical Code For Header				
		CODE	Y	I	V	II
		STATUS	1	0	0	0
		Dim "X"	0	7	0	0

FCI Mating Component Part No.	Description	Key Code
F145600	104 Key Terminal Carrier Holder and Wire Dress Cover with Lener	B
F135600	30 Key Terminal Carrier Left	
F235600	30 Key Terminal Carrier Right	
F047100	20 Key Terminal Carrier Holder with CPA	A
F937100	20 Key Terminal Carrier	

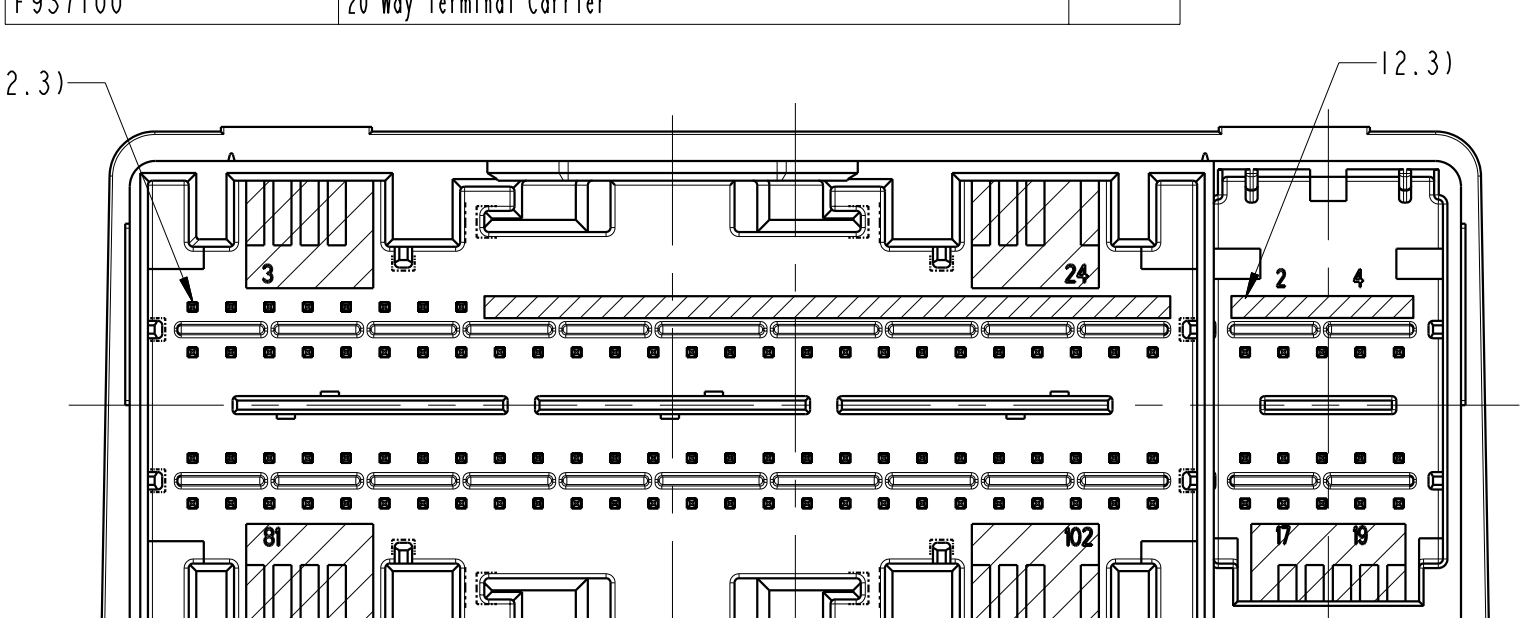


CODING D / POPULATED TO		Mechanical Code For Header				
VARIANT CONN-V1		CODE	V	I	I	I
PIN CAVITY: CLOSED		STATUS	0	1	0	0
BOSCH PART NUMBER: 600280237		Dim "X"	0	0	0.7	0
FCI PART NUMBER: F431200						
Aw PLATING THICKNESS 0.5um MIN.						


FCI Mating Component Part No	Description	Key Code
F157100	104 Key Terminal Carrier Holder and Wire Dress Cover with Lever	D
F577100	52 Key Terminal Carrier Left	
F477100	50 Key Terminal Carrier Right	
F767100	20 Key Terminal Carrier Holder with CPA	A

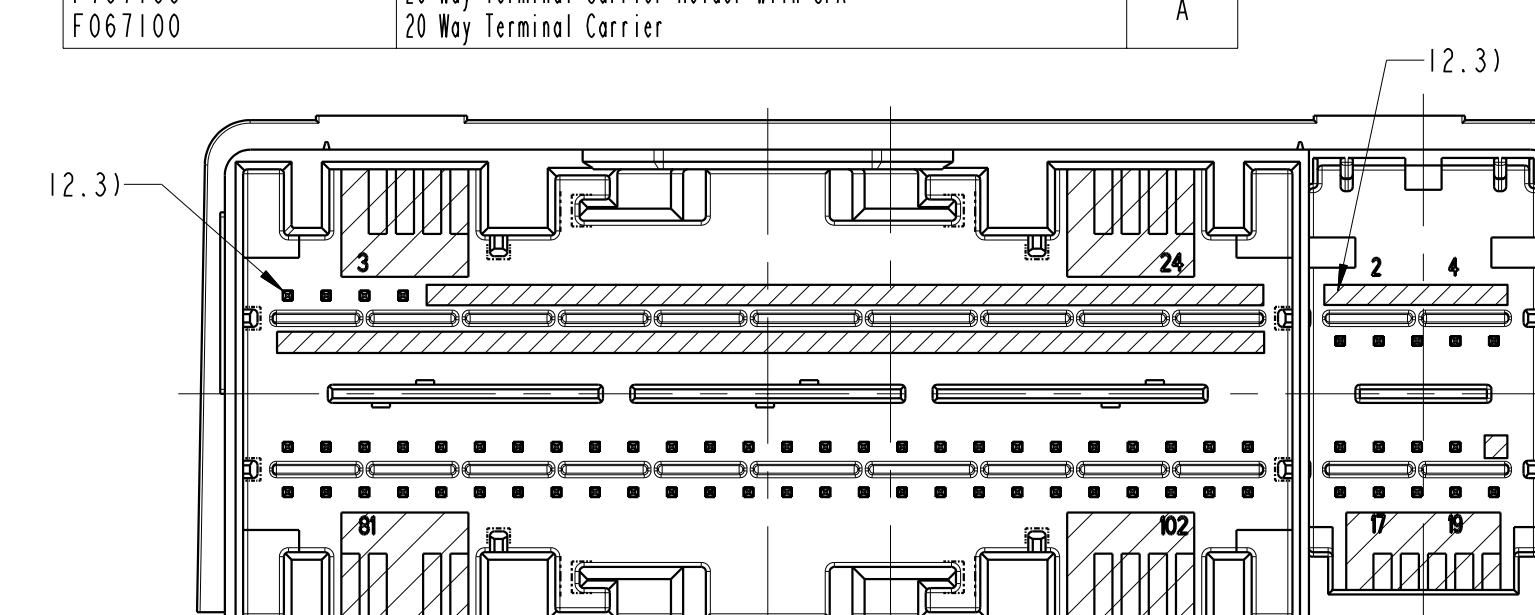



CODING D / POPULATED 86		Mechanical Code For Header	
VARIANT CONN. CMX		CODE	V I H I I I I
PIN PART: CLOSED		STATUS	0 1 0 0 0 0
BUSCH PART NUMBER: 60020E0240		Dim "X"	0 0 7 0 0 0
FCI PART NUMBER: F832200			
AS PLATING THICKNESS 0.5µm MIN.			
FCI Mating Component Part No.	Description	Key Code	
F157100	104 Way Terminal Carrier Holder and Wire Dress Cover with Lener	D	
F577100	50 Way Terminal Carrier Left		
F477100	50 Way Terminal Carrier Right		
F767100	20 Way Terminal Carrier Holder with CPA	A	
F067100	20 Way Terminal Carrier		

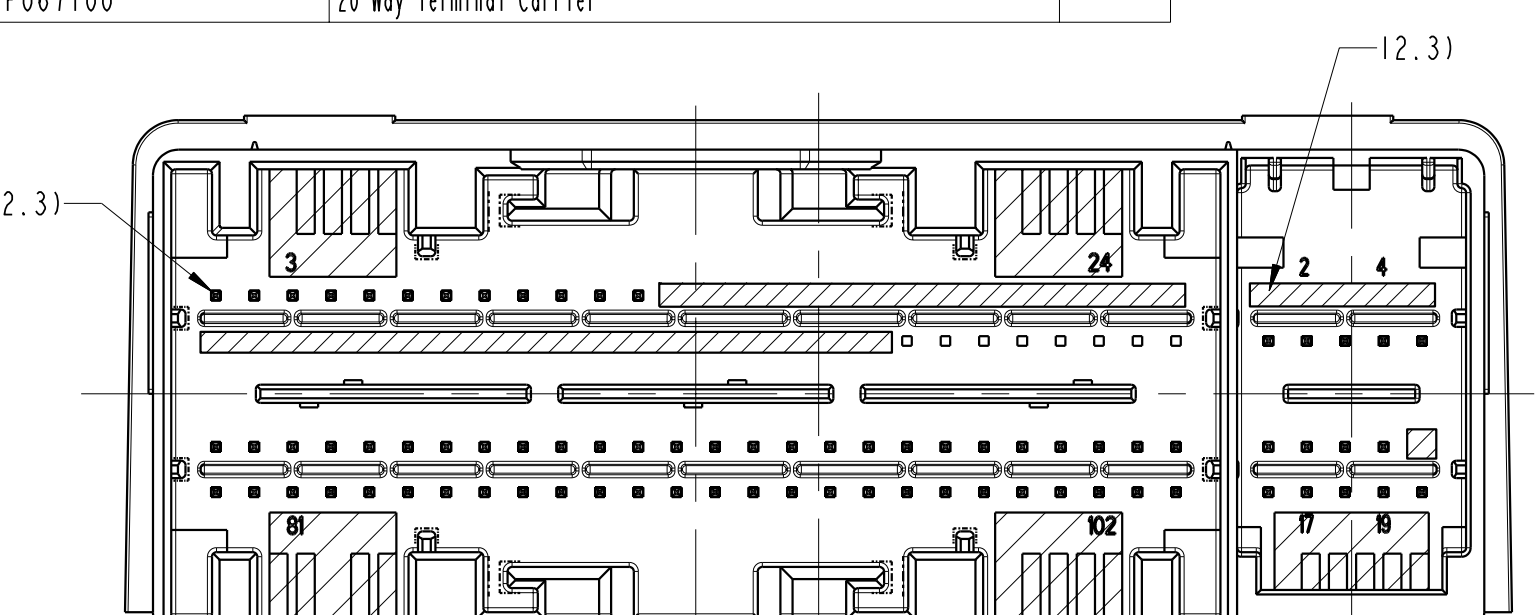

CODING E / POPULATED I I I		Mechanical Code For Header	
VARIANT XXX		CODE	V I V I I I I I
IN CAVITY: OPEN		STATUS	I I I I I I I I
OSCH PART NUMBER: 6002BE0334		Dim "X"	0.710 0.710 0.710
CI PART NUMBER: F193T00			
w PLATING THICKNESS 0.8um MIN.			
FCI Mating Component Part Description		Key Code	
F03T100	104 Way Terminal Carrier Holder and Wire Press Cover with Lever	E	
F42T100	52 Way Terminal Carrier Left		
F52T100	52 Way Terminal Carrier Right		
F04T100	20 Way Terminal Carrier Holder with CPA	A	
F93T100	20 Way Terminal Carrier		

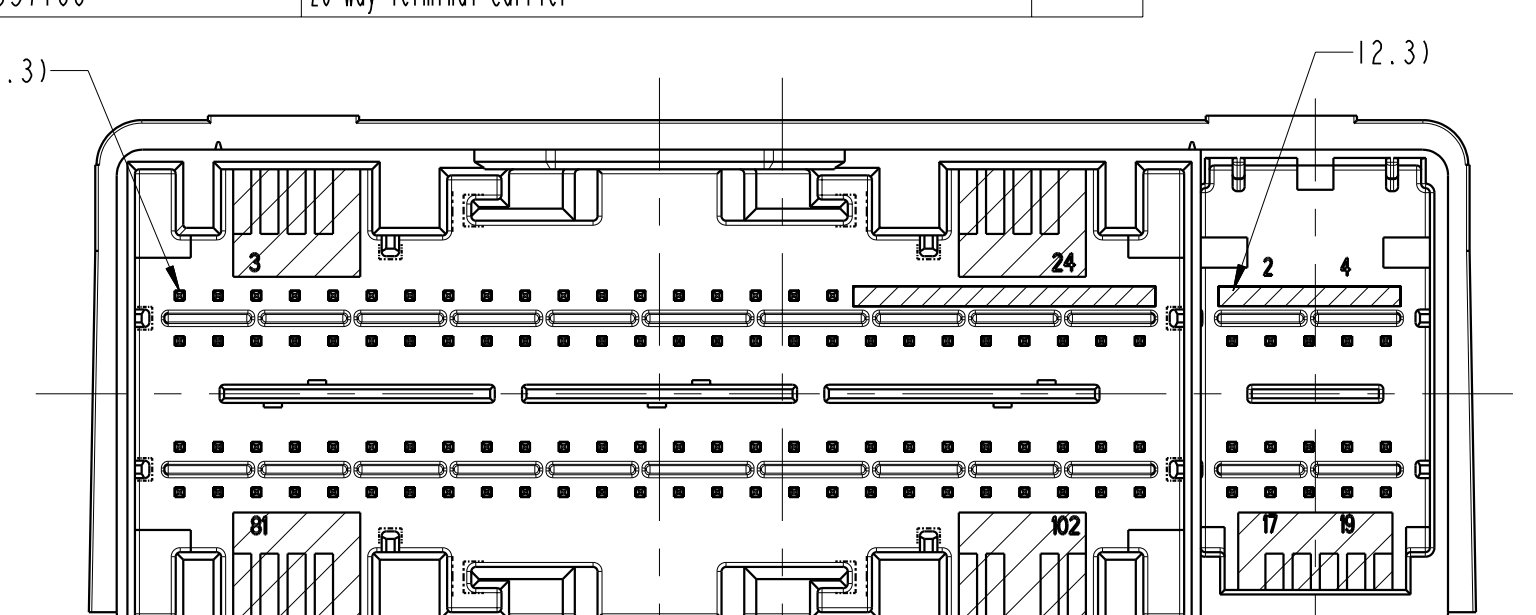

CODING C / POPULATED I01		Mechanical Code For Header							
VARIANT CONN-14		CODE		V	IV	II	I	I	I
PIN CAVITY: OPEN		STATUS		0	0	0	0	0	0
BOSCH PART NUMBER: 6002BE0242		Dim 'X'		0.7	0	0	0	0	0.7
FCI PART NUMBER: F247200									
AIR PLATING THICKNESS: 0.8µm MIN.									
FCI Mating Component Part No. Description		Key Code							
F245600	100 Way Terminal Carrier Holder and Wire Dress Cover with Lever	C							
F135800	50 Way Terminal Carrier Left								
F235600	50 Way Terminal Carrier Right								
F047100	20 Way Terminal Carrier Holder with CPA	A							
F027100	20 Way Terminal Carrier								

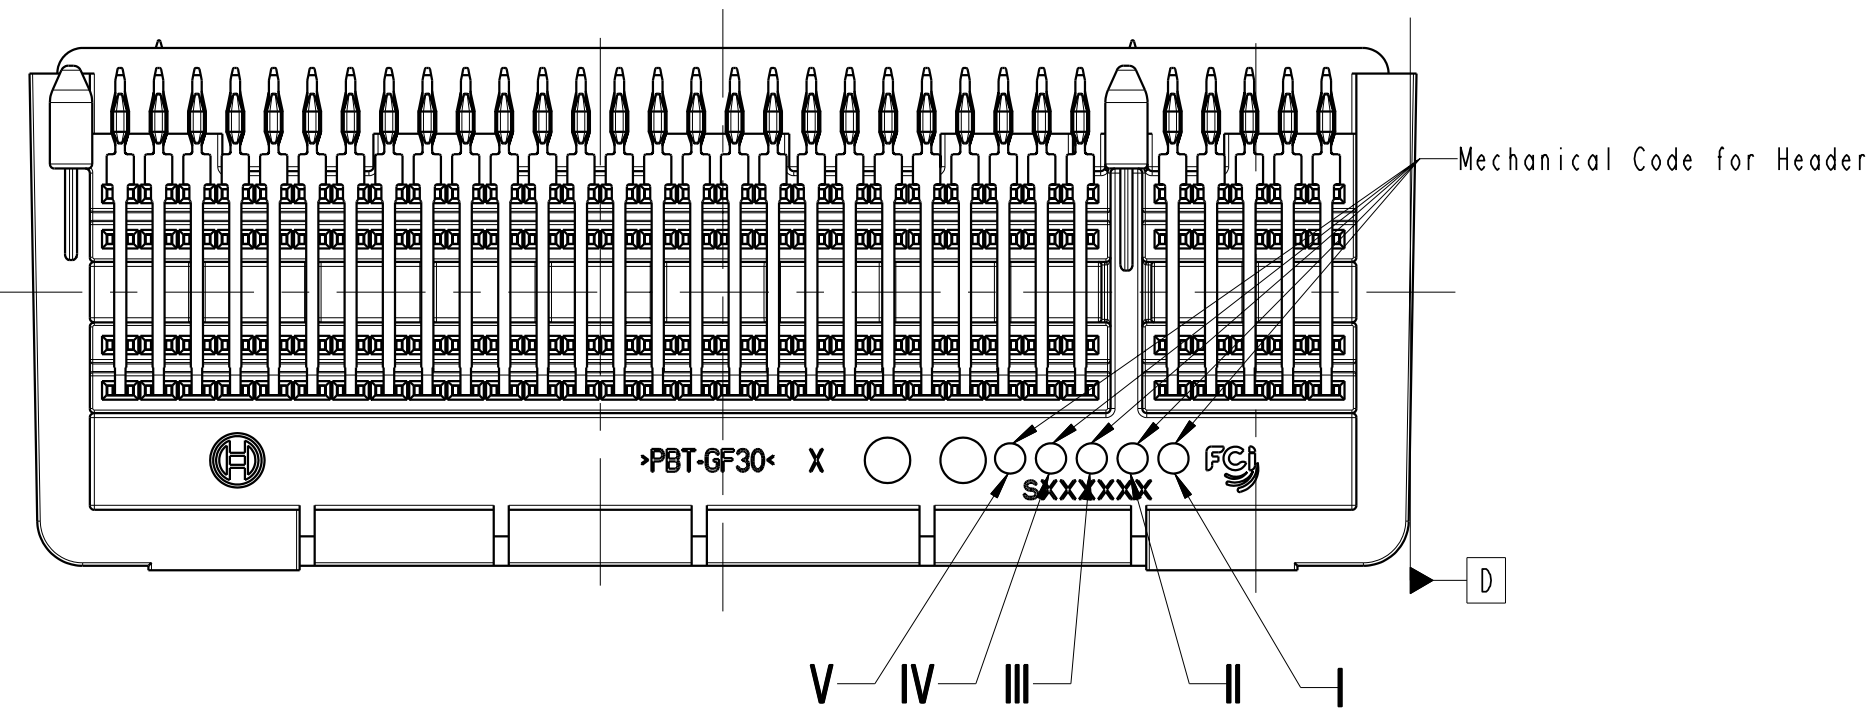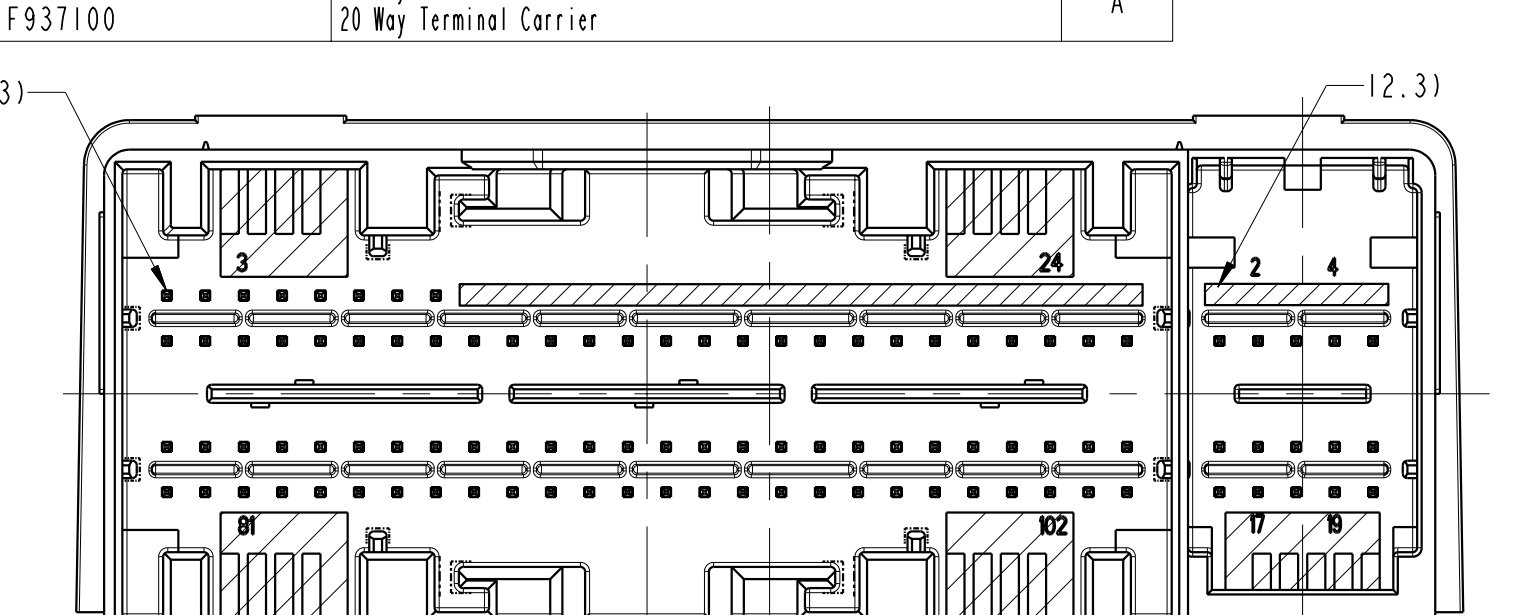

UNUSED/DEPOPULATED PINS

Mechanical Code For Header					
CODE STATUS	V	IV	III	II	I
Dim 'X'	0	0	0	0	1

0 - ABSENCE OF MECHANICAL CODE (I, II, III, IV OR V)
1 - PRESENCE OF MECHANICAL CODE (I, II, III, IV OR V)

[illegible]



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.