

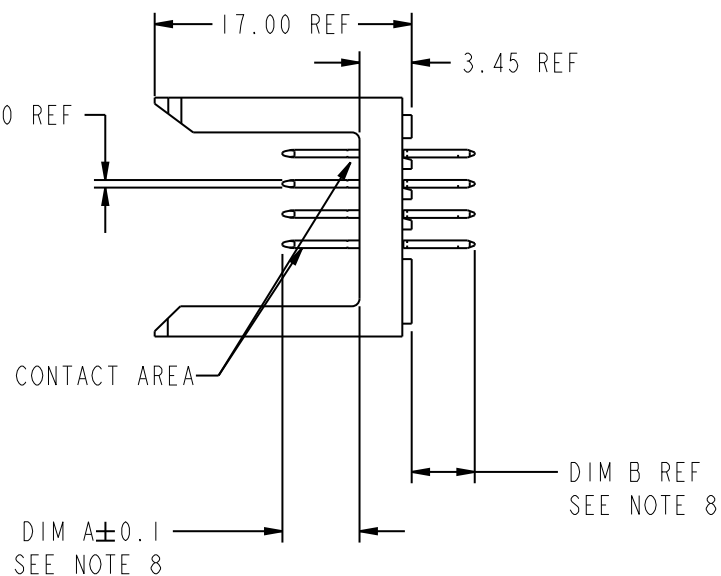
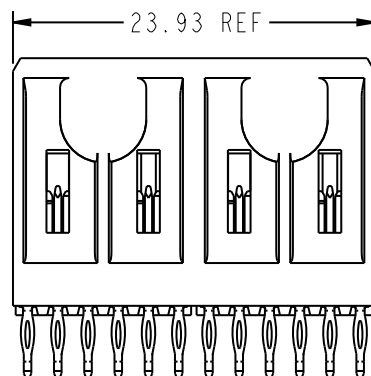


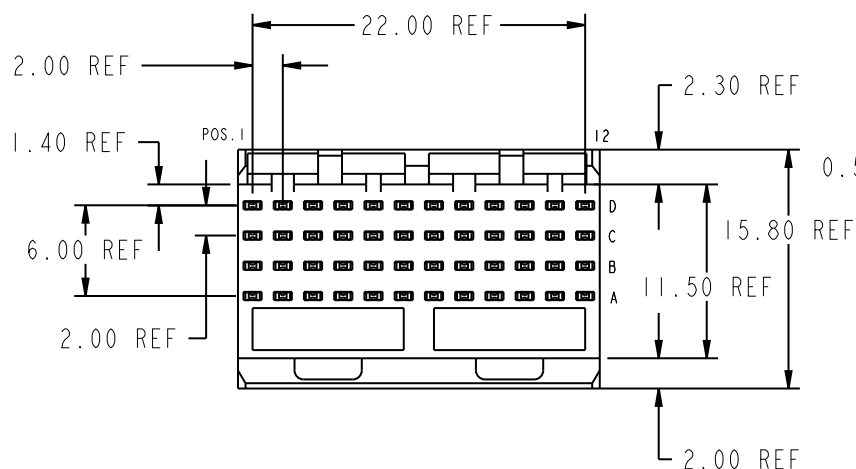

PRODUCT NUMBER
SEE TABLE



mat'l code				- -				tolerances unless otherwise specified		CUSTOMER					
ltr		ecn no.		dr		date		linear	0.X ±0.3		COPY		www.fciconnect.com		
AU		V06-0569		DCH		2006-06-13			0.XX ±0.13		projection		title		
AV		DG09-0256		TER		2009-08-19			.XXX ±.051				METRAL SIGNAL HEADER		
-		-		-		-		angles	0° ±2°				2 MOD, 4 ROW PRESS-FIT		
AP		V04-0913		HTB		09/09/04		dr	T.BRUNGARD 11/19/99				product family		
AR		V04-0990		DAI		09/30/04		enrg	M.STRAWSER 11/19/99				METRAL		
AS		V05-0053		TAB		02/17/05		chr	M.STRAWSER 11/19/99		scale		size	code	
AT		V05-0368		DPU		06/01/05		appd	M.STRAWSER 02/29/00		2:1		dwg no	213	
													88922	sheet	
sheet		revision		AV		AV		AV		AV		AV		AV	
index		sheet		1		2		3		4		5		6	

cage code 22526

Pro/E

PDM: Rev:AV


STATUS:Released

Printed: Jan 17, 2011




This document is the property of and embodies
CONFIDENTIAL and PROPRIETARY information of FCI.
No part of the information shown on this
document may be used in any way or disclosed
to others without the written consent of FCI.
Copyright FCI.

REV E - 2008-04-18

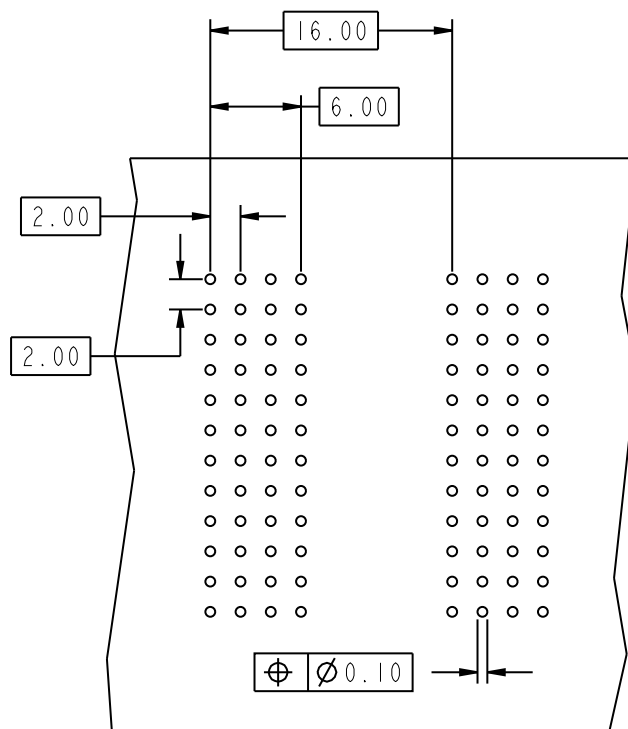

REQUIRED PC BOARD LAYOUT
COMPONENT SIDE
SEE PRINT 58351 FOR
ADDITIONAL PCB INFORMATION

KEY		
CODE	DIMENSIONS	
	DIM "A" MATE	DIM "B" TAIL
1	5.00	4.30
2	5.75	4.30
3	6.50	4.30
4	7.25	4.30
5	5.00	13.60
6	5.75	13.60
7	6.50	13.60
8	7.25	13.60
11	6.50	17.00
17	7.00	13.60
19	8.00	4.30
20	8.00	13.60
21	8.00	17.00
25	5.75	15.60
52	8.00	14.90
64	5.75	14.90
69	7.25	14.90

mat'l code				--		tolerances unless otherwise specified		CUSTOMER				www.fciconnect.com	
lfr	ecn no.	dr	date	linear	0.X ±0.3		COPY			title METRAL SIGNAL HEADER 2 MOD, 4 ROW PRESS-FIT			
AV					0.XX ±0.13								
					.XXX ±.051								
				angles	0° ±2°								
		dr			T.BRUNGARD	11/19/99			product family		METRAL	code	
		enrg			M.STRAWSE	11/19/99			size	dwg no	213		
		chr			M.STRAWSE	11/19/99			88922		sheet		
				appd	M.STRAWSE	02/29/00	scale 2:1		A				
sheet index	revision sheet												

cage code 22526

Pro/E

PDM: Rev:AV

STATUS:Released

Printed: Jan 17, 2011



PRODUCT NUMBER	DESCRIPTION	PLATING IN PRESS FIT TAIL AREA	PERFORMANCE LEVEL OF PLATING IN CONTACT AREA
88922-NIYY	STANDARD	TIN LEAD	TELCORDIA CO (NXT)
88922-N5YY	STANDARD	TIN LEAD	TELCORDIA UE (NXT)
88922-IYY	STANDARD	TIN LEAD	TELCORDIA CO
88922-2YY	STANDARD	TIN LEAD	TELECOM CLASS
88922-3YY	STANDARD	TIN LEAD	IEC CLASS I
88922-5YY	STANDARD	TIN LEAD	TELCORDIA UE
88922-NIYYLF	LEAD FREE	TIN	TELCORDIA CO (NXT), IEC CLASS I, SEE NOTES 9 AND 10
88922-N5YYLF	LEAD FREE	TIN	TELCORDIA UE (NXT) SEE NOTES 9 AND 10
88922-IYYLF	LEAD FREE	TIN	TELCORDIA CO, IEC CLASS I, SEE NOTES 9 AND 10
88922-2YYLF	LEAD FREE	TIN	TELECOM CLASS, SEE NOTES 9 AND 10
88922-5YYLF	LEAD FREE	TIN	TELCORDIA UE, SEE NOTES 9 AND 10

NOTES:

- FOR DIM A AND B SEE SHEET 2 AND UP.
- BODY MATERIAL: LIQUID CRYSTAL
POLYMER 30 % GLASS.
FLAME RETARDANT ACC. UL 94-V0.
- PIN MATERIAL:
PHOSPHOR BRONZE.
- PLATING ON PRESS-FIT TAIL AREA: SEE PRODUCT NUMBER TABLE. PLATING ON
CONTACT AREA CONFORMS TO PERFORMANCE LEVEL
SHOWN IN TABLE ON SHEET 3.
- PRODUCT MARKING:
PART NUMBER DESIGNATION & BATCH I.D.
- ALL PRODUCTS WITH PART NUMBERS SHOWN IN
SUBSEQUENT TABLES WILL BE PACKAGED IN TUBES.
IF TRAY PACKAGING IS REQUIRED, A SUFFIX "P"
WILL BE ADDED TO THE END OF THE PART NUMBER.
EXAMPLE: XXXXX-XXXP OR XXXXX-XXXPLF
- PRODUCT SPECIFICATION: GS-12-180
APPLICATION SPECIFICATION: BUS-20-073
- AFTER INSERTION INTO BOARD WITH QUALIFIED TOOLING.
- THE PRODUCTS WHERE THE PART NUMBER ENDS IN LF MEET THE
EUROPEAN UNION DIRECTIVE AND OTHER COUNTRY REGULATIONS
AS DESCRIBED IN GS-12-008.
- ALL THE PRODUCTS EXCEPT THOSE WITH PART NUMBERS
CONTAINING 88922-NI---OR 88922-N5---WILL WITHSTAND
EXPOSURE TO 260 DEGREES C FOR 60 SECONDS IN A
CONVECTION, INFRA-RED OR VAPOR PHASE
REFLOW OVEN. PART NUMBERS 88922-NI---AND 88922-N5---
WILL NOT WITHSTAND REFLOW AND THE A_u CONTACT SURFACE OF
THE CONTACTS SHALL BE EXPOSED TO A MAXIMUM 140 DEGREES
C FOR NO LONGER THAN 15 SECONDS IN A WAVE SOLDER
APPLICATION.

mat'l code		SEE NOTES		tolerances unless otherwise specified		CUSTOMER		FCJ www.fcjconnect.com	
lfr	ecn no.	dr	date	linear	0.X $\pm$ 0.3	COPY		title	
AV					0.XX $\pm$ 0.13	projection		METRAL SIGNAL HEADER	
				angles	.XXX $\pm$.051			2 MOD, 4 ROW PRESS-FIT	
				dr	T.BRUNGARD 11/19/99	MM		product family METRAL code	
				engr	x. xxxxxx mm/dd/yy			size	
				chr	M.STRAWSER 11/19/99	scale		dwg no 88922	
				appd	M.STRAWSER 02/29/00	11:1		sheet 213	
sheet index		revision sheet						3	



1 | 2

METRAL P/N	ROW	CONTACT CODE MOD. 1						MOD. 2					
		1	2	3	4	5	6	7	8	9	10	11	12
88922-X01 AND 88922-X01LF	D	-	2	-	2	-	2	-	2	-	2	-	2
	C	-	2	-	2	-	2	-	2	-	2	-	2
	B	-	2	-	2	-	2	-	2	-	2	-	2
	A	-	2	-	2	-	2	-	2	-	2	-	2

METRAL P/N	ROW	CONTACT CODE MOD. 1						MOD. 2					
		1	2	3	4	5	6	7	8	9	10	11	12
88922-X02 AND 88922-X02LF	D	-	6	-	6	-	6	-	6	-	6	-	6
	C	-	6	-	6	-	6	-	6	-	6	-	6
	B	-	6	-	6	-	6	-	6	-	6	-	6
	A	-	6	-	6	-	6	-	6	-	6	-	6

METRAL P/N	ROW	CONTACT CODE MOD. 1						MOD. 2					
		1	2	3	4	5	6	7	8	9	10	11	12
88922-X03 AND 88922-X03LF	D	2	2	2	2	2	1	1	2	2	2	2	2
	C	2	2	2	2	2	2	2	2	2	2	2	2
	B	2	2	2	2	2	2	2	2	2	2	2	2
	A	2	2	2	2	2	3	3	2	2	2	2	2

METRAL P/N	ROW	CONTACT CODE MOD. 1						MOD. 2					
		1	2	3	4	5	6	7	8	9	10	11	12
88922-X04 AND 88922-X04LF	D	-	-	2	2	-	-	2	2	2	2	2	2
	C	2	2	2	2	2	2	2	2	2	2	2	2
	B	2	2	2	2	2	2	2	2	2	2	2	2
	A	-	-	-	-	-	-	4	4	4	4	19	19

METRAL P/N	ROW	CONTACT CODE MOD. 1						MOD. 2					
		1	2	3	4	5	6	7	8	9	10	11	12
88922-X05 AND 88922-X05LF	D	25	25	25	25	25	25	25	25	25	25	25	25
	C	25	25	25	25	25	25	25	25	25	25	25	25
	B	25	25	25	25	25	25	25	25	25	25	25	25
	A	25	25	25	25	25	25	25	25	25	25	25	25

METRAL P/N	ROW	CONTACT CODE MOD. 1						MOD. 2					
		1	2	3	4	5	6	7	8	9	10	11	12
88922-X06 AND 88922-X06LF	D	6	6	6	6	20	20	20	6	6	6	20	20
	C	6	6	6	6	20	20	20	6	6	6	20	20
	B	6	6	6	6	20	20	20	6	6	6	20	20
	A	6	6	6	6	20	20	20	6	6	6	20	20

METRAL P/N	ROW	CONTACT CODE MOD. 1						MOD. 2					
		1	2	3	4	5	6	7	8	9	10	11	12
88922-X07 AND 88922-X07LF	D	2	3	2	2	2	2	2	2	2	2	2	2
	C	2	3	2	2	2	2	2	2	2	2	2	2
	B	2	3	1	2	2	2	2	2	2	2	2	2
	A	2	3	2	2	2	2	2	2	2	2	2	2

METRAL P/N	ROW	CONTACT CODE MOD. 1						MOD. 2					
		1	2	3	4	5	6	7	8	9	10	11	12
88922-X08 AND 88922-X08LF	D	1	1	1	1	1	1	1	1	1	19	19	19
	C	1	1	1	1	1	1	1	1	1	19	19	19
	B	1	1	1	1	1	1	1	1	1	19	19	19
	A	1	1	1	1	1	1	1	1	1	19	19	19


3 |

METRAL P/N	ROW	CONTACT CODE MOD. 1						MOD. 2					
		1	2	3	4	5	6	7	8	9	10	11	12
88922-X09 AND 88922-X09LF	D	1	3	1	1	1	1	1	1	1	1	1	1
	C	1	3	1	1	1	1	1	1	1	1	1	1
	B	1	3	1	1	1	1	1	1	1	1	1	1
	A	1	3	1	1	1	1	1	1	1	1	1	1

METRAL P/N	ROW	CONTACT CODE MOD. 1						MOD. 2					
		1	2	3	4	5	6	7	8	9	10	11	12
88922-X10 AND 88922-X10LF	D	-	-	6	6	-	-	6	6	6	6	6	6
	C	6	6	6	6	6	6	6	6	6	6	6	6
	B	6	6	6	6	6	6	6	6	6	6	6	6
	A	-	-	-	-	-	-	8	8	8	8	20	20

METRAL P/N	ROW	CONTACT CODE MOD. 1						MOD. 2					
		1	2	3	4	5	6	7	8	9	10	11	12
88922-X11 AND 88922-X11LF	D	19	1	1	1	1	19	1	19	1	19	1	19
	C	3	1	1	1	1	19	19	1	19	1	19	1
	B	3	1	1	1	1	19	1	19	1	19	1	19
	A	3	1	1	1	1	19	19	1	19	1	19	1

METRAL P/N	ROW	CONTACT CODE MOD. 1						MOD. 2					
		1	2	3	4	5	6	7	8	9	10	11	12
88922-X12 AND 88922-X12LF	D	1	1	1	1	1	1	1	1	1	1	3	3
	C	1	1	1	1	1	1	1	1	1	1	3	3
	B	1	1	1	1	1	1	1	1	1	1	3	3
	A	1	1	1	1	1	1	1	1	1	1	3	3

mat'l code				tolerances unless otherwise specified				CUSTOMER		 www.fcjconnect.com						
lfr	ecn no.	dr	date	linear	0. X ±0.3		projection	COPY			title					
AV					0. XX ±0.13						METRAL SIGNAL HEADER					
					.XXX ±.051						2 MOD, 4 ROW PRESS-FIT					
					0° ±2°											
				dr	T.BRUNGARD 11/19/99					scale	product family		code			
				enrg	M.STRAWSER 11/19/99						METRAL					
				chr	M.STRAWSER 11/19/99						size					
				appd	M.STRAWSER 02/29/00						dwg no					
sheet index		revision sheet									88922		213			
													sheet 4			

mat'l code				tolerances unless otherwise specified				CUSTOMER		FCI www.fciconnect.com	
lfr	ecn no.	dr	date	linear	0.X ±0.3			COPY			
AV					0.XX ±0.13			projection			
					.XXX ±.051						
				angles	0° ±2°					title METRAL SIGNAL HEADER 2 MOD, 4 ROW PRESS-FIT	
				dr	T.BRUNGARD	11/19/99			product family		METRAL
				enrg	M.STRAWSE	11/19/99			size		dwg no
				chr	M.STRAWSE	11/19/99			A		88922
				appd	M.STRAWSE	02/29/00			sheet		4
sheet index		revision sheet									



METRAL P/N	ROW	CONTACT CODE MOD. 1					MOD. 2				
		1	2	3	4	5	6	7	8	9	10
88922-X13 AND 88922-X13LF	D	20	-	7	7	7	7	7	7	7	-
	C	20	-	7	7	7	7	7	7	7	-
	B	20	-	7	7	7	7	7	7	7	-
	A	20	-	7	7	7	7	7	7	7	-

METRAL P/N	ROW	CONTACT CODE MOD. 1					MOD. 2				
		1	2	3	4	5	6	7	8	9	10
88922-X17 AND 88922-X17LF	D	-	6	-	6	-	6	-	6	-	6
	C	-	-	-	-	-	-	-	-	-	-
	B	-	-	-	-	-	-	-	-	-	-
	A	-	6	-	6	-	6	-	6	-	6

METRAL P/N	ROW	CONTACT CODE MOD. 1					MOD. 2				
		1	2	3	4	5	6	7	8	9	10
88922-X21 AND 88922-X21LF	D	20	-	7	-	7	-	7	-	7	-
	C	20	-	-	7	-	7	-	7	-	7
	B	20	-	7	-	7	-	7	-	7	-
	A	20	-	-	7	-	7	-	7	-	7

METRAL P/N	ROW	CONTACT CODE MOD. 1					MOD. 2				
		1	2	3	4	5	6	7	8	9	10
88922-X14 AND 88922-X14LF	D	19	3	3	3	3	3	3	3	3	19
	C	19	3	3	3	3	3	3	3	3	19
	B	19	3	3	3	3	3	3	3	3	19
	A	19	3	3	3	3	3	3	3	3	19

METRAL P/N	ROW	CONTACT CODE MOD. 1					MOD. 2				
		1	2	3	4	5	6	7	8	9	10
88922-X18 AND 88922-X18LF	D	1	1	1	4	1	1	3	3	4	-
	C	1	1	1	4	1	1	3	3	4	-
	B	1	1	1	4	1	1	3	3	4	-
	A	1	1	1	4	1	1	3	3	4	-

METRAL P/N	ROW	CONTACT CODE MOD. 1					MOD. 2				
		1	2	3	4	5	6	7	8	9	10
88922-X22 AND 88922-X22LF	D	2	2	2	6	6	6	6	6	6	2
	C	2	2	2	6	6	6	6	6	6	2
	B	2	2	2	6	6	6	6	6	6	2
	A	2	2	2	6	6	6	6	6	6	2

METRAL P/N	ROW	CONTACT CODE MOD. 1					MOD. 2				
		1	2	3	4	5	6	7	8	9	10
88922-X15 AND 88922-X15LF	D	7	5	5	5	5	5	5	5	5	7
	C	7	5	5	5	5	5	5	5	5	7
	B	7	5	5	5	5	5	5	5	5	7
	A	7	5	5	5	5	5	5	5	5	7

METRAL P/N	ROW	CONTACT CODE MOD. 1					MOD. 2				
		1	2	3	4	5	6	7	8	9	10
88922-X19 AND 88922-X19LF	D	1	2	2	2	2	2	2	2	2	4
	C	1	2	2	2	2	2	2	2	2	4
	B	1	2	2	2	2	2	2	2	2	4
	A	1	2	2	2	2	2	2	2	2	4

METRAL P/N	ROW	CONTACT CODE MOD. 1					MOD. 2				
		1	2	3	4	5	6	7	8	9	10
88922-X23 AND 88922-X23LF	D	19	3	3	3	3	3	19	3	3	3
	C	19	3	3	3	3	3	19	3	3	3
	B	19	3	3	3	3	3	19	3	3	3
	A	19	3	3	3	3	3	19	3	3	3

METRAL P/N	ROW	CONTACT CODE MOD. 1					MOD. 2				
		1	2	3	4	5	6	7	8	9	10
88922-X16 AND 88922-X16LF	D	-	2	-	2	-	2	-	2	-	2
	C	-	-	-	-	-	-	-	-	-	-
	B	-	-	-	-	-	-	-	-	-	-
	A	-	2	-	2	-	2	-	2	-	2

METRAL P/N	ROW	CONTACT CODE MOD. 1					MOD. 2				
		1	2	3	4	5	6	7	8	9	10
88922-X20 AND 88922-X20LF	D	21	-	11	-	11	-	11	-	11	-
	C	21	-	-	11	-	11	-	11	-	11
	B	21	-	11	-	11	-	11	-	11	-
	A	21	-	-	11	-	11	-	11	-	11

METRAL P/N	ROW	CONTACT CODE MOD. 1					MOD. 2				
		1	2	3	4	5	6	7	8	9	10
88922-X24 AND 88922-X24LF	D	7	-	7	-	7	-	7	-	7	-
	C	-	7	-	7	-	7	-	7	-	7
	B	7	-	7	-	7	-	7	-	7	-
	A	-	7	-	7	-	7	-	7	-	7

mat'l code				tolerances unless otherwise specified				CUSTOMER		FCi www.fciconnect.com	
lfr	ecn no.	dr	date	linear	0.X ±0.3			COPY		title	
AV					0.XX ±0.13			projection		METRAL SIGNAL HEADER	
					.XXX ±.051					2 MOD, 4 ROW PRESS FIT	
				angles	0° ±2°					product family	
				dr	T.BRUNGARD 11/19/99			MM		METRAL	
				enr	M.STRAWSE 11/19/99					code	
				chr	M.STRAWSE 11/19/99			scale		213	
				appd	M.STRAWSE 02/29/00			1:1		sheet	
sheet index		revision sheet								5	



METRAL P/N	ROW	CONTACT CODE MOD. 1					MOD. 2				
		1	2	3	4	5	6	7	8	9	10
88922-X25 AND 88922-X25LF	D	3	3	3	3	3	3	-	3	3	3
	C	3	3	3	3	3	3	-	3	3	3
	B	3	3	3	3	3	3	-	3	3	3
	A	3	3	3	3	3	3	-	3	3	3

METRAL P/N	ROW	CONTACT CODE MOD. 1					MOD. 2				
		1	2	3	4	5	6	7	8	9	10
88922-X26 AND 88922-X26LF	D	19	3	3	3	3	3	19	3	3	3
	C	19	3	3	3	3	3	19	3	3	3
	B	19	3	3	3	3	3	19	3	3	3
	A	19	3	3	3	3	3	19	3	3	3

METRAL P/N	ROW	CONTACT CODE MOD. 1					MOD. 2				
		1	2	3	4	5	6	7	8	9	10
88922-X27 AND 88922-X27LF	D	3	-	3	-	3	-	3	-	3	-
	C	-	3	-	3	-	3	-	3	-	3
	B	3	-	3	-	3	-	3	-	3	-
	A	-	3	-	3	-	3	-	3	-	3

METRAL P/N	ROW	CONTACT CODE MOD. 1					MOD. 2				
		1	2	3	4	5	6	7	8	9	10
88922-X28 AND 88922-X28LF	D	19	-	3	-	3	-	3	-	3	-
	C	19	-	3	-	3	-	3	-	3	-
	B	19	-	3	-	3	-	3	-	3	-
	A	19	-	3	-	3	-	3	-	3	-

METRAL P/N	ROW	CONTACT CODE MOD. 1					MOD. 2				
		1	2	3	4	5	6	7	8	9	10
88922-X29 AND 88922-X29LF	D	-	7	-	7	-	7	-	7	-	7
	C	7	-	7	-	7	-	7	-	7	-
	B	-	7	-	7	-	7	-	7	-	7
	A	7	-	7	-	7	-	7	-	7	-

METRAL P/N	ROW	CONTACT CODE MOD. 1					MOD. 2				
		1	2	3	4	5	6	7	8	9	10
88922-X30 AND 88922-X30LF	D	-	17	-	17	-	17	-	17	-	17
	C	17	-	17	-	17	-	17	-	17	-
	B	-	17	-	17	-	17	-	17	-	17
	A	17	-	17	-	17	-	17	-	17	-

METRAL P/N	ROW	CONTACT CODE MOD. 1					MOD. 2				
		1	2	3	4	5	6	7	8	9	10
88922-X31 AND 88922-X31LF	D	3	3	2	3	3	2	4	4	2	2
	C	3	3	2	3	3	2	4	4	2	2
	B	3	3	2	3	3	2	4	4	2	2
	A	3	3	2	3	3	2	4	4	2	2

METRAL P/N	ROW	CONTACT CODE MOD. 1					MOD. 2				
		1	2	3	4	5	6	7	8	9	10
88922-X32 AND 88922-X32LF	D	-	-	6	6	-	20	6	6	6	6
	C	6	6	6	6	6	6	6	6	6	6
	B	6	6	6	6	6	6	6	6	6	6
	A	-	-	-	-	-	8	8	8	8	20

METRAL P/N	ROW	CONTACT CODE MOD. 1					MOD. 2				
		1	2	3	4	5	6	7	8	9	10
88922-X33 AND 88922-X33LF	D	-	-	64	64	-	52	64	64	64	64
	C	64	64	64	64	64	64	64	64	64	64
	B	64	64	64	64	64	64	64	64	64	64
	A	-	-	-	-	-	69	69	69	69	52

METRAL P/N	ROW	CONTACT CODE MOD. 1					MOD. 2				
		1	2	3	4	5	6	7	8	9	10
88922-X34 AND 88922-X34LF	D	7	6	6	6	6	6	6	6	6	5
	C	7	6	6	6	6	6	6	6	6	5
	B	7	6	6	6	6	6	6	6	6	5
	A	7	6	6	6	6	6	6	6	6	5

METRAL P/N	ROW	CONTACT CODE MOD. 1					MOD. 2				
		1	2	3	4	5	6	7	8	9	10
88922-X35 AND 88922-X35LF	D	2	2	2	2	2	2	2	2	2	2
	C	2	2	2	2	2	2	2	2	2	2
	B	2	2	2	2	2	2	2	2	2	2
	A	4	4	4	4	19	19	4	4	4	19

METRAL P/N	ROW	CONTACT CODE MOD. 1					MOD. 2				
		1	2	3	4	5	6	7	8	9	10
88922-X36 AND 88922-X36LF	D	7	7	7	7	6	7	6	7	6	7
	C	7	7	7	7	7	7	7	7	7	7
	B	7	7	7	7	7	7	7	7	7	7
	A	7	7	7	7	7	7	7	7	7	7


mat'l code				tolerances unless otherwise specified				CUSTOMER		FCJ www.fcjconnect.com		
lfr	ecn no.	dr	date	linear	0.X ±0.3			projection	COPY			
AV					0.XX ±0.13							
					.XXX ±.051							
				angles	0° ±2°			MM	title			
				dr	T.BRUNGARD	11/19/99	METRAL SIGNAL HEADER					
				engr	M.STRAWSE	11/19/99	2 MOD, 4 ROW PRESS-FIT					
				chr	M.STRAWSE	11/19/99	scale	A	product family		code	
				appd	M.STRAWSE	02/29/00			METRAL		213	
sheet index		revision sheet						size		dwg no	sheet	
								A		88922	6	
										cage code		
										22526		

This document is the property of and embodies
CONFIDENTIAL and PROPRIETARY information of FCI.
No part of the information shown on this
document may be used in any way or disclosed
to others without the written consent of FCI.
Copyright FCI.



METRAL P/N	ROW	CONTACT CODE MOD. 1						MOD. 2					
		1	2	3	4	5	6	7	8	9	10	11	12
88922-X37 AND 88922-X37LF	D	3	3	3	3	3	3	3	3	3	3	3	3
	C	3	3	3	3	3	3	3	3	3	3	3	3
	B	3	3	3	3	3	3	3	1	3	3	3	3
	A	3	3	3	3	3	3	3	3	3	3	3	3

METRAL P/N	ROW	CONTACT CODE MOD. 1						MOD. 2					
		1	2	3	4	5	6	7	8	9	10	11	12
88922-X38 AND 88922-X38LF	D	3	3	1	9	3	3	3	3	3	3	3	3
	C	3	3	1	9	3	3	3	3	3	3	3	3
	B	3	3	3	3	3	3	3	1	3	3	3	3
	A	3	3	3	3	3	3	3	3	3	3	3	3

mat'l code				--		tolerances unless otherwise specified		CUSTOMER		 www.fciconnect.com			
lfr	ecn no.	dr	date	linear	0.X ±0.3		COPY						
AV					0.XX ±0.13		projection						
					.XXX ±.051								
				angles	0° ±2°				title METRAL SIGNAL HEADER 2 MOD, 4 ROW PRESS-FIT				
				dr	T.BRUNGARD	11/19/99	product family					METRAL	
				enrg	M.STRAWSER	11/19/99	size					A	
				chr	M.STRAWSER	11/19/99	scale		1:1		code 213		
				appd	M.STRAWSER	02/29/00					sheet 7		
sheet index		revision sheet											



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.