

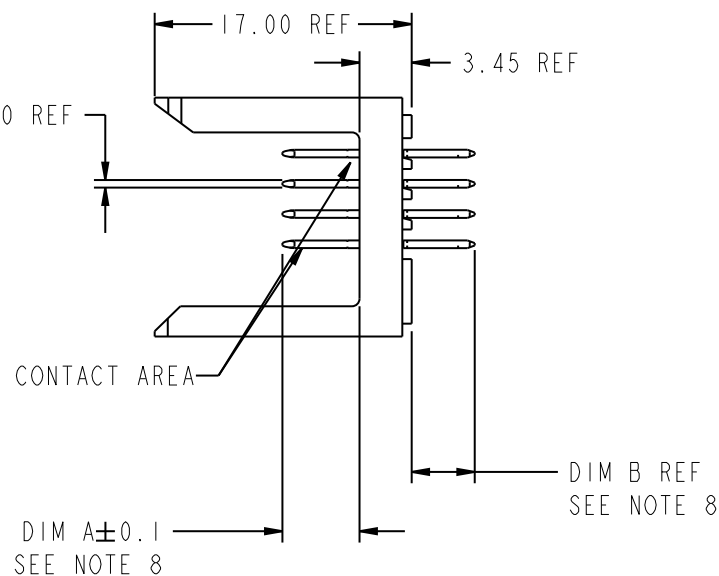


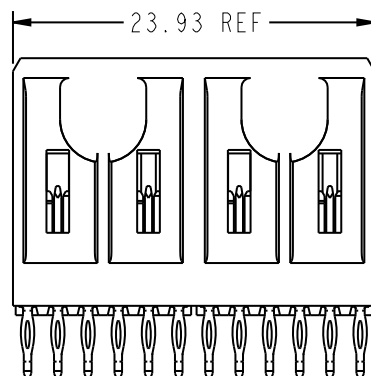

PRODUCT NUMBER
SEE TABLE

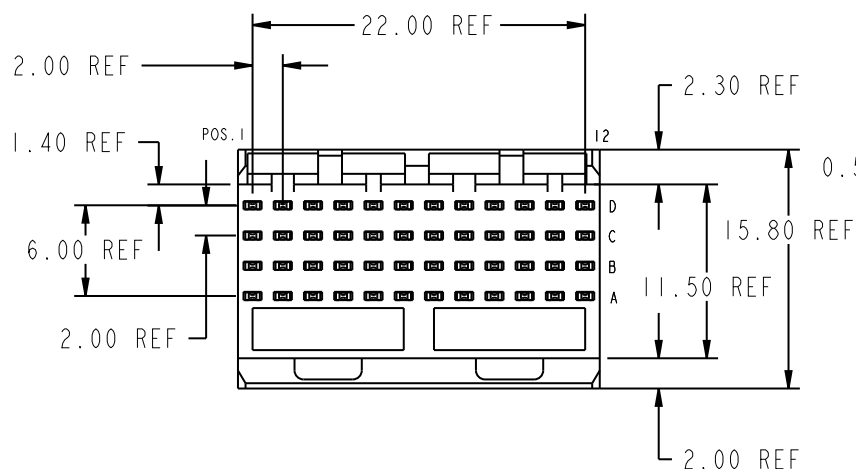

mat'l code				- -		tolerances unless otherwise specified		CUSTOMER		FCI www.fciconnect.com	
ltr	ecn no.	dr	date	linear	0.X ±0.3		projection 	COPY	title METRAL SIGNAL HEADER 2 MOD, 4 ROW PRESS-FIT		
AU	V06-0569	DCH	2006-06-13		0.XX ±0.13						
AV	DG09-0256	TER	2009-08-19		.XXX ±.051						
-	-	-	-	angles	0° ±2°		 scale 2:1		product family METRAL	code 213 sheet 1 of 7	
AP	V04-0913	HTB	09/09/04	dr	T.BRUNGARD	11/19/99					
AR	V04-0990	DAI	09/30/04	enrg	M.STRAWSE	11/19/99					
AS	V05-0053	TAB	02/17/05	chr	M.STRAWSE	11/19/99					
AT	V05-0368	DPU	06/01/05	appd	M.STRAWSE	02/29/00			size A	dwg no 88922	
sheet index		revision sheet	AV 1	AV 2	AV 3	AV 4	AV 5	AV 6	AV 7		


cage code 22526

Pro/E

PDM: Rev:AV

STATUS:Released

Printed: Jan 17, 2011

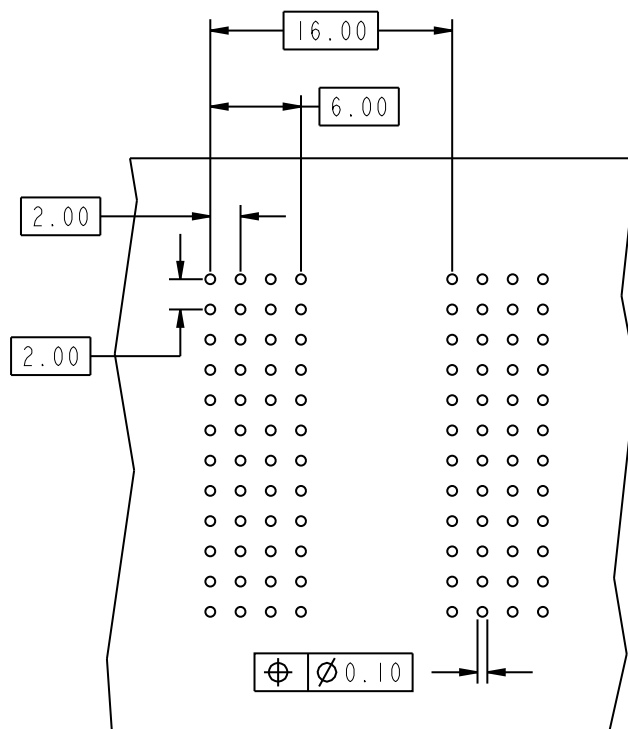

REQUIRED PC BOARD LAYOUT
 COMPONENT SIDE
 SEE PRINT 58351 FOR
 ADDITIONAL PCB INFORMATION

KEY		
CODE	DIMENSIONS	
	DIM "A" MATE	DIM "B" TAIL
1	5.00	4.30
2	5.75	4.30
3	6.50	4.30
4	7.25	4.30
5	5.00	13.60
6	5.75	13.60
7	6.50	13.60
8	7.25	13.60
11	6.50	17.00
17	7.00	13.60
19	8.00	4.30
20	8.00	13.60
21	8.00	17.00
25	5.75	15.60
52	8.00	14.90
64	5.75	14.90
69	7.25	14.90

mat'l code				tolerances unless otherwise specified				CUSTOMER		FCi www.fciconnect.com				
lfr	ecm no.	dr	date	linear	0. X ± 0.3			COPY		projection				
AV					0. XX ± 0.13									
					. XXX $\pm .051$									
				angles	0° $\pm 2^\circ$			MM		title METRAL SIGNAL HEADER 2 MOD, 4 ROW PRESS-FIT				
				dr	T.BRUNGARD	11/19/99								
				enrg	M.STRAWSE	11/19/99								
				chr	M.STRAWSE	11/19/99	scale		product family		METRAL		code	
				appd	M.STRAWSE	02/29/00	2:1		size		dwg no		213	
									A		88922		sheet	
													2	
sheet		revision												
index		sheet												



PRODUCT NUMBER	DESCRIPTION	PLATING IN PRESS FIT TAIL AREA	PERFORMANCE LEVEL OF PLATING IN CONTACT AREA
88922-NIYY	STANDARD	TIN LEAD	TELCORDIA CO (NXT)
88922-N5YY	STANDARD	TIN LEAD	TELCORDIA UE (NXT)
88922-IYY	STANDARD	TIN LEAD	TELCORDIA CO
88922-2YY	STANDARD	TIN LEAD	TELECOM CLASS
88922-3YY	STANDARD	TIN LEAD	IEC CLASS I
88922-5YY	STANDARD	TIN LEAD	TELCORDIA UE
88922-NIYYLF	LEAD FREE	TIN	TELCORDIA CO (NXT), IEC CLASS I, SEE NOTES 9 AND 10
88922-N5YYLF	LEAD FREE	TIN	TELCORDIA UE (NXT) SEE NOTES 9 AND 10
88922-IYYLF	LEAD FREE	TIN	TELCORDIA CO, IEC CLASS I, SEE NOTES 9 AND 10
88922-2YYLF	LEAD FREE	TIN	TELECOM CLASS, SEE NOTES 9 AND 10
88922-5YYLF	LEAD FREE	TIN	TELCORDIA UE, SEE NOTES 9 AND 10

NOTES:

- FOR DIM A AND B SEE SHEET 2 AND UP.
- BODY MATERIAL: LIQUID CRYSTAL
POLYMER 30 % GLASS.
FLAME RETARDANT ACC. UL 94-V0.
- PIN MATERIAL:
PHOSPHOR BRONZE.
- PLATING ON PRESS-FIT TAIL AREA: SEE PRODUCT NUMBER TABLE. PLATING ON
CONTACT AREA CONFORMS TO PERFORMANCE LEVEL
SHOWN IN TABLE ON SHEET3.
- PRODUCT MARKING:
PART NUMBER DESIGNATION & BATCH I.D.
- ALL PRODUCTS WITH PART NUMBERS SHOWN IN
SUBSEQUENT TABLES WILL BE PACKAGED IN TUBES.
IF TRAY PACKAGING IS REQUIRED, A SUFFIX "P"
WILL BE ADDED TO THE END OF THE PART NUMBER.
EXAMPLE: XXXXX-XXXP OR XXXXX-XXXPLF
- PRODUCT SPECIFICATION: GS-12-180
APPLICATION SPECIFICATION: BUS-20-073
- AFTER INSERTION INTO BOARD WITH QUALIFIED TOOLING.
- THE PRODUCTS WHERE THE PART NUMBER ENDS IN LF MEET THE
EUROPEAN UNION DIRECTIVE AND OTHER COUNTRY REGULATIONS
AS DESCRIBED IN GS-12-008.
- ALL THE PRODUCTS EXCEPT THOSE WITH PART NUMBERS
CONTAINING 88922-NI---OR 88922-N5---WILL WITHSTAND
EXPOSURE TO 260 DEGREES C FOR 60 SECONDS IN A
CONVECTION, INFRA-RED OR VAPOR PHASE
REFLOW OVEN. PART NUMBERS 88922-NI---AND 88922-N5---
WILL NOT WITHSTAND REFLOW AND THE Au CONTACT SURFACE OF
THE CONTACTS SHALL BE EXPOSED TO A MAXIMUM 140 DEGREES
C FOR NO LONGER THAN 15 SECONDS IN A WAVE SOLDER
APPLICATION.

mat'l code		SEE NOTES		tolerances unless otherwise specified		CUSTOMER		FCI www.fciconnect.com	
lfr	ecn no.	dr	date	linear	0.X ±0.3	COPY		title	
AV					0.XX ±0.13	projection		METRAL SIGNAL HEADER	
				angles	.XXX ±.051	MM		2 MOD, 4 ROW PRESS-FIT	
				dr	T.BRUNGARD 11/19/99	scale		product family	
				enrg	x. xxxxxx mm/dd/yy	11:1		METRAL	
				chr	M.STRAWSER 11/19/99			code	
				appd	M.STRAWSER 02/29/00			213	
sheet		revision						sheet	
index		sheet						3	



METRAL P/N	ROW	CONTACT CODE MOD. 1					MOD. 2				
		1	2	3	4	5	6	7	8	9	10
88922-X01 AND 88922-X01LF	D	-	2	-	2	-	2	-	2	-	2
	C	-	2	-	2	-	2	-	2	-	2
	B	-	2	-	2	-	2	-	2	-	2
	A	-	2	-	2	-	2	-	2	-	2

METRAL P/N	ROW	CONTACT CODE MOD. 1					MOD. 2				
		1	2	3	4	5	6	7	8	9	10
88922-X02 AND 88922-X02LF	D	-	6	-	6	-	6	-	6	-	6
	C	-	6	-	6	-	6	-	6	-	6
	B	-	6	-	6	-	6	-	6	-	6
	A	-	6	-	6	-	6	-	6	-	6

METRAL P/N	ROW	CONTACT CODE MOD. 1					MOD. 2				
		1	2	3	4	5	6	7	8	9	10
88922-X03 AND 88922-X03LF	D	2	2	2	2	2	1	1	2	2	2
	C	2	2	2	2	2	2	2	2	2	2
	B	2	2	2	2	2	2	2	2	2	2
	A	2	2	2	2	2	3	3	2	2	2

METRAL P/N	ROW	CONTACT CODE MOD. 1					MOD. 2				
		1	2	3	4	5	6	7	8	9	10
88922-X04 AND 88922-X04LF	D	-	-	2	-	-	2	2	2	2	2
	C	2	2	2	2	2	2	2	2	2	2
	B	2	2	2	2	2	2	2	2	2	2
	A	-	-	-	-	-	4	4	4	4	19

METRAL P/N	ROW	CONTACT CODE MOD. 1					MOD. 2				
		1	2	3	4	5	6	7	8	9	10
88922-X05 AND 88922-X05LF	D	25	25	25	25	25	25	25	25	25	25
	C	25	25	25	25	25	25	25	25	25	25
	B	25	25	25	25	25	25	25	25	25	25
	A	25	25	25	25	25	25	25	25	25	25

METRAL P/N	ROW	CONTACT CODE MOD. 1					MOD. 2				
		1	2	3	4	5	6	7	8	9	10
88922-X06 AND 88922-X06LF	D	6	6	6	20	20	20	6	6	6	20
	C	6	6	6	20	20	20	6	6	6	20
	B	6	6	6	20	20	20	6	6	6	20
	A	6	6	6	20	20	20	6	6	6	20

METRAL P/N	ROW	CONTACT CODE MOD. 1					MOD. 2				
		1	2	3	4	5	6	7	8	9	10
88922-X07 AND 88922-X07LF	D	2	3	2	2	2	2	2	2	2	2
	C	2	3	2	2	2	2	2	2	2	2
	B	2	3	1	2	2	2	2	2	2	2
	A	2	3	2	2	2	2	2	2	2	2

METRAL P/N	ROW	CONTACT CODE MOD. 1					MOD. 2				
		1	2	3	4	5	6	7	8	9	10
88922-X08 AND 88922-X08LF	D	1	1	1	1	1	1	1	1	19	19
	C	1	1	1	1	1	1	1	1	19	19
	B	1	1	1	1	1	1	1	1	19	19
	A	1	1	1	1	1	1	1	1	19	19

METRAL P/N	ROW	CONTACT CODE MOD. 1					MOD. 2				
		1	2	3	4	5	6	7	8	9	10
88922-X09 AND 88922-X09LF	D	1	3	1	1	1	1	1	1	1	1
	C	1	3	1	1	1	1	1	1	1	1
	B	1	3	1	1	1	1	1	1	1	1
	A	1	3	1	1	1	1	1	1	1	1

METRAL P/N	ROW	CONTACT CODE MOD. 1					MOD. 2				
		1	2	3	4	5	6	7	8	9	10
88922-X10 AND 88922-X10LF	D	-	-	6	6	-	-	6	6	6	6
	C	6	6	6	6	6	6	6	6	6	6
	B	6	6	6	6	6	6	6	6	6	6
	A	-	-	-	-	-	-	8	8	8	20

METRAL P/N	ROW	CONTACT CODE MOD. 1					MOD. 2				
		1	2	3	4	5	6	7	8	9	10
88922-X11 AND 88922-X11LF	D	19	1	1	1	1	19	1	19	1	19
	C	3	1	1	1	1	19	1	19	1	19
	B	3	1	1	1	1	19	1	19	1	19
	A	3	1	1	1	1	19	1	19	1	19

METRAL P/N	ROW	CONTACT CODE MOD. 1					MOD. 2				
		1	2	3	4	5	6	7	8	9	10
88922-X12 AND 88922-X12LF	D	1	1	1	1	1	1	1	1	1	3
	C	1	1	1	1	1	1	1	1	1	3
	B	1	1	1	1	1	1	1	1	1	3
	A	1	1	1	1	1	1	1	1	1	3

mat'l code				tolerances unless otherwise specified				CUSTOMER		FCI www.fciconnect.com	
lfr	ecn no.	dr	date	linear	0.X ±0.3			COPY		title	
AV					0.XX ±0.13			projection		METRAL SIGNAL HEADER	
					.XXX ±.051					2 MOD, 4 ROW PRESS-FIT	
				angles	0° ±2°					product family	
				dr	T.BRUNGARD 11/19/99			MM		METRAL	
				engr	M.STRAWSER 11/19/99			scale		code	
				chr	M.STRAWSER 11/19/99			1:1		213	
				appd	M.STRAWSER 02/29/00			A		sheet	
sheet index		revision sheet								4	

[illegible]

METRAL P/N	ROW	CONTACT CODE MOD. 1						MOD. 2					
		1	2	3	4	5	6	7	8	9	10	11	12
88922-X17 AND 88922-X17LF	D	-	6	-	6	-	6	-	6	-	6	-	6
	C	-	-	-	-	-	-	-	-	-	-	-	-
	B	-	-	-	-	-	-	-	-	-	-	-	-
	A	-	6	-	6	-	6	-	6	-	6	-	6

METRAL P/N	ROW	CONTACT CODE MOD. 1					MOD. 2						
		1	2	3	4	5	6	7	8	9	10	11	12
88922-X21 AND 88922-X21LF	D	20	-	7	-	7	-	7	-	7	-	20	
	C	20	-	-	7	-	7	-	7	-	20		
	B	20	-	7	-	7	-	7	-	7	-	20	
	A	20	-	-	7	-	7	-	7	-	20		

[illegible]

METRAL P/N	ROW	CONTACT CODE MOD. 1					MOD. 2						
		1	2	3	4	5	6	7	8	9	10	11	12
88922-X18 AND 88922-X18LF	D	1	1	1	4	1	1	3	3	4	-	-	-
	C	1	1	1	4	1	1	3	3	4	4	-	-
	B	1	1	1	4	1	1	3	3	4	4	-	-
	A	1	1	1	4	1	1	3	3	4	4	-	-

METRAL P/N	ROW	CONTACT CODE MOD. 1						MOD. 2					
		1	2	3	4	5	6	7	8	9	10	11	12
88922-X22 AND 88922-X22LF	C	2	2	2	6	6	6	6	6	6	2	2	2
	D	2	2	2	6	6	6	6	6	6	2	2	2
	B	2	2	2	6	6	6	6	6	6	2	2	2
	A	2	2	2	6	6	6	6	6	6	2	2	2

[illegible]

METRAL P/N	ROW	CONTACT CODE MOD. 1						MOD. 2					
		1	2	3	4	5	6	7	8	9	10	11	12
88922-X19 AND 88922-X19LF	D	1	2	2	2	2	2	2	2	2	2	4	4
	C	1	2	2	2	2	2	2	2	2	2	4	4
	B	1	2	2	2	2	2	2	2	2	2	4	4
	A	1	2	2	2	2	2	2	2	2	2	4	4

METRAL P/N	ROW	CONTACT CODE MOD. 1						MOD. 2					
		1	2	3	4	5	6	7	8	9	10	11	12
88922-X23 AND 88922-X23LF	D	19	3	3	3	3	3	19	3	3	3	3	3
	C	19	3	3	3	3	3	19	3	3	3	3	3
	B	19	3	3	3	3	3	19	3	3	3	3	3
	A	19	3	3	3	3	3	19	3	3	3	3	3

METRAL P/N	ROW	CONTACT CODE MOD. 1						MOD. 2					
		1	2	3	4	5	6	7	8	9	10	11	12
88922-X16 AND 88922-X16LF	D	-	2	-	2	-	2	-	2	-	2	-	2
	C	-	-	-	-	-	-	-	-	-	-	-	-
	B	-	-	-	-	-	-	-	-	-	-	-	-
	A	-	2	-	2	-	2	-	2	-	2	-	2

METRAL P/N	ROW	CONTACT CODE MOD. 1						MOD. 2					
		1	2	3	4	5	6	7	8	9	10	11	12
88922-X20 AND 88922-X20LF	D	21	-	11	-	11	-	11	-	11	-	-	21
	C	21	-	-	11	-	11	-	11	-	11	-	21
	B	21	-	11	-	11	-	11	-	11	-	-	21
	A	21	-	-	11	-	11	-	11	-	11	-	21

METRAL P/N	ROW	CONTACT CODE MOD. 1						MOD. 2					
		1	2	3	4	5	6	7	8	9	10	11	12
88922-X24 AND 88922-X24LF	D	-	7	-	7	-	7	-	7	-	7	-	7
	C	-	7	-	7	-	7	-	7	-	7	-	7
	B	7	-	7	-	7	-	7	-	7	-	7	-
	A	-	7	-	7	-	7	-	7	-	7	-	7



This document is the property of and embodies
CONFIDENTIAL and PROPRIETARY information of FCI.
No part of the information shown on this
document may be used in any way or disclosed
to others without the written consent of FCI.
Copyright FCI.

[illegible]



METRAL P/N	ROW	CONTACT CODE MOD. 1					MOD. 2				
		1	2	3	4	5	6	7	8	9	10
88922-X25 AND 88922-X25LF	D	3	3	3	3	3	3	-	3	3	3
	C	3	3	3	3	3	3	-	3	3	3
	B	3	3	3	3	3	3	-	3	3	3
	A	3	3	3	3	3	3	-	3	3	3

METRAL P/N	ROW	CONTACT CODE MOD. 1					MOD. 2				
		1	2	3	4	5	6	7	8	9	10
88922-X26 AND 88922-X26LF	D	19	3	3	3	3	3	19	3	3	3
	C	19	3	3	3	3	3	19	3	3	3
	B	19	3	3	3	3	3	19	3	3	3
	A	19	3	3	3	3	3	19	3	3	3

METRAL P/N	ROW	CONTACT CODE MOD. 1					MOD. 2				
		1	2	3	4	5	6	7	8	9	10
88922-X27 AND 88922-X27LF	D	3	-	3	-	3	-	3	-	3	-
	C	-	3	-	3	-	3	-	3	-	3
	B	3	-	3	-	3	-	3	-	3	-
	A	-	3	-	3	-	3	-	3	-	3

METRAL P/N	ROW	CONTACT CODE MOD. 1					MOD. 2				
		1	2	3	4	5	6	7	8	9	10
88922-X28 AND 88922-X28LF	D	19	-	3	-	3	-	3	-	3	-
	C	19	-	3	-	3	-	3	-	3	-
	B	19	-	3	-	3	-	3	-	3	-
	A	19	-	3	-	3	-	3	-	3	-

METRAL P/N	ROW	CONTACT CODE MOD. 1					MOD. 2				
		1	2	3	4	5	6	7	8	9	10
88922-X29 AND 88922-X29LF	D	-	7	-	7	-	7	-	7	-	7
	C	7	-	7	-	7	-	7	-	7	-
	B	-	7	-	7	-	7	-	7	-	7
	A	7	-	7	-	7	-	7	-	7	-

METRAL P/N	ROW	CONTACT CODE MOD. 1					MOD. 2				
		1	2	3	4	5	6	7	8	9	10
88922-X30 AND 88922-X30LF	D	-	17	-	17	-	17	-	17	-	17
	C	17	-	17	-	17	-	17	-	17	-
	B	-	17	-	17	-	17	-	17	-	17
	A	17	-	17	-	17	-	17	-	17	-

METRAL P/N	ROW	CONTACT CODE MOD. 1					MOD. 2				
		1	2	3	4	5	6	7	8	9	10
88922-X31 AND 88922-X31LF	D	3	3	2	3	3	2	4	4	2	2
	C	3	3	2	3	3	2	4	4	2	2
	B	3	3	2	3	3	2	4	4	2	2
	A	3	3	2	3	3	2	4	4	2	2

METRAL P/N	ROW	CONTACT CODE MOD. 1					MOD. 2				
		1	2	3	4	5	6	7	8	9	10
88922-X32 AND 88922-X32LF	D	-	-	6	6	-	20	6	6	6	6
	C	6	6	6	6	6	6	6	6	6	6
	B	6	6	6	6	6	6	6	6	6	6
	A	-	-	-	-	-	8	8	8	8	20

METRAL P/N	ROW	CONTACT CODE MOD. 1					MOD. 2				
		1	2	3	4	5	6	7	8	9	10
88922-X33 AND 88922-X33LF	D	-	-	64	64	-	52	64	64	64	64
	C	64	64	64	64	64	64	64	64	64	64
	B	64	64	64	64	64	64	64	64	64	64
	A	-	-	-	-	-	69	69	69	69	52

METRAL P/N	ROW	CONTACT CODE MOD. 1					MOD. 2				
		1	2	3	4	5	6	7	8	9	10
88922-X34 AND 88922-X34LF	D	7	6	6	6	6	6	6	6	6	5
	C	7	6	6	6	6	6	6	6	6	5
	B	7	6	6	6	6	6	6	6	6	5
	A	7	6	6	6	6	6	6	6	6	5

METRAL P/N	ROW	CONTACT CODE MOD. 1					MOD. 2				
		1	2	3	4	5	6	7	8	9	10
88922-X35 AND 88922-X35LF	D	2	2	2	2	2	2	2	2	2	2
	C	2	2	2	2	2	2	2	2	2	2
	B	2	2	2	2	2	2	2	2	2	2
	A	4	4	4	4	19	19	4	4	4	19

METRAL P/N	ROW	CONTACT CODE MOD. 1					MOD. 2				
		1	2	3	4	5	6	7	8	9	10
88922-X36 AND 88922-X36LF	D	7	7	7	7	6	7	6	7	6	7
	C	7	7	7	7	7	7	7	7	7	7
	B	7	7	7	7	7	7	7	7	7	7
	A	7	7	7	7	7	7	7	7	7	7


mat'l code				tolerances unless otherwise specified				CUSTOMER		FCJ www.fcjconnect.com		
lfr	ecn no.	dr	date	linear	0.X ±0.3			projection	COPY			
AV					0.XX ±0.13							
					.XXX ±.051							
				angles	0° ±2°			 MM 1:1	title		METRAL SIGNAL HEADER 2 MOD, 4 ROW PRESS-FIT	
				dr	T.BRUNGARD	11/19/99	product family		METRAL		code	
				engr	M.STRAWSE	11/19/99	size		dwg no		213	
				chr	M.STRAWSE	11/19/99	A		88922		sheet	
				appd	M.STRAWSE	02/29/00					6	
sheet index		revision sheet										

This document is the property of and embodies
CONFIDENTIAL and PROPRIETARY information of FCI.
No part of the information shown on this
document may be used in any way or disclosed
to others without the written consent of FCI.
Copyright FCI.



METRAL P/N	ROW	CONTACT CODE MOD. 1						MOD. 2					
		1	2	3	4	5	6	7	8	9	10	11	12
88922-X37 AND 88922-X37LF	D	3	3	3	3	3	3	3	3	3	3	3	3
	C	3	3	3	3	3	3	3	3	3	3	3	3
	B	3	3	3	3	3	3	3	1	3	3	3	3
	A	3	3	3	3	3	3	3	3	3	3	3	3

METRAL P/N	ROW	CONTACT CODE MOD. 1						MOD. 2					
		1	2	3	4	5	6	7	8	9	10	11	12
88922-X38 AND 88922-X38LF	D	3	3	1	9	3	3	3	3	3	3	3	3
	C	3	3	1	9	3	3	3	3	3	3	3	3
	B	3	3	3	3	3	3	3	1	3	3	3	3
	A	3	3	3	3	3	3	3	3	3	3	3	3

mat'l code				--		tolerances unless otherwise specified		CUSTOMER		 www.fciconnect.com				
lfr	ecn no.	dr	date	linear	0.X ±0.3		COPY							
AV					0.XX ±0.13		projection							
					.XXX ±.051									
				angles	0° ±2°				title METRAL SIGNAL HEADER 2 MOD, 4 ROW PRESS-FIT					
				dr	T.BRUNGARD	11/19/99	scale					product family		code
				enrg	M.STRAWSER	11/19/99	1:1					METRAL		213
				chr	M.STRAWSER	11/19/99			size		sheet			
				appd	M.STRAWSER	02/29/00			A		7			
sheet index		revision sheet												



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.