

FUJITSU Component Wireless Modules

Bluetooth® Ver. 4.1 Module (Blank Version)

MBH7BLZ07-109033

Overview

Ultra small, low power consumption Bluetooth low energy peripheral "blank" module.



RoHS compliant

Feature

- "Blank" module: user can develop own unique application codes
- Based on Nordic Semiconductor nRF51822 SoC Rev. 3
- All 22 GPIO pins are allocated to the module
- Separation of protocol stack and application code
- Assurance that the protocol stack is fully tested and can't be corrupted by application software development
- Implement your unique profiles and application code
- Custom software development service available
- Antenna pattern design and simulation available



MBH7BLZ07-109033

Item		Specifications
Part number		MBH7BLZ07-109033
Antenna		Pattern antenna
Bluetooth technology		Conforms to Bluetooth Core Specification Version 4.1 (single mode low energy radio)
RAM		16KB
Transmit power		+4 dBm max. (switchable by API)
Receiver sensitivity		-88 dBm typical
Interface		UART, SPI, I2C, GPIO
Crystal oscillator		Embedded
Operating temperature & power supply	LDO mode	-40°C to +85°C, 1.9 VDC to 3.6 VDC -25°C to +75°C, 1.8 VDC to 3.6 VDC
	Low voltage mode	-25°C to +75°C, 1.75 VDC to 1.95 VDC
Power consumption	Tx mode	10.5mA typical (at 0dBm)
	Rx mode	13mA typical
Number of GPIO		22
Dimensions		11.5 x 7.9 x 1.7 mm
Mounting method		Surface mount (SMD)
Certifications		Bluetooth qualification (QDID) / Radio Act (Japan) / FCC / IC / CE



Note: Bluetooth SIG registration is required to use this module's QDID.

Evaluation kit

Part number	Details
MBH7BLZ07-EB1-KIT-2	Evaluation kit
Contains:	
- MBH-FUJ12-E1	Evaluation board
- MBH7BLZ07-DAU-EB1	Module mounted on daughter board
- USB cable	

- Dimensions

MBH7BLZ07-109033

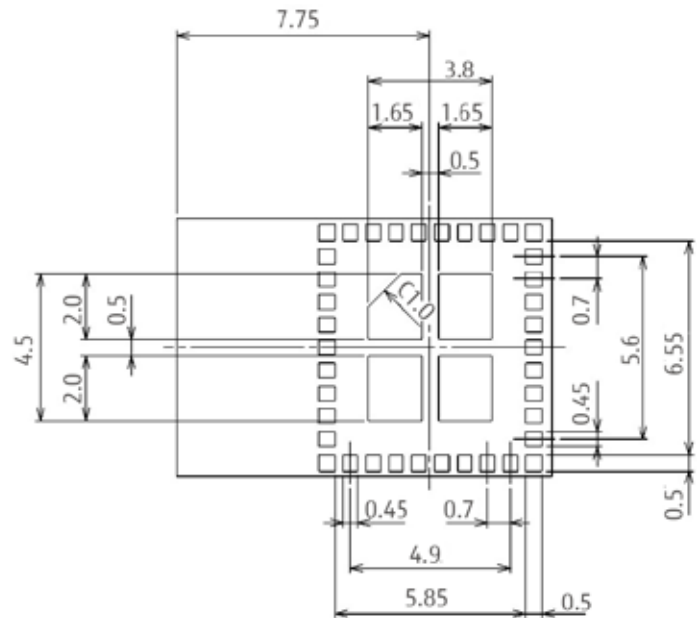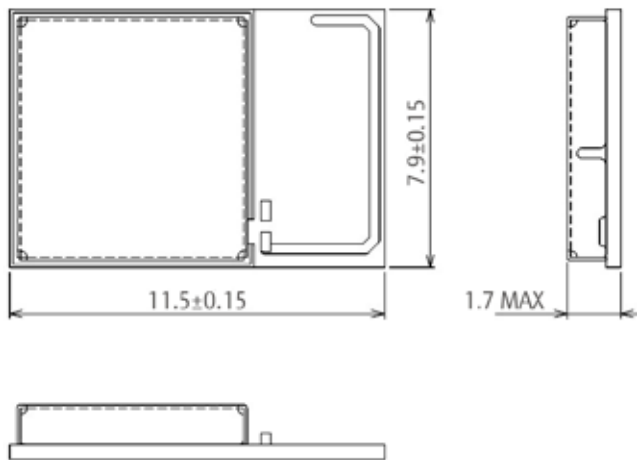

Unit: mm

Note: The Bluetooth® word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. and any use of such marks by Fujitsu Component is under license. Other trademarks and trade names are those of their respective owners.

Contact

Japan

FUJITSU COMPONENT LIMITED
Shinagawa Seaside Park Tower
12-4, Higashi-shinagawa 4-chome,
Tokyo 140 0002, Japan
Tel: (81-3) 3450-1682
Fax: (81-3) 3474-2385
Email: fcl-contact@cs.jp.fujitsu.com
Web: www.fujitsu.com/jp/group/fcl/en/

North and South America

FUJITSU COMPONENTS AMERICA, INC.
2290 North First Street, Suite 212
San Jose, CA 95131 U.S.A.
Tel: (1-408) 745-4900
Fax: (1-408) 745-4970
Email: components@us.fujitsu.com
Web: <http://us.fujitsu.com/components/>

Europe

FUJITSU COMPONENTS EUROPE B.V.
Diamantlaan 25
2132 WV Hoofddorp
Netherlands
Tel: (31-23) 5560910
Fax: (31-23) 5560950
Email: info@fceu.fujitsu.com
Web: emea.fujitsu.com/components/

Asia Pacific

FUJITSU COMPONENTS ASIA, Ltd.
102E Pasir Panjang Road
#01-01 Citilink Warehouse Complex,
Singapore 118529
Tel: (65) 6375-8560 / Fax: (65) 6273-3021
Email: fcal@sg.fujitsu.com
[www.fujitsu.com/sg/products/devices/
components/](http://www.fujitsu.com/sg/products/devices/components/)

China

FUJITSU ELECTRONIC COMPONENTS
(SHANGHAI) CO., LTD.
Unit 4306, InterContinental Center
100 Yu Tong Road, Shanghai 200070, China
Tel: (86 21) 3253 0998 /Fax: (86 21) 3253 0997
Email: fcal@sg.fujitsu.com
[www.fujitsu.com/sg/products/devices/
components/](http://www.fujitsu.com/sg/products/devices/components/)

Hong Kong

FUJITSU COMPONENTS HONG KONG Co., Ltd.
Room 06, 28/F, Greenfield Tower, Concordia
Plaza, No.1 Science Museum Road,
Tsim Sha Tsui East, Kowloon, Hong Kong
Tel: (852) 2881 8495 Fax: (852) 2894 9512
Email: fcal@sg.fujitsu.com
[www.fujitsu.com/sg/products/devices/
components/](http://www.fujitsu.com/sg/products/devices/components/)

Korea

FUJITSU COMPONENTS KOREA, LTD.
Alpha Tower #403,
645 Sampyeong-dong,
Bundang-gu, Seongnam-si,
Gyeonggi-do, 13524 Korea
Tel: (82 31) 708-7108
Fax: (82 31) 709-7108
Email: fcal@sg.fujitsu.com
www.fujitsu.com/sg/products/
devices/components/

Copyright

All trademarks or registered trademarks are the property of their respective owners. Fujitsu Components America or its affiliates do not warrant that the content of datasheet is error free. In a continuing effort to improve our products Fujitsu Components America, Inc. or its affiliates reserve the right to change specifications/datasheets without prior notice. Copyright ©2017 Fujitsu Components America, Inc. All rights reserved. Revised September 8, 2017



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.