

# FNA 13/32" x 1-1/2" 250Vac pin indicating time-delay supplemental fuses



250Vac  
1/10  
to  
6A

125Vac  
6-1/4  
to  
10A



125Vac  
12 to 15A



32Vac  
20 to 30A

### Catalog symbol / color code:

- FNA
  - Green (250Vac max, 1/10 to 6A)
  - Blue (125Vac max, 6-1/4 to 15A)
  - Grey (32Vac max, 20 to 30A)

### Description:

Pin indicating, time-delay supplemental fuse.

### Specifications:

#### Ratings

Fuse amp range	Interrupting rating at system voltage			Agency information	
	250 Vac	125 Vac	32 Vac	UL®	CSA®
1/10 to 8/10	35A	10kA	-	X	X
1 to 6	200A	10kA	-	X	X
6-1/4 to 15	-	10kA	-	X	X
20 to 30	-	-	1kA	-	-

#### Agency information

- CE
- UL Listed 1/10 to 8/10A @ 125/250Vac, 1-15A @ 125Vac, Guide JDYX, File E19180
- CSA Certified 1/10 to 10A @ 125Vac, Class 1422-01, File 53787

#### Catalog numbers (amps)

FNA-1/10	FNA-1	FNA-3	FNA-9
FNA-1/8	FNA-1-1/8	FNA-3-2/10	FNA-10
FNA-15/100	FNA-1-1/4	FNA-3-1/2	FNA-12
FNA-2/10	FNA-1-4/10	FNA-4	FNA-15
FNA-1/4	FNA-1-1/2	FNA-4-1/2	FNA-20
FNA-3/10	FNA-1-6/10	FNA-5	FNA-25
FNA-4/10	FNA-1-8/10	FNA-5-6/10	FNA-30
FNA-1/2	FNA-2	FNA-6	
FNA-6/10	FNA-2-1/4	FNA-6-1/4	
FNA-3/4	FNA-2-1/2	FNA-7	
FNA-8/10	FNA-2-8/10	FNA-8	

#### Carton quantity

Amps	Qty.
1/10 to 30	10

### Features:

- Color coded by maximum voltage rating
- Pin indication for visual indication of open fuse condition
- Dual-element, time-delay performance permits close sizing on control transformers and relays
- Silver-plated pin for positive, electrical signal activation
- 12 amp and more versions are dual-tube construction

### Typical applications

- Power electronic circuits with high inrush currents and fuse openings must be quickly apparent
- Inductive load circuits where pin indication of open fuse condition is desired

### Recommended fuse blocks/fuse holders

Catalog symbol	Description	Data sheet No.
BMM	1-, 2- and 3-pole modular blocks with optional covers	10235
3839	4-pole signaling block	*
<b>Panel mount holders</b>		
HPF-C	1-pole holder**	2114
<b>Fuseclips</b>		
1A3400, 5956 and 5960	PCB fuseclips	2132


\* Call toll-free 855-287-7626 (855-BUSSMANN) Eaton's Bussmann Division application engineering for details.

\*\* 1/10 to 10A single tube fuses only.

### Dimensions - in:



**Time-current characteristic curves – average melt:**

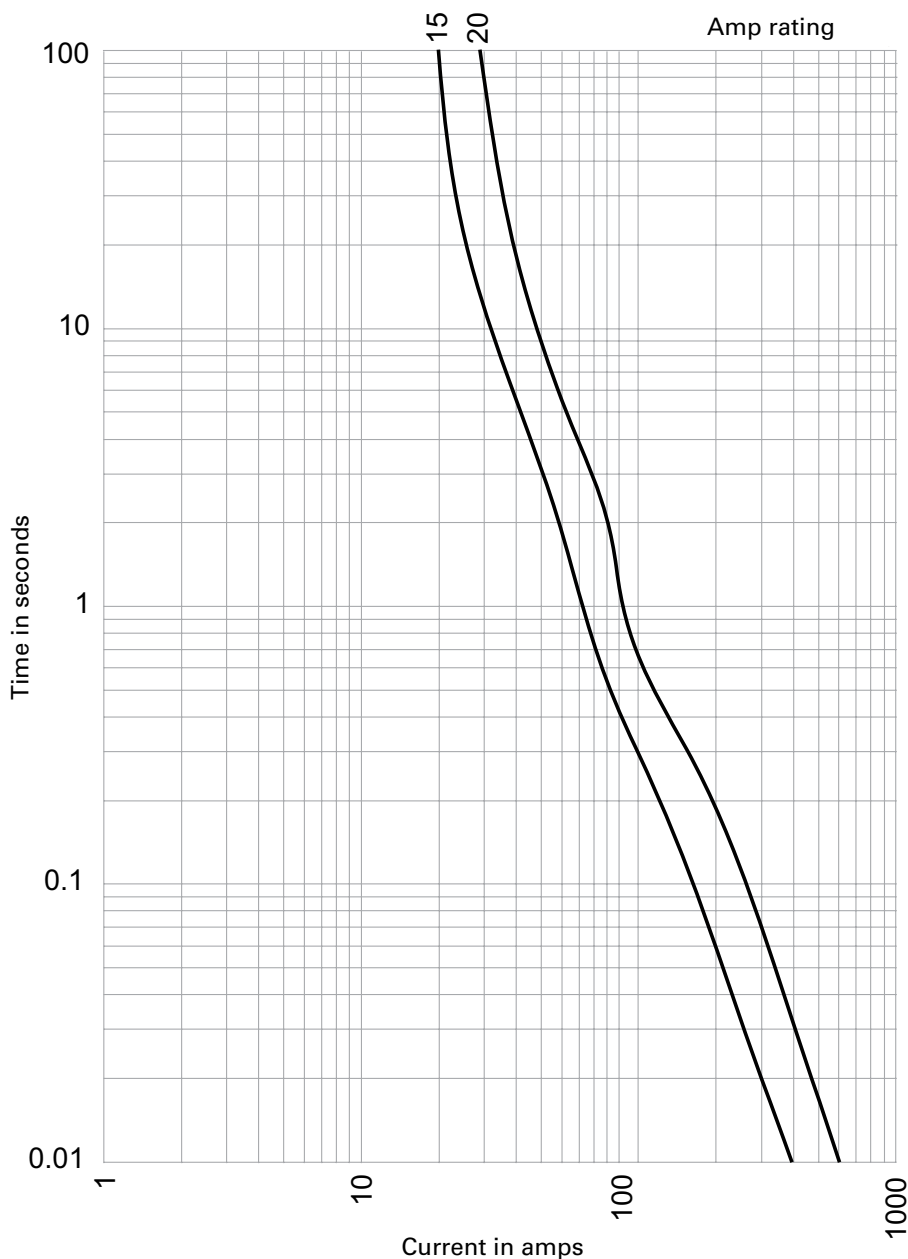

The only controlled copy of this data sheet is the electronic read-only version located on the Eaton network drive. All other copies of this document are by definition uncontrolled. This bulletin is intended to clearly present comprehensive product data and provide technical information that will help the end user with design applications. Eaton reserves the right, without notice, to change design or construction of any products and to discontinue or limit distribution of any products. Eaton also reserves the right to change or update, without notice, any technical information contained in this bulletin. Once a product has been selected, it should be tested by the user in all possible applications.

**Eaton**  
1000 Eaton Boulevard  
Cleveland, OH 44122  
United States  
Eaton.com

Bussmann Division  
114 Old State Road  
Ellisville, MO 63021  
United States  
Eaton.com/bussmannseries

© 2015 Eaton  
All Rights Reserved  
Printed in USA  
Publication No. 2029 – BU-SB14292  
December 2015

Eaton and Bussmann are valuable trademarks of Eaton in the US and other countries. You are not permitted to use the Eaton trademarks without prior written consent of Eaton.

CSA is a registered trademark of the Canadian Standards Group.  
UL is a registered trademark of the Underwriters Laboratories, Inc.

For Eaton's Bussmann series product information, call **1-855-287-7626** or visit: **Eaton.com/bussmannseries**



Follow us on social media to get the latest product and support information.





Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



#### Как с нами связаться

**Телефон:** 8 (812) 309 58 32 (многоканальный)

**Факс:** 8 (812) 320-02-42

**Электронная почта:** [org@eplast1.ru](mailto:org@eplast1.ru)

**Адрес:** 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.