



**CRYSTEK**  
**MICROWAVE**  
 A DIVISION OF CRYSTEK CORPORATION

**FLEXIBLE .086 PRECISION  
 12.6 GHZ RIGHT ANGLE  
 RF COAX CABLE ASSEMBLIES**

**086 Flexible 50 Ohm 12.6 GHz Right Angle Coaxial Cables**



**Features:**

- Strain Relief:** Heavy duty adhesive strain relief
- Center Conductor:** SCCS (Silver-Plated Copper Clad Steel)
- Inner Braid:** Flat silver-plated copper strip
- Outer Braid:** PC (Round Silver-Plated Copper Braid)
- Dielectric:** PTFE (Polytetrafluoroethylene)
- Jacket:** FEP (Fluorinated Ethylene Propylene)
- Cable Outer Diameter:** 0.100" (2.54mm)
- Connectors:** Gold-plated brass
- Center Pin:** Gold-plated brass
- Jacket Color:** Blue
- Operating Temperature:** -45°C to +85°C

**Static Bend Radius:** 0.3" Min.

**Electrical Specifications:**

- Impedance:** 50 Ohms
- Frequency:** Up to 12.6 GHz
- Insertion Loss:** 0.83 dB/ft Typ at 12 GHz
- VSWR: SMA Male/RA** <1.35 to 12.6 GHz
- RA/RA** <1.35 to 6.4 GHz
- Nominal Capacitance:** 31 pF/ft
- Velocity of Propagation:** 70%
- Shield Effectiveness:** Greater than 100 dB
- Attenuation (dB/ft):** 0.15 Typical at 500 MHz
- \*connector loss not included** 0.21 Typical at 1 GHz
- 0.38 Typical at 3 GHz
- 0.56 Typical at 6 GHz
- 0.83 Typical at 12 GHz

- Max Power in (Kwatts):** 0.18 @ 500 MHz
- \*as specified at 25°C/sea level** 0.13 @ 1 GHz
- 0.08 @ 3 GHz
- 0.05 @ 6 GHz
- 0.04 @ 12 GHz



**Available Connector Terminations:**

- SMA Male / SMA Male Right Angle (DC to 12.6 GHz)
- SMA Male Right Angle / SMA Male Right Angle (DC to 6.4 GHz)

*Custom Lengths Available*



12730 COMMONWEALTH DRIVE • FORT MYERS, FL 33913  
 PHONE: 239-561-3311 • 800-237-3061 Rev.: D  
 FAX: 239-561-1025 • WWW.CRYSTEK.COM Date: 12-09-14



**CRYSTEK**  
**MICROWAVE**  
 A DIVISION OF CRYSTEK CORPORATION

**FLEXIBLE .086 PRECISION  
 12.6 GHZ RIGHT ANGLE  
 RF COAX CABLE ASSEMBLIES**



**SMA Male [Right Ange] / SMA Male [Straight]**

12.6 GHz Part Number	Description	Length
CCSMA121-MM-086F-12	.086 Flexible RF Coax Cable, SMA Male/Male, RA/Straight	12"
CCSMA121-MM-086F-24	.086 Flexible RF Coax Cable, SMA Male/Male, RA/Straight	24"
CCSMA121-MM-086F-36	.086 Flexible RF Coax Cable, SMA Male/Male, RA/Straight	36"
CCSMA121-MM-086F-48	.086 Flexible RF Coax Cable, SMA Male/Male, RA/Straight	48"
CCSMA121-MM-086F-60	.086 Flexible RF Coax Cable, SMA Male/Male, RA/Straight	60"
CCSMA121-MM-086F-72	.086 Flexible RF Coax Cable, SMA Male/Male, RA/Straight	72"
CCSMA121-MM-086F-120	.086 Flexible RF Coax Cable, SMA Male/Male, RA/Straight	120"

**SMA Male [Right Angle] / SMA Male [Right Angle]**

6.4 GHz Part Number	Description	Length
CCSMA642-MM-086F-12	.086 Flexible RF Coax Cable, SMA Male/Male, RA/RA	12"
CCSMA642-MM-086F-24	.086 Flexible RF Coax Cable, SMA Male/Male, RA/RA	24"
CCSMA642-MM-086F-36	.086 Flexible RF Coax Cable, SMA Male/Male, RA/RA	36"
CCSMA642-MM-086F-48	.086 Flexible RF Coax Cable, SMA Male/Male, RA/RA	48"
CCSMA642-MM-086F-60	.086 Flexible RF Coax Cable, SMA Male/Male, RA/RA	60"
CCSMA642-MM-086F-72	.086 Flexible RF Coax Cable, SMA Male/Male, RA/RA	72"
CCSMA642-MM-086F-120	.086 Flexible RF Coax Cable, SMA Male/Male, RA/RA	120"



**CRYSTEK**  
 CORPORATION

12730 COMMONWEALTH DRIVE • FORT MYERS, FL 33913  
 PHONE: 239-561-3311 • 800-237-3061 Rev.: D  
 FAX: 239-561-1025 • WWW.CRYSTEK.COM Date: 12-09-14




**CRYSTEK**  
**MICROWAVE**  
A DIVISION OF CRYSTEK CORPORATION


**FLEXIBLE .086 PRECISION  
12.6 GHZ RIGHT ANGLE  
RF COAX CABLE ASSEMBLIES**



**S11 Actual Data Plot PN: CCSMA121-MM-086F-24**

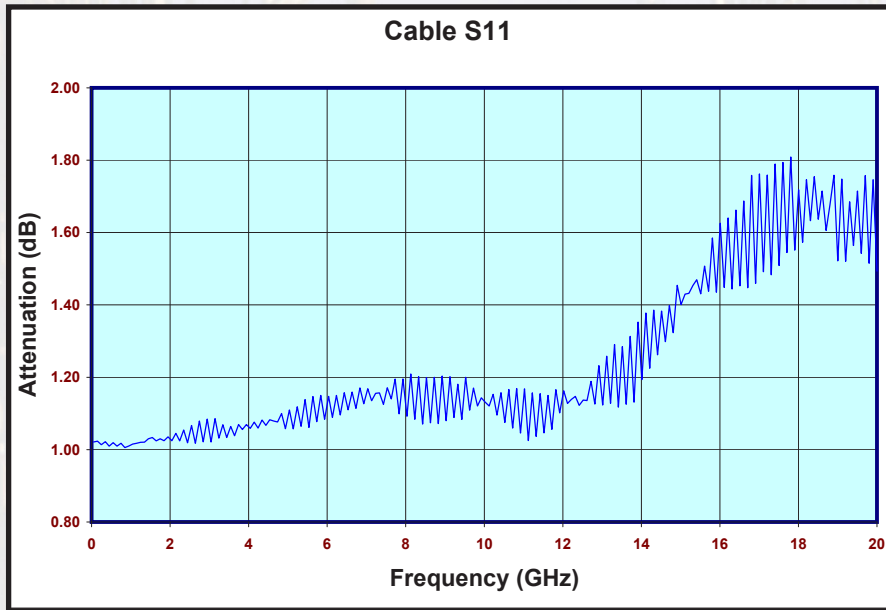

**S12 Actual Data Plot PN: CCSMA121-MM-086F-24**

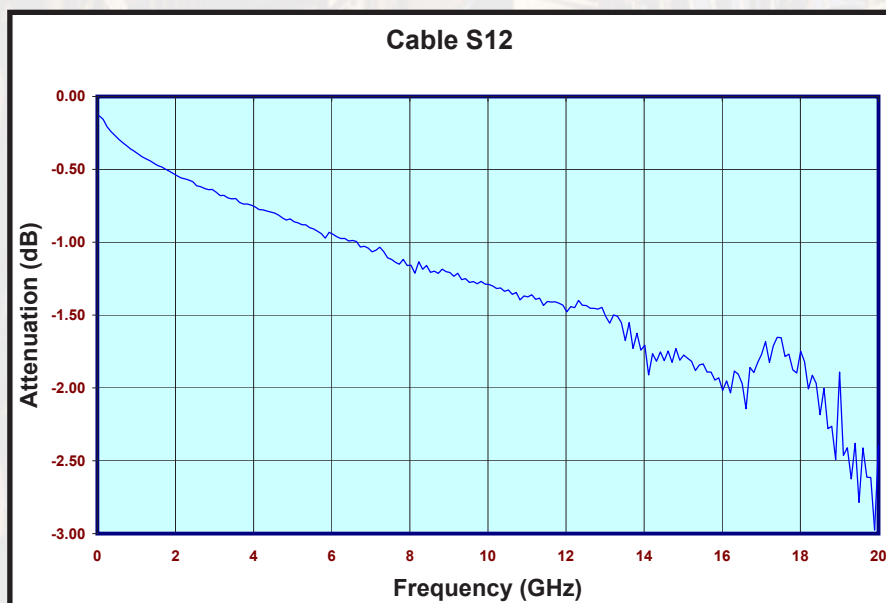

**CRYSTEK**  
CORPORATION

12730 COMMONWEALTH DRIVE • FORT MYERS, FL 33913  
PHONE: 239-561-3311 • 800-237-3061 Rev.: D  
FAX: 239-561-1025 • WWW.CRYSTEK.COM Date: 12-09-14




**CRYSTEK**  
**MICROWAVE**  
A DIVISION OF CRYSTEK CORPORATION


**FLEXIBLE .086 PRECISION  
12.6 GHZ RIGHT ANGLE  
RF COAX CABLE ASSEMBLIES**



**S21 Actual Data Plot PN: CCSMA121-MM-086F-24**

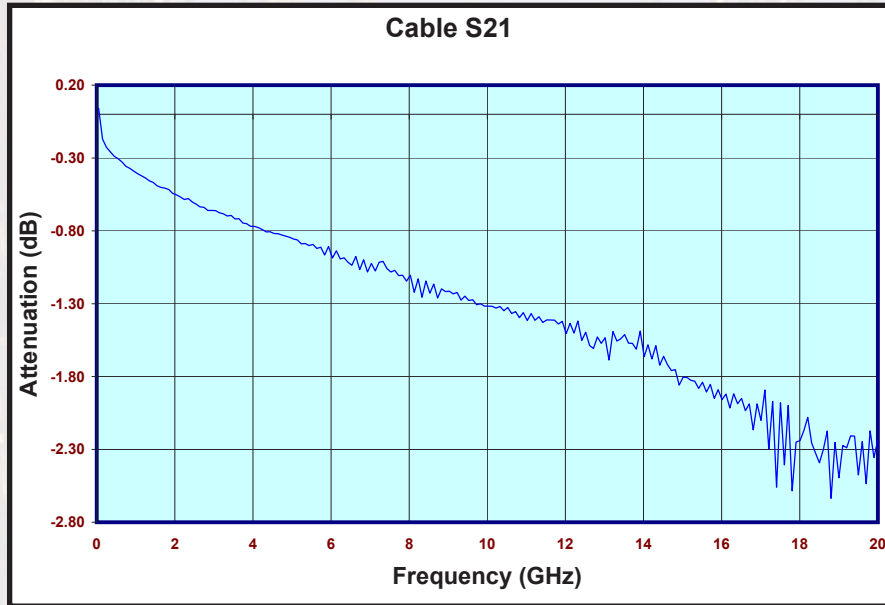

**S22 Actual Data Plot PN: CCSMA121-MM-086F-24**

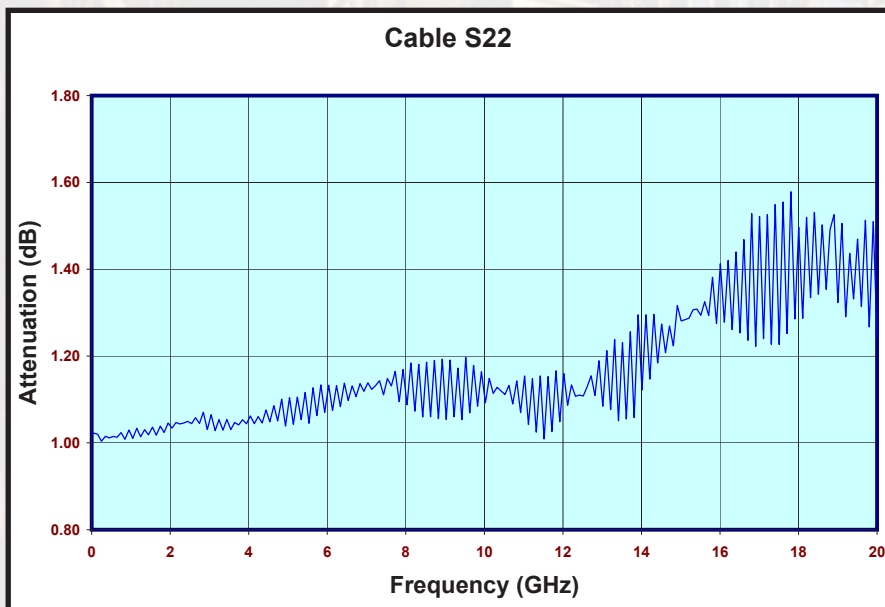

**CRYSTEK**  
CORPORATION

12730 COMMONWEALTH DRIVE • FORT MYERS, FL 33913  
PHONE: 239-561-3311 • 800-237-3061 Rev.: D  
FAX: 239-561-1025 • WWW.CRYSTEK.COM Date: 12-09-14



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



#### Как с нами связаться

**Телефон:** 8 (812) 309 58 32 (многоканальный)

**Факс:** 8 (812) 320-02-42

**Электронная почта:** [org@eplast1.ru](mailto:org@eplast1.ru)

**Адрес:** 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.