REDUCED FOR PACKAGING

AMP INCORPORATED
HARRISBURG, PA. U.S.A.

AMP★ EXTRACTION TOOL 91093-1 FOR AMP FLEXIBLE FLAT CABLE (FFC) ROUND WIRE RECEPTACLE CONTACTS

IS 7646	
RELEASED	12-7-73
REVISED	

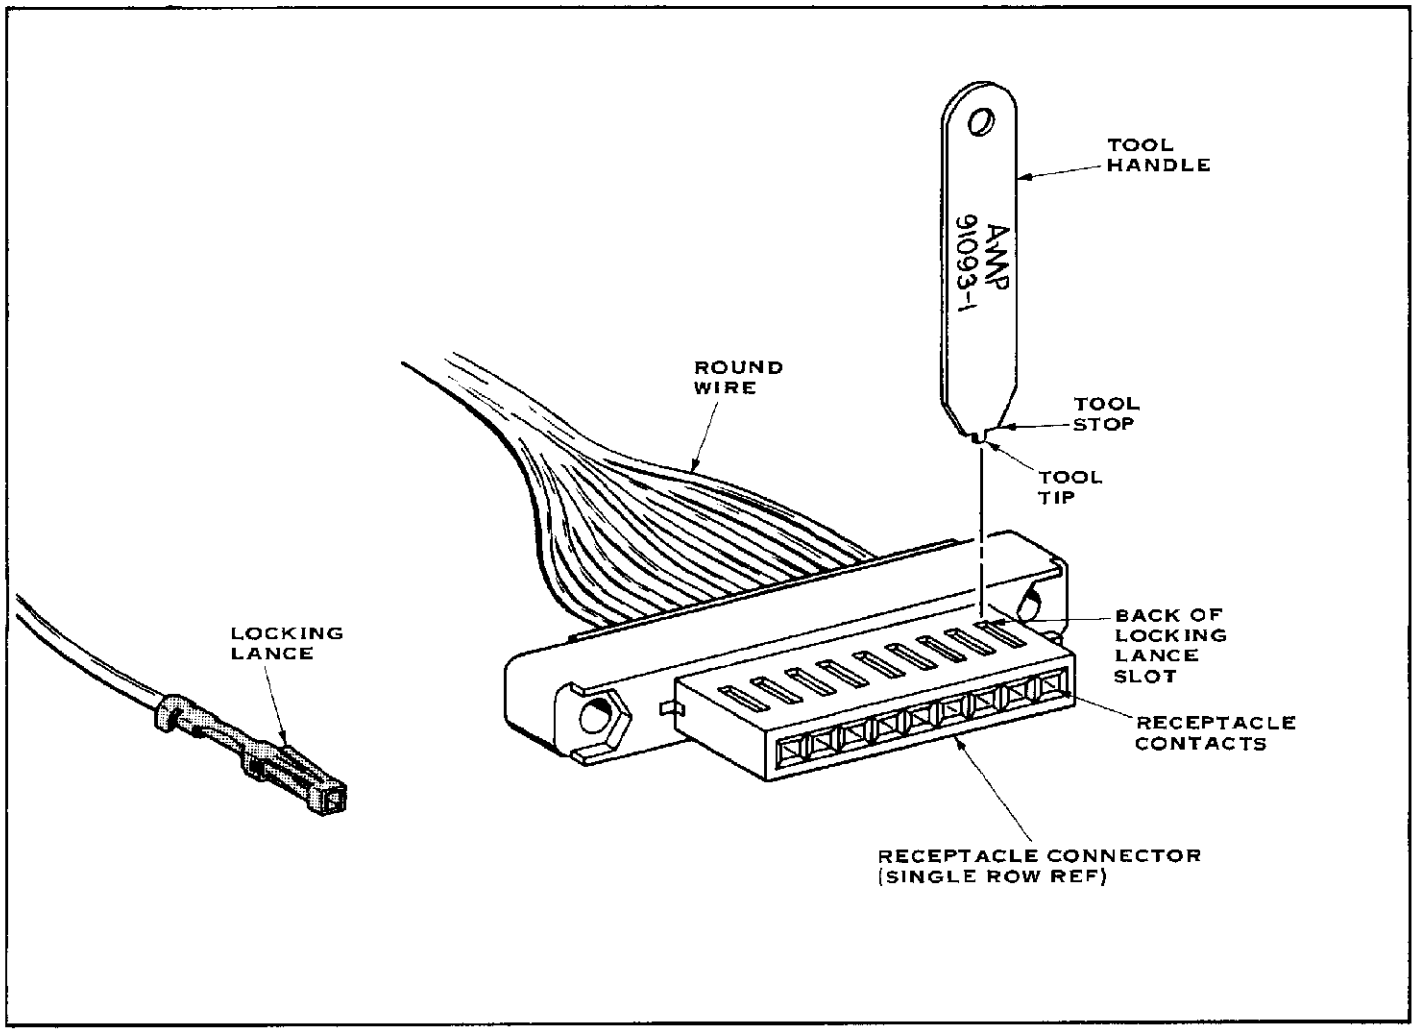

FIGURE 1

© Copyright 1973 by AMP Incorporated, Harrisburg, Pa. All International Rights Reserved. AMP Incorporated products covered by U.S. and Foreign patents and/or patents pending.

1. INTRODUCTION

The AMP Extraction Tool 91093-1 is designed to remove individual AMP FFC receptacle contacts — crimped to round wire — from AMP FFC connectors. Read these instructions thoroughly before starting.

NOTE

All dimensions presented on this instruction sheet are in inches, unless otherwise stated.

2. DESCRIPTION

The tool tip is designed to enter the locking lance slot and depress the contact locking lance. The tool stop is designed to prevent contact damage from over-insertion of the tool. The tool handle has the tool number marked on it. See Figure 1.

3. EXTRACTION PROCEDURE

Remove the contact as follows:

1. Align the tool tip with the BACK of the applicable locking lance slot, as shown in Figure 1.

2. Insert the tool tip straight into the slot until the tool stop bottoms on the connector.

3. Grip the wire of the contact to be removed, and pull the contact part way out of the connector.

4. Remove the tool, and pull the contact out of the connector.

★TRADEMARK OF AMP INCORPORATED

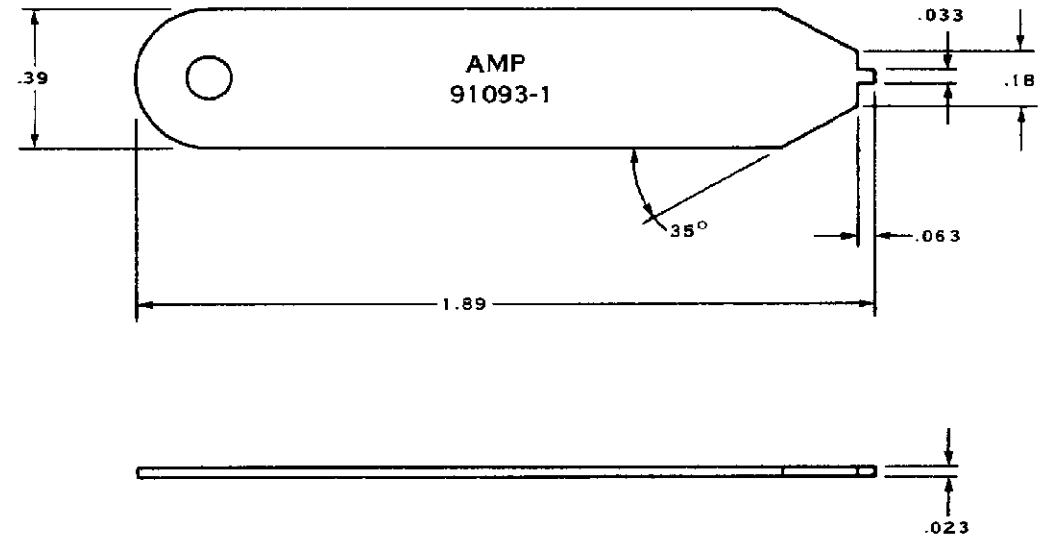

TOOL NUMBER	PRODUCT DESIGNED FOR	ENGINEERING APPROVAL	DATE
91093-1	AMP FFC Round Wire Receptacle Contacts		12-7-73

FIGURE 2

4. TOOL CERTIFICATION

The extraction tool listed on this instruction sheet should be certified with the information provided in Figure 2. We recommend that you inspect the tool immediately upon arrival in your factory, and at regularly scheduled intervals, to assure that the tool has not been damaged during handling.

Additional tools can be purchased from:

AMP Incorporated
Eisenhower Boulevard
Harrisburg, Pennsylvania 17105

Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits,General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)
Факс: 8 (812) 320-02-42
Электронная почта: org@eplast1.ru
Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.