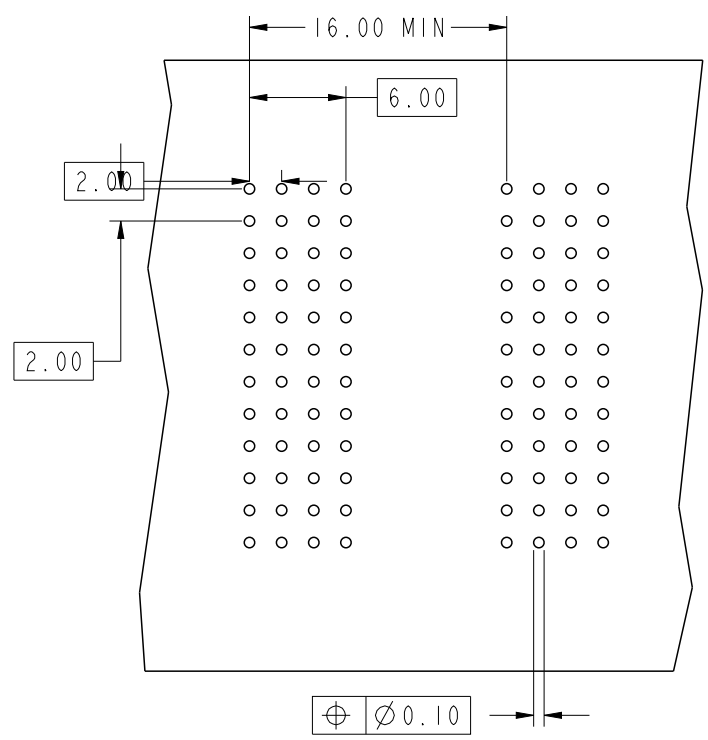





Copyright FCI.



REQUIRED PC BOARD LAYOUT
COMPONENT SIDE
SEE PRINT 58351 FOR
ADDITIONAL PCB INFORMATION

KEY		
CODE	DIMENSIONS	
	DIM "A" MATE	DIM "B" TAIL
1	5.00	4.30
2	5.75	4.30
3	6.50	4.30
4	7.25	4.30
5	5.00	13.60
6	5.75	13.60
7	6.50	13.60
8	7.25	13.60
9	5.00	17.00
10	5.75	17.00
11	6.50	17.00
12	7.25	17.00
13	8.25	4.30
14	8.25	13.60
15	8.25	17.00
16	7.00	4.30
17	7.00	13.60
18	7.00	17.00
19	8.00	4.30

KEY		
CODE	DIMENSIONS	
	DIM "A" MATE	DIM "B" TAIL
20	8.00	13.60
21	8.00	17.00
22	5.00	12.10
25	5.75	15.60
40	5.00	15.60
41	6.50	15.60
42	7.25	15.60
43	8.00	15.60
44	5.75	12.10
45	6.50	12.10
48	5.00	15.10
54	5.00	11.50
55	5.75	11.50
56	6.50	11.50
59	5.00	11.80
60	5.75	11.80
61	6.50	11.80
62	7.25	11.80
63	8.00	11.80

dr	Terran Huang	2010/07/08	projection 	MM 	size	A4	scale	21:10	
eng	Julia Wang	2012/09/19			ecn no	ELX-DG-012854-1			
chr	-	-			rel level			Released	
appr	Pei-Ming Zheng	2012/09/19	product family		METRAL				
			title		METRAL SIGNAL HEADER			rev	
			I MOD, 5 ROW PRESS-FIT		85838				
www.fci.com			cat. no.		-	Product - Customer Drw			sheet 2 of 9



Copyright FCI.

1							2							3							4										
METRAL P/N	ROW	CONTACT CODE MOD. I						METRAL P/N	ROW	CONTACT CODE MOD. I						METRAL P/N	ROW	CONTACT CODE MOD. I						METRAL P/N	ROW	CONTACT CODE MOD. I					
		1	2	3	4	5	6			1	2	3	4	5	6			1	2	3	4	5	6			1	2	3	4	5	6
85838-X01	E	25	25	25	25	25	25	85838-X05	E	44	44	44	44	44	44	85838-X09	E	N/A						85838-X13	E	3	3	3	3	3	3
	D	25	25	25	25	25	25		D	22	22	22	22	22	22		D	6	6	6	6	6	6		D	3	3	3	3	3	3
-----	C	25	25	25	25	25	25	-----	C	44	44	44	44	44	44	-----	C	6	6	6	6	6	6	-----	C	3	3	3	3	3	3
85838-X01LF	B	25	25	25	25	25	25	85838-X05LF	B	44	44	44	44	44	44	85838-X09LF	B	6	6	6	6	6	6	85838-X13LF	B	2	2	2	2	2	2
	A	25	25	25	25	25	25		A	45	45	45	45	45	45		A	6	6	6	6	6	6		A	2	2	2	2	2	2
METRAL P/N	ROW	CONTACT CODE MOD. I						METRAL P/N	ROW	CONTACT CODE MOD. I						METRAL P/N	ROW	CONTACT CODE MOD. I						METRAL P/N	ROW	CONTACT CODE MOD. I					
		1	2	3	4	5	6			1	2	3	4	5	6			1	2	3	4	5	6			1	2	3	4	5	6
85838-X02	E	1	1	1	1	1	1	85838-X06	E	1	1	1	1	1	1	85838-X10	E	N/A						85838-X14	E	16	16	16	16	16	16
	D	3	3	3	3	3	3		D	1	1	1	1	1	1		D	2	2	2	2	2	2		D	16	16	16	16	16	16
-----	C	19	19	19	19	19	19	-----	C	3	3	3	3	3	3	-----	C	2	2	2	2	2	2	-----	C	16	16	16	16	16	16
85838-X02LF	B	3	3	3	3	3	3	85838-X06LF	B	1	1	1	1	1	1	85838-X10LF	B	2	2	2	2	2	2	85838-X14LF	B	16	16	16	16	16	16
	A	1	1	1	1	1	1		A	1	1	1	1	1	1		A	2	2	2	2	2	2		A	16	16	16	16	16	16
METRAL P/N	ROW	CONTACT CODE MOD. I						METRAL P/N	ROW	CONTACT CODE MOD. I						METRAL P/N	ROW	CONTACT CODE MOD. I						METRAL P/N	ROW	CONTACT CODE MOD. I					
		1	2	3	4	5	6			1	2	3	4	5	6			1	2	3	4	5	6			1	2	3	4	5	6
85838-X03	E	3	3	3	3	3	3	85838-X07	E	19	19	19	19	19	19	85838-X11	E	N/A						85838-X15	E	13	13	13	13	13	13
	D	3	3	3	3	3	3		D	4	4	4	4	4	4		D	4	4	4	4	4	4		D	13	13	13	13	13	13
-----	C	3	3	3	3	3	3	-----	C	4	4	4	4	4	4	-----	C	4	4	4	4	4	4	-----	C	13	13	13	13	13	13
85838-X03LF	B	19	19	19	19	19	19	85838-X07LF	B	4	4	4	4	4	4	85838-X11LF	B	19	19	19	19	19	19	85838-X15LF	B	13	13	13	13	13	13
	A	3	3	3	3	3	3		A	4	4	4	4	4	4		A	19	19	19	19	19	19		A	13	13	13	13	13	13
METRAL P/N	ROW	CONTACT CODE MOD. I						METRAL P/N	ROW	CONTACT CODE MOD. I						METRAL P/N	ROW	CONTACT CODE MOD. I						METRAL P/N	ROW	CONTACT CODE MOD. I					
		1	2	3	4	5	6			1	2	3	4	5	6			1	2	3	4	5	6			1	2	3	4	5	6
85838-X04	E	3	3	3	3	3	3	85838-X08	E	20	20	20	20	20	20	85838-X12	E	7	7	7	7	7	7	85838-X16	E	17	17	17	17	17	17
	D	10	10	10	10	10	10		D	8	8	8	8	8	8		D	7	7	7	7	7	7		D	17	17	17	17	17	17
-----	C	10	10	10	10	10	10	-----	C	8	8	8	8	8	8	-----	C	7	7	7	7	7	7	-----	C	17	17	17	17	17	17
85838-X04LF	B	9	9	9	9	9	9	85838-X08LF	B	8	8	8	8	8	8	85838-X12LF	B	7	7	7	7	7	7	85838-X16LF	B	17	17	17	17	17	17
	A	10	10	10	10	10	10		A	8	8	8	8	8	8		A	3	3	3	3	3	3		A	17	17	17	17	17	17

dr	Terran Huang	2010/07/08	projection	MM	size	A4	scale	11:10				
eng	Julia Wang	2012/09/19			ecn no				ELX-DG-012854-1			
chr	-	-			rel level				Released			
appr	Pei-Ming Zheng	2012/09/19	product family		METRAL							
			title		METRAL SIGNAL HEADER			dwg no		85838	rev	BH
www.fci.com			cat. no.		-		Product - Customer Drw			sheet 3 of 9		
					I MOD, 5 ROW PRESS-FIT							




Copyright FCI.

dr	Terran Huang	2010/07/08	projection	MM	size	A4	scale	11:10	
eng	Julia Wang	2012/09/19			ecn no	ELX-DG-012854-1			
chr	-	-			rel level	Released			
appr	Pei-Ming Zheng	2012/09/19	product family		METRAL				
		title				dwg no		rev	
		METRAL SIGNAL HEADER				85838		BI	
I MOD, 5 ROW PRESS-FIT									
www.fci.com		cat. no.		-	Product - Customer Drw			sheet 4 of 9	




Copyright FCI.

dr	Terran Huang	2010/07/08	projection 	MM 	size	A4	scale	11:10			
eng	Julia Wang	2012/09/19			ecn no				ELX-DG-012854-1		
chr	-	-			rel level				Released		
appr	Pei-Ming Zheng	2012/09/19	product family		METRAL						
		title			METRAL SIGNAL HEADER			dwg no	85838	rev	BH
www.fci.com		cat. no.		-		Product - Customer Drw			sheet 5 of 9		



Copyright FCI.

ProjE File - REV C - 2009-06-09

dr	Terran Huang	2010/07/08	projection 	MM 	size	A4	scale	11:10	
eng	Julia Wang	2012/09/19			ecn no		ELX-DG-012854-1		
chr	-	-			rel level		Released		
appr	Pei-Ming Zheng	2012/09/19	product family		METRAL				
		title			METRAL SIGNAL HEADER			rev	
		I MOD, 5 ROW PRESS-FIT			dwg no			85838	
								BI	
www.fci.com		cat. no.		-		Product - Customer Drw		sheet 6 of 9	

PDS: Rev :BH

STATUS:Released

Printed: Sep 19, 2012



Copyright FCI.

1								2								3								4							
METRAL P/N	ROW	CONTACT CODE MOD. I						METRAL P/N	ROW	CONTACT CODE MOD. I						METRAL P/N	ROW	CONTACT CODE MOD. I						METRAL P/N	ROW	CONTACT CODE MOD. I					
		1	2	3	4	5	6			1	2	3	4	5	6			1	2	3	4	5	6			1	2	3	4	5	6
85838-X65	E	6	6	6	6	6	6	85838-X69	E	1	1	1	1	1	1	85838-X73	E	3	3	3	3	3	3	85838-X77	E	1	1	1	1	1	1
	D	7	7	7	7	7	7		D	2	2	2	2	2	2		D	3	3	3	3	3	3		D	2	2	2	2	2	2
-----	C	8	8	8	8	8	8	-----	C	2	2	2	2	2	2	-----	C	3	3	3	3	3	3	-----	C	2	2	2	2	2	2
85838-X65LF	B	8	8	8	8	8	8	85838-X69LF	B	2	2	2	2	2	2	85838-X73LF	B	3	3	3	3	3	3	85838-X77LF	B	2	2	2	2	2	2
	A	8	8	8	8	8	8		A	4	4	4	4	4	4		A	4	4	4	4	4	4		A	2	2	2	2	2	2
METRAL P/N	ROW	CONTACT CODE MOD. I						METRAL P/N	ROW	CONTACT CODE MOD. I						METRAL P/N	ROW	CONTACT CODE MOD. I						METRAL P/N	ROW	CONTACT CODE MOD. I					
		1	2	3	4	5	6			1	2	3	4	5	6			1	2	3	4	5	6			1	2	3	4	5	6
85838-X66	E	1	1	1	1	1	1	85838-X70	E	19	19	19	19	19	19	85838-X74	E	19	19	19	19	19	19	85838-X78	E	3	3	3	3	3	3
	D	1	1	1	1	1	1		D	19	19	19	19	19	19		D	1	1	1	1	1	1		D	2	2	2	2	2	2
-----	C	-	-	-	-	-	-	-----	C	4	4	4	4	4	4	-----	C	1	1	1	1	1	1	-----	C	2	2	2	2	2	2
85838-X66LF	B	1	1	1	1	1	1	85838-X70LF	B	2	2	2	2	2	2	85838-X74LF	B	1	1	1	1	1	1	85838-X78LF	B	2	2	2	2	2	2
	A	1	1	1	1	1	1		A	2	2	2	2	2	2		A	1	1	1	1	1	1		A	3	3	3	3	3	3
METRAL P/N	ROW	CONTACT CODE MOD. I						METRAL P/N	ROW	CONTACT CODE MOD. I						METRAL P/N	ROW	CONTACT CODE MOD. I						METRAL P/N	ROW	CONTACT CODE MOD. I					
		1	2	3	4	5	6			1	2	3	4	5	6			1	2	3	4	5	6			1	2	3	4	5	6
85838-X67	E	2	2	2	2	2	2	85838-X71	E	3	3	3	3	3	3	85838-X75	E	3	3	3	3	3	3	85838-X79	E	19	19	19	19	19	19
	D	2	2	2	2	2	2		D	3	3	3	3	3	3		D	2	2	2	2	2	2		D	19	19	19	19	19	19
-----	C	2	2	2	2	2	2	-----	C	3	3	3	3	3	3	-----	C	2	2	2	2	2	2	-----	C	3	3	3	3	3	3
85838-X67LF	B	2	2	2	2	2	2	85838-X71LF	B	3	3	3	3	3	3	85838-X75LF	B	2	2	2	2	2	2	85838-X79LF	B	3	3	3	3	3	3
	A	1	1	1	1	1	1		A	2	2	2	2	2	2		A	2	2	2	2	2	2		A	1	1	1	1	1	1
METRAL P/N	ROW	CONTACT CODE MOD. I						METRAL P/N	ROW	CONTACT CODE MOD. I						METRAL P/N	ROW	CONTACT CODE MOD. I						METRAL P/N	ROW	CONTACT CODE MOD. I					
		1	2	3	4	5	6			1	2	3	4	5	6			1	2	3	4	5	6			1	2	3	4	5	6
85838-X68	E	60	60	60	60	60	60	85838-X72	E	6	6	6	6	6	6	85838-X76	E	4	4	4	4	4	4	85838-X80	E	1	1	1	1	1	1
	D	59	59	59	59	59	59		D	8	8	8	8	8	8		D	3	3	3	3	3	3		D	3	3	3	3	3	3
-----	C	60	60	60	60	60	60	-----	C	8	8	8	8	8	8	-----	C	3	3	3	3	3	3	-----	C	3	3	3	3	3	3
85838-X68LF	B	60	60	60	60	60	60	85838-X72LF	B	8	8	8	8	8	8	85838-X76LF	B	3	3	3	3	3	3	85838-X80LF	B	3	3	3	3	3	3
	A	61	61	61	61	61	61		A	6	6	6	6	6	6		A	3	3	3	3	3	3		A	1	1	1	1	1	1

dr	Terran Huang	2010/07/08	projection	MM	size	A4	scale	11:10
eng	Julia Wang	2012/09/19			ecn no		ELX-DG-012854-1	
chr	-	-			rel level		Released	
appr	Pei-Ming Zheng	2012/09/19	product family		METRAL			
		title			dwg no		rev	
		METRAL SIGNAL HEADER			85838		BH	
		I MOD, 5 ROW PRESS-FIT						
www.fci.com		cat. no.		Product - Customer Drw		sheet 7 of 9		




Copyright FCI.

METRAL P/N	ROW	CONTACT CODE MOD. I					
		1	2	3	4	5	6
85838-X81	E	3	3	3	3	3	3
	D	1	1	1	1	1	1
	C	1	1	1	1	1	1
-----	B	1	1	1	1	1	1
	A	1	1	1	1	1	1

METRAL P/N	ROW	CONTACT CODE MOD. I					
		1	2	3	4	5	6
85838-X82	E	1	1	1	1	1	1
	D	1	1	1	1	1	1
	C	2	2	2	2	2	2
-----	B	1	1	1	1	1	1
	A	1	1	1	1	1	1

METRAL P/N	ROW	CONTACT CODE MOD. I					
		1	2	3	4	5	6
85838-X83	E	1	1	-	1	1	1
	D	3	3	-	3	3	3
	C	-	-	3	3	3	3
-----	B	3	3	-	3	3	3
	A	1	1	-	1	1	1

dr	Terran Huang	2010/07/08	projection 	MM 	size	A4	scale	11:10
eng	Julia Wang	2012/09/19			ecn no	ELX-DG-012854-1		
chr	-	-			rel level	Released		
appr	Pei-Ming Zheng	2012/09/19	product family		METRAL			
		title			METRAL SIGNAL HEADER			rev
					I MOD, 5 ROW PRESS-FIT			
www.fci.com		cat. no.			-			sheet 8 of 9
					Product - Customer Drw			



Copyright FCI.

PRODUCT NUMBER

85838-XYX

85838-XYXLF

NOTES:


- FOR DIM A AND B SEE SHEET 2 AND UP.
- BODY MATERIAL: LIQUID CRYSTAL POLYMER 30 % GLASS.
FLAME RETARDANT ACC. UL 94-V0.
- PIN MATERIAL:
PHOSPHOR BRONZE.
- PLATING ON PRESS-FIT TAIL: 85838-XYX IS SnPb, 85838-XYXLF IS Sn(LEAD FREE)
CONTACT AREA CONFORMS TO PERFORMANCE LEVEL SHOWN IN TABLE BELOW.
- PRODUCT MARKING:
PART NUMBER DESIGNATION & BATCH I.D.
- ALL PRODUCTS WITH PART NUMBERS SHOWN IN SUBSEQUENT TABLES WILL BE PACKAGED IN TUBES.
IF TRAY PACKAGING IS REQUIRED, A SUFFIX "P" WILL BE ADDED TO THE END OF THE PART NUMBER.
EXAMPLE: XXXXX-XXXP
- PRODUCT SPECIFICATION: GS-12-180
APPLICATION SPECIFICATION: BUS-20-073
- AFTER INSERTION INTO CIRCUIT BOARD WITH QUALIFIED TOOL.
- A PLATING HAS Au FLASH IN PRESS FIT AREA (LEAD FREE).

10. THE PRODUCTS WHERE THE PART NUMBER ENDS IN LF MEET THE EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY REGULATIONS AS DESCRIBED IN GS-22-008.

ALL PRODUCTS EXCEPT THOSE WITH PART NUMBERS CONTAINING (DRAWING NO.)-NI--- OR (DRAWING NO.)-N5---WILL WITHSTAND EXPOSURE TO 260°C FOR 60 SECONDS IN A CONVECTION, INFRA-RED OR VAPOR PHASE REFLOW OVEN. PART NUMBERS (DRAWING NO.)-NI--- AND (DRAWINGS NO.)-N5---WILL NOT WITHSTAND REFLOW AND Au CONTACT SURFACE OF THE CONTACTS SHALL BE EXPOSED TO A MAXIMUM 140°C FOR NO LONGER THAN 15 SECONDS IN A WAVE SOLDER APPLICATION.

PLATING IN CONTACT AREA

DASH NUMBER	PERFORMANCE LEVEL	NOTES
-	-	-
-AYY	TELCORDIA CO (SEE NOTE 9)	-
-NIYY	TELCORDIA CO (NXT)	-
-N5YY	TELCORDIA UE (NXT)	-
-IYY	TELCORDIA CO	-
-2YY	TELECOM CLASS	-
-3YY	IEC CLASS I	-
-5YY	TELCORDIA UE	-
-AYXLF	TELCORDIA CO (SEE NOTE 9)	SEE NOTE 10
-NIYXLF	TELCORDIA CO (NXT) IEC CLASS I	SEE NOTE 10
-N5YXLF	TELCORDIA UE (NXT)	SEE NOTE 10
-IYXLF	TELCORDIA CO IEC CLASS I	SEE NOTE 10
-2YXLF	TELECOM CLASS	SEE NOTE 10
-5YXLF	TELCORDIA UE	SEE NOTE 10

dr	Terran Huang	2010/07/08	projection 	MM 	size	A4	scale	11:10					
eng	Julia Wang	2012/09/19			ecn no	ELX-DG-012854-1							
chr	-	-			rel level	Released							
appr	Pei-Ming Zheng	2012/09/19	product family		METRAL								
		title			METRAL SIGNAL HEADER			dwg no		85838		rev	BH
www.fci.com		cat. no.		-		Product - Customer Drw				sheet 9 of 9			



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.