


Humble Pi v1.3 Getting started guide

CISECO

Always read this guide before beginning. This kit requires basic soldering skills before use.

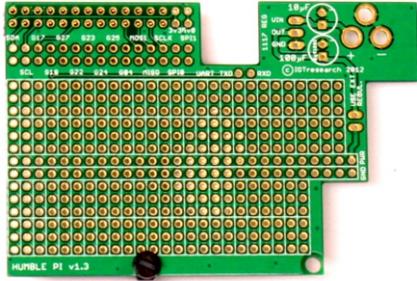

The Humble Pi is a self assembly add on for the Raspberry Pi computer. The board has a large electronic prototyping area for soldering parts to make custom circuits connected to the Pi. The solderable pads are arranged in threes around two central power connectors. This makes the Humble Pi the easiest product of its type to use. All the GPIO pins for the Pi are broken out into easy to solder pads. There is space to add an optional voltage regulator to power projects when the power from the Pi is insufficient.

1 You will need these tools

- 1 x Soldering iron
- 1 x Length of electronics solder wire (not plumbers solder)
- 1 x Side cutters




Optional but will make the build much easier

- 1 x Blob of Bluetack
- 1 x Multimeter (preferably with continuity check)



Note: The Bluetack is very good at holding parts while soldering. Checking the solder joints for good connections will in our experience save you time overall

2 First check the contents for 4 items

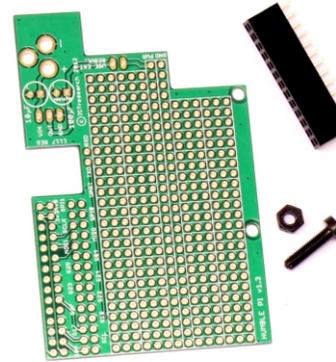

- 1 x Green printed circuit board (PCB)
- 1 x 2x13 female 2.54mm pitch connector
- 1 x M3.5 12mm nylon screw
- 1 x M3.5 nylon nut


For help please email: somethingismissing@ciseco.co.uk

3 Deciding what order to fit the parts

We suggest you normally start with the smallest height parts first, leaving the larger parts till later on, this usually leaves most room to manoeuvre the iron.

Dry fit the parts

What is a really good thing to do on boards where the parts are close to each other is to do a "dry fit" first.

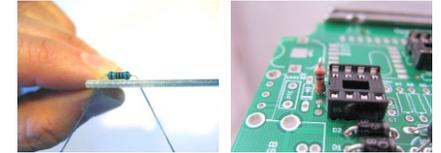

This means pushing parts into place without soldering so you can decide what order is easiest for you. Left handed people almost always decide to do things in a different order to a right handed person for example. The order is ultimately up to you so don't rush in, think about it first.

Not confident in soldering?

Google "soldering guide" or "soldering how to". There's many great articles that people have produced. There's videos on YouTube also. Soldering is simple to learn. Why not ask your local school / college for a little help or what we hope people have near them is a Hackspace or Makerspace (google it) they are brilliant places to join.

4 Solder the parts

Soldering normal electronic parts (none in this kit)

1. Carefully push the part through the board, hold in place by either Bluetack or gently bending the part legs before turning upside down to solder. DO NOT hold with your finger, most parts easily conduct heat, don't burn yourself!

Soldering connectors (some are in this kit)

1. Using the Bluetack or your fingers, hold the connector in place and solder just a single pin at one end.
2. Check that the connector is aligned in every direction, if not simply reheat for a second or two and gently move. Avoid excessive heat and always be patient, soldering is a skill anyone can do badly, doing it well is about practice and not rushing things.
3. When you are happy, solder the pin at the opposite end of the connector. Check visually **very carefully** again as this is the last time it will be easy to move position of the part. Complete by soldering the rest of the connector pins.

Soldering surface mount parts (none in this kit)

1. Tin (cover in a coat of solder) a single pad first, put the part on top, perfectly aligned with the other pads. Melt the tinned pad so that the first pin is soldered down. Re melt till the part is aligned then solder the rest of the pads. Tweezers are perfect for holding parts, whilst soldering.

Handy tips for this kit (the Humble Pi)


1. Only install the connectors you actually need for your project you can always add the ones you didn't use later if needed.

5 Locations of the parts

Install the 2 row x 13 way header as shown, make sure the end 4 holes are not soldered.



The spacer nut and bolt can be used in any hole, you should decide where this gives greatest stability.



6 Check everything


Even if you are confident in soldering, please still check your work. Almost all the problems we see (where boards do not function correctly) are down to a poor/dry joint somewhere.

With a multimeter make sure you have good connections between the various pins. On the back of this page is the schematic layout so you can see what is connected where.




Testing & Building your projects

Build and test as you go in small stages, take your time and always check twice before soldering, this extra small amount of effort is always worthwhile. Rushing is the best recipe for getting things wrong, backwards or poorly soldered.

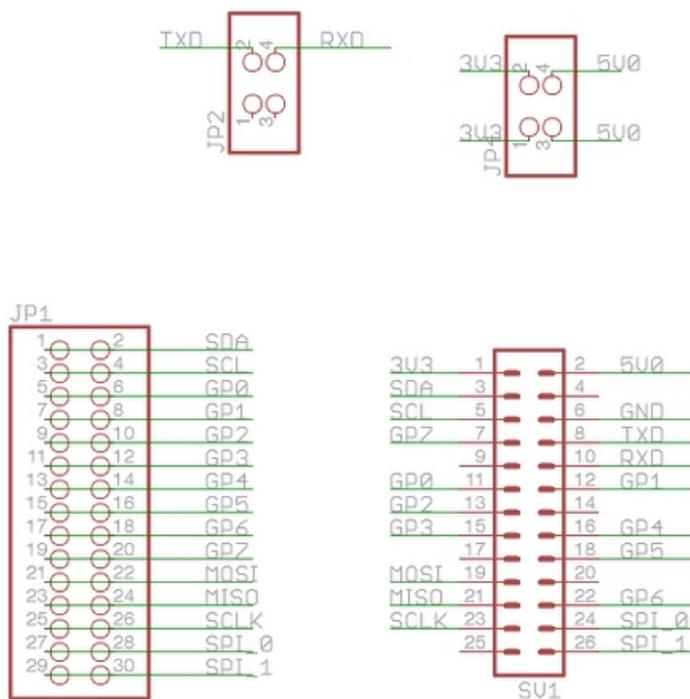

The parts for the regulator section are available as an option, the circuit is shown for completeness as the tracks exist on the PCB.

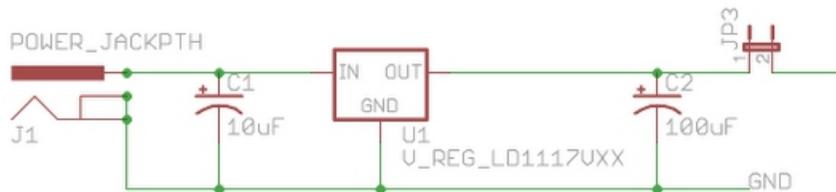

Now your kit is built here comes the interesting part. What are you going to do with it? Our forum is a great place to discuss your ideas with others. We love to hear what people are up to and have built.

Feel free to drop in and say hello. Our forum is not just about our products it's also intended for any discussion and sharing about the use of computers with microcontrollers, electronics and wireless.

www.openmicros.org



what your board might look when installed

Last point of manufacture UK

Ciseco Plc,
Cleantech Centre,
St Peters St,
Nottingham
NG7 3EN

Always recycle where possible.

Blutack is a registered name of Bostik Limited

Raspberry Pi is a registered name of the Raspberry Pi Foundation





Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.