
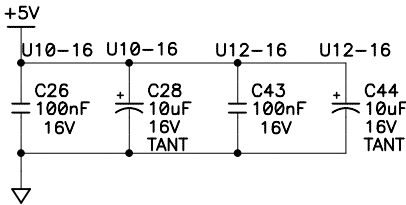
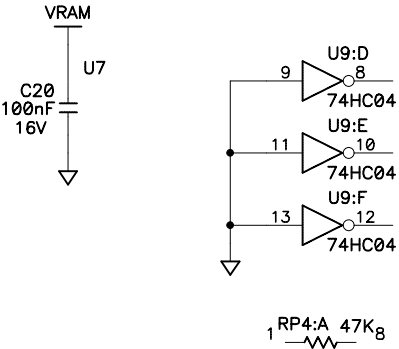
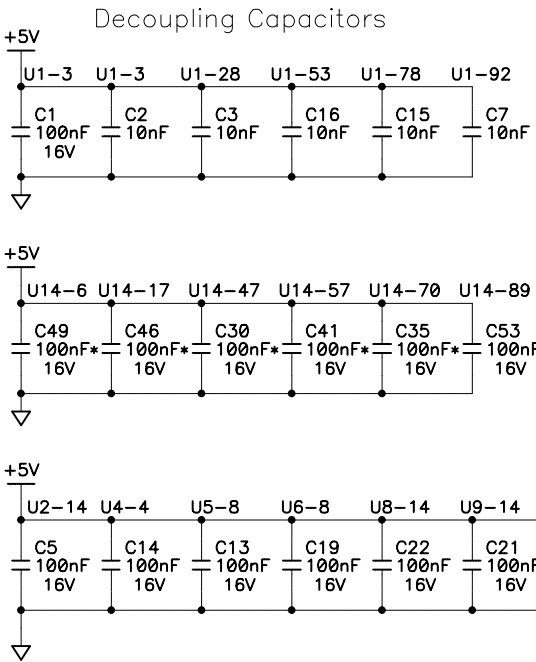


- NOTES: UNLESS OTHERWISE SPECIFIED;
1. ALL RESISTOR VALUES ARE IN OHMS, 1/16W, 5%
 2. ALL JUMPER RESISTORS ARE 0 OHMS 0805 PACKAGE.
 3. ALL CAPACITORS ARE 50VDC OR HIGHER.
 4. THE ORIGIN SOURCE OF A VOLTAGE IS REPRESENTED BY ($\overset{VCC}{\uparrow}$), AND ALL REFERENCES TO THAT VOLTAGE ARE REPRESENTED BY ($\overset{VCC}{\text{---}}$).

5 OUTLINED CIRCUIT NOT STUFFED.

6. COMPONENT VALUES SHOWN WITH AN ASTERISK (*) FOLLOWING THE VALUE, MAY HAVE DIFFERENT VALUES OR MAY NOT BE STUFFED DEPENDING ON MODEL. SEE STUFFING CHART FOR CLARIFICATION.

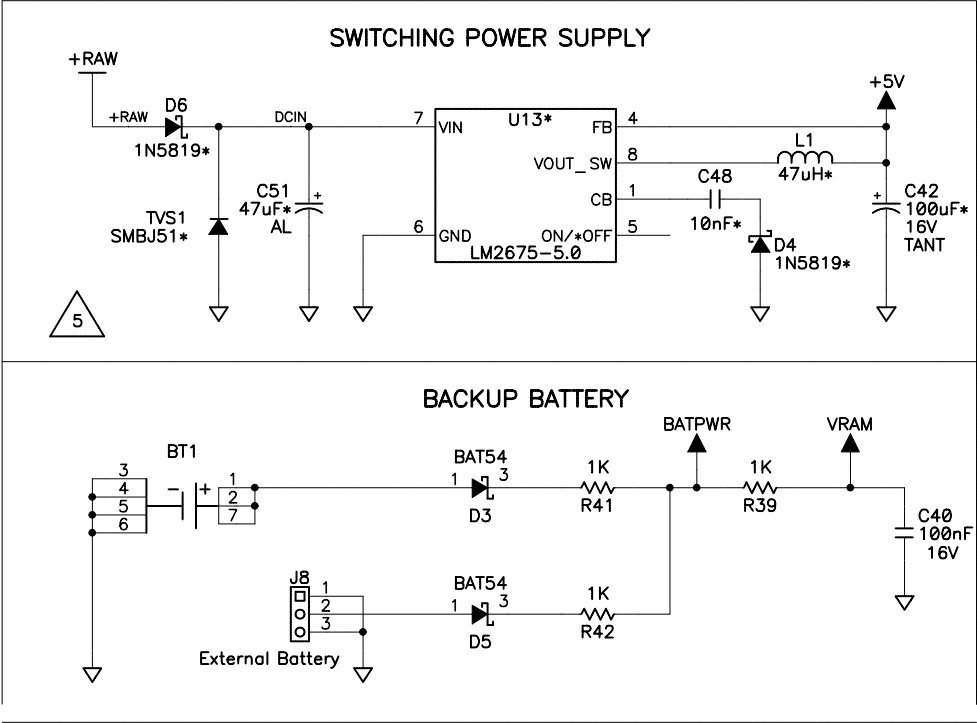

REVISION HISTORY			REVISION APPROVAL			
REV	ECO	DESCRIPTION	PROJECT ENGINEER	APPROVAL DATE	DOCUMENT CONTROL	APPROVAL DATE
A	E11809	INITIAL RELEASE	XT	2/4/02	KIS	2/4/02
B	E11834	REMOVE UNUSED REFERENCES FOR CLARIFICATION	XT	2/15/02	KIS	2/15/02
C	E12084	REMOVE RT1, CHANGE R1 TO 11K (BATTERY CIRCUIT PG. 2)	XT	9/19/02	KIS	9/19/02
D	E12311	REMOVE PD5 FROM J1, REWIRE PD5 TO ETHRNET (U14).	XT	6/19/03	KIS	6/18/03
E	E12402	IMPROVE ETHERNET JACK. REMOVE CAPS, BETTER CONNECTOR.	XT	9/23/03	KF	9/23/03

REF DES	DEVICE	DEVICE VOLTAGE INFORMATION				DEVICE: FILTER CAP REF DES(s)
		GND	+5V	VRAM	NO CONNECTS	
U1	RABBIT 2000	2,27,39, 52,77,89	3,28,53,78,92			PIN3 – C14 + C15 C23, C24, C17, C16
U2	74HC08	7	14			C5
U3	74AHC1GU04	3	5			
U4	ETC811L	1	4			C14
U5	FLASH	24	8			C13
U6	SP483E	5	8			C19
U7	SRAM 512K X 8	16		32		C20
	SRAM 128K X 8	16		32		
U8	74HC125	7	14			C22
U9	74HC04	7	14			C21
U10	232A	15	16			C26, C28
U11	FLASH	24	8			C29
U12	232A	15	16			C43, C44
U13	LM2575–5.0				2–6,9,11,13,16, 19–24	
U14	RTL8019AS	14,28,44, 52,83,86	6,17,47, 57,70,89			C48, C44, C32, C45, C46, C49

APPEND THE FOLLOWING DOCUMENTS WHEN CHANGING THIS DOCUMENT:		DRAWING CONTENT:		TITLE	
		DRAWN BY: (INITIAL RELEASE)		SCHEMATIC DIAGRAM SR9150/9160 SMART STAR CPU	
		XUAN TRUONG	2/4/02		
		REVISED BY:			
		K.FREEMAN	9/23/03		
		APPROVALS: INITIAL RELEASE		SIZE B DWG NO. 090-0129	
		PROJECT ENGINEER:			
		XUAN TRUONG	2/4/02		
		ENGINEERING MANAGER:			
		R.MATTHEWS	2/4/02		
		SIGNATURES	DATE	SCALE NONE	RELEASE DATE 2/4/02
				SHEET 1 OF 5	

COPYRIGHT 2003, Z-WORLD, INC.



STUFFING TABLE

		MODEL	
CIRCUIT	PART	SR9150	SR9160
POWER SUPPLY (PAGE 1)	TVS1	NOT INSTALLED	NOT INSTALLED
	C51	NOT INSTALLED	NOT INSTALLED
	C48	NOT INSTALLED	NOT INSTALLED
	C42	NOT INSTALLED	NOT INSTALLED
	D4, D6	NOT INSTALLED	NOT INSTALLED
	U13	NOT INSTALLED	NOT INSTALLED
	L1	NOT INSTALLED	NOT INSTALLED
SRAM (PAGE 2)		R35, R38	NOT INSTALLED
	MAIN	U7	128K SRAM
	SRAM SELECT	JP3	ZERO ohm ACROSS PINS 1–2
FLASH (PAGE 2)	FLASH 1	U11	256K FLASH
	FLASH 1 SELECT	JP4	ZERO ohm ACROSS PINS 1–2
	ADDR. BANK SELECT	JP5	ZERO ohm ACROSS PINS 1–2
	FLASH 2	U5	256K FLASH
	FLASH 2 SELECT	JP2	ZERO ohm ACROSS PINS 1–2

		MODEL	
CIRCUIT	PART	SR9150	SR9160
ETHERNET (PAGE 3)	C50, C52	NOT INSTALLED	NOT INSTALLED
	C45, C47	10nF	NOT INSTALLED
	C31, C36	10pF	NOT INSTALLED
	C30, C35	100nF–16V	NOT INSTALLED
	C41, C46	100nF–16V	NOT INSTALLED
	C49, C53	100nF–16V	NOT INSTALLED
	Q1	3904 NPN	NOT INSTALLED
	DS2	GREEN LED	NOT INSTALLED
	DS3	YELLOW LED	NOT INSTALLED
	R43	0 ohm	NOT INSTALLED
	R40	200 ohm	NOT INSTALLED
	R33	1M	NOT INSTALLED
	R32	0 ohm	NOT INSTALLED
	R25, R27	330 ohm	NOT INSTALLED
	R23, R44	10K	NOT INSTALLED
	U14	RTL8019AS	NOT INSTALLED
	Y3	20 MHZ CRYSTAL	NOT INSTALLED
	J7	RJ–45	NOT INSTALLED



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.