

# Common Mode Line Filter

ALFT-09V



RoHS/RoHS II Compliant



16.5 x 11.5 x 17.0mm

## FEATURES:

- Presents High Common Mode Impedance
- Enables significant noise suppression at high frequency

## APPLICATIONS:

- Filtering common mode noise in USB, IEEE1394, LVDS, Digital Camera, Scanner.
- Digital audio and video equipments such as PDA, DSC, DVC, DVD Player.

## ELECTRICAL SPECIFICATIONS:

Part Number ALFT-09V-Inductance Code	L (mH) min.	DCR Max ( $\Omega$ )	$I_r$ ( $A_{rms}$ )
ALFT-09V-501	0.5	0.2	1.4
ALFT-09V-102	1.0	0.4	1.0
ALFT-09V-202	2.0	0.8	0.7
ALFT-09V-502	5.0	1.6	0.5
ALFT-09V-802	8.0	2.5	0.4
ALFT-09V-103	10.0	3.6	0.3

### Test Conditions

Hipot: 1500V<sub>RMS</sub>/60Hz/3mA/3sec

$I_r$ : Based on temperature rise at 40°C max


### Operating Temperature

-40°C to +125°C


### Storage Temperature

-40°C to +125°C

Common Mode  
Measuring circuit :




Differential Mode  
Measuring circuit :




## ELECTRICAL CHARACTERISTICS:


ALFT-09V-501




ALFT-09V-202



ALFT-09V-102



ALFT-09V-103



# Common Mode Line Filter







16.5 x 11.5 x 17.0mm


ALFT-09V



RoHS/RoHS II Compliant

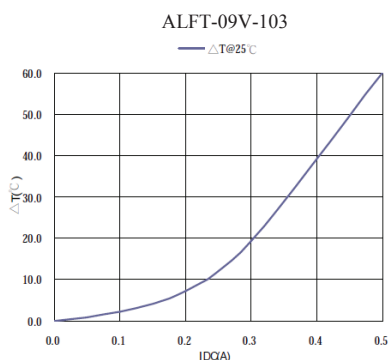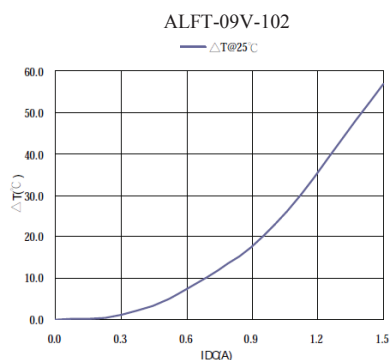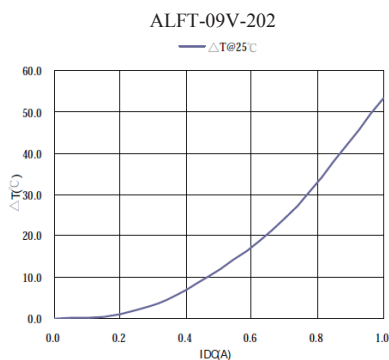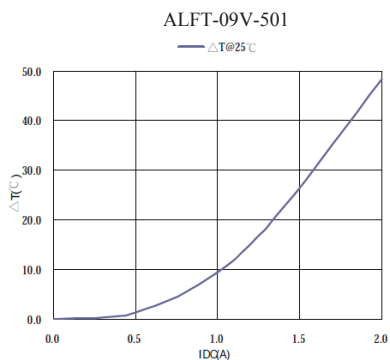

## OUTLINE DRAWING:

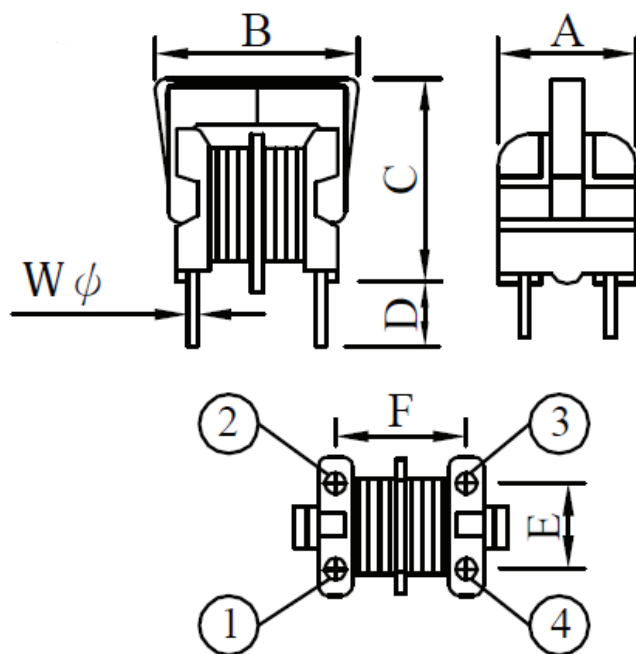

A	B	C	D	E	F	WΦ
11.5 max	16.5 max	17.0 max	5.0 ±1.0	7.0 ±0.5	8.0 ±0.5	0.6 ±0.05

Dimensions: mm

ABRACON IS  
ISO 9001:2008  
CERTIFIED



**ABRACON**  
CORPORATION

Visit [www.abracon.com](http://www.abracon.com) for Terms & Conditions of Sale  
30332 Esperanza, Rancho Santa Margarita, California 92688  
tel 949-546-8000 | fax 949-546-8001 | [www.abracon.com](http://www.abracon.com)

Revised: 01.02.14

# Common Mode Line Filter

ALFT-09V




RoHS/RoHS II Compliant



16.5 x 11.5 x 17.0mm

## SCHEMATICS

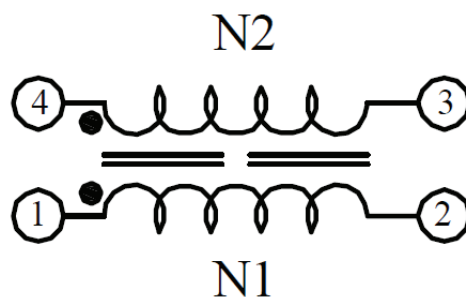

Packing 288pcs/Box

**ATTENTION:** Abracon Corporation's products are COTS – Commercial-Off-The-Shelf products; suitable for Commercial, Industrial and, where designated, Automotive Applications. Abracon's products are not specifically designed for Military, Aviation, Aerospace, Life-dependant Medical applications or any application requiring high reliability where component failure could result in loss of life and/or property. For applications requiring high reliability and/or presenting an extreme operating environment, written consent and authorization from Abracon Corporation is required. Please contact Abracon Corporation for more information.

ABRACON IS  
ISO 9001:2008  
CERTIFIED



**ABRACON**  
CORPORATION

Visit [www.abracon.com](http://www.abracon.com) for Terms & Conditions of Sale  
30332 Esperanza, Rancho Santa Margarita, California 92688  
tel 949-546-8000 | fax 949-546-8001 | [www.abracon.com](http://www.abracon.com)

Revised: 01.02.14



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



#### Как с нами связаться

**Телефон:** 8 (812) 309 58 32 (многоканальный)

**Факс:** 8 (812) 320-02-42

**Электронная почта:** [org@eplast1.ru](mailto:org@eplast1.ru)

**Адрес:** 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.