



Altera[®] SoC SOLUTIONS




Larg2

S.O.M. DIMM Board Format	1 x 25 MHz Oscillator (HPS I/P)
Altera SoC with ARM [®] Cortex [™] -A9	132 x FPGA I/O (DIMM)
Linux [™] operating system support	4 x Expander I/O (DIMM)
Processor boot from SPI Flash or SD card	1 x Expander Interrupt (I/O Event)
3 x LEDs (HPS Controlled)	4 x Single / 2 Differential Clock O/P (DIMM)
1 x H/W MAC Address	1 x 10/100/1000 Ethernet I/F (DIMM)
1 x Battery Holder	1 x USB OTG I/F (DIMM)
1 x Remote Reset Switch Header	2 x I ² C I/F (DIMM)
1 x Push Switch For Warm Reset	1 x SPI I/F (DIMM)
25K (Opt 40/85/110K) LE Programmable Logic	3 x LEDs (HPS Controlled)
512 M Byte DDR3	1 x MicroSD [®] Card Socket
2 x SPI Flash	Main Power Input 7-28V (5V Option)
1 x FT232 USB I/F supporting Debug COM port	I/O Power Input Provided From Host (1.8-3.3V)

Larg2 is aimed at control applications either in standalone operation or slaved to a hosting device (e.g. via USB COM or Ethernet interfaces). The marriage of the powerful dual-core ARM Cortex-A9 processor, a user programmable FPGA fabric and Linux operating systems make the Larg2 a very cost effective, high performance, high accuracy, and low power computing platform.


The small 52mm x 134mm (2.0" x 5.3") size of the Larg2 allows it to fit into those often small corners of your system enclosure. The wide range power input has enough compliance range to allow stable operation from a small stack of standard batteries for this remote location applications.

Larg2 can offer high accuracy control not possible in a more generic processing systems. The large array of I/O direct from FPGA part of the Altera SoC allows the timing of signals to resolution of a few nanoseconds for those ultra-critical functions.

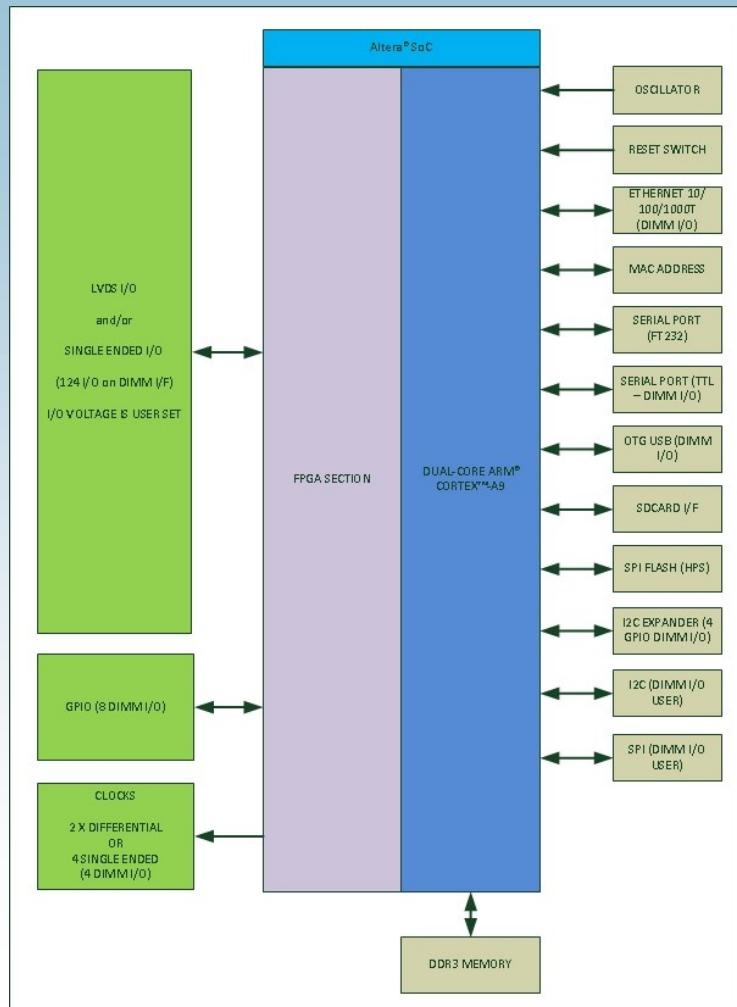

Larg2 Block Diagram

Larg Breakout Board

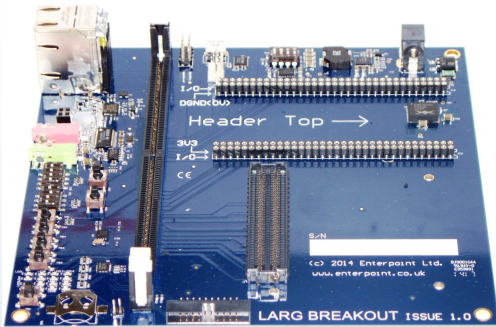

The Larg Breakout Board supports your development process and it also allows FMC modules to be used in conjunction with Larg2. This low cost design demonstrates the cost effectiveness of Larg2 in real applications.

A competitively priced custom breakout board design service is available to customers. Typically¹ designs or prototypes can be delivered in 1-6 weeks. Email us for details of this service on boardsales@enterpoint.co.uk.

1 - Assumes parts are available in time frame and design is of similar complexity to design shown.

OEM Board Options and Semi-Custom Derivative Boards Designs

As with all Enterpoint development products the Larg2 design can either be offered in a custom BOM configuration or even a customised derivative product to suit individual customer needs. Both manufacturing licensing and turnkey manufacture options are available to customers on such designs. For turnkey manufacturing options there is no minimum order quantity. Equally we can offer middle, high and very high volume manufacturing of designs to suit your individual needs. For these options and our ultra high speed design and manufacturing services email us on boardsales@enterpoint.co.uk.



Enterpoint Ltd.

Unit1, Howsell Road Industrial Estate, Malvern, UK

Tel- +44 (0) 121 288 3945

Email- boardsales@enterpoint.co.uk

Web:- www.enterpoint.co.uk



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.