


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION SEPT., 2006.
 © COPYRIGHT 2006 BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

LOC		DIST		REVISIONS			
P	LTR	DESCRIPTION	DATE	DWN	APVD		
	B	ECO-09-003420	11 Mar 09	RITA	BOB		

- NOTES**
- 1 SINGLE PACK IN ACCORDANCE WITH AMP SPEC 107-3275
 - 2 100 TRAY PACK IN ACCORDANCE WITH AMP SPEC 107-3275
 - 3 Au PLATING
 - 4 Ni PLATING
 - 5 THIS ITEM MUST BE WHITE
 - 6 HAND TOOL: 9-1478240-0
 - 7 DIE SET: SEE TABLE
 - 8 FOR TECHNICAL DATA REFER TO YOUR LOCAL TYCO ELECTRONICS SALES OFFICE
 - 9 ALL DIMENSIONS ARE NOMINAL FOR REFERENCE ONLY UNLESS OTHERWISE STATED

	7.4	6.5	0.7	5.45	3.8	9-1478242-0	RG59B/U, 62A/U, 140/U, 210/U, URM90, KX 6A, KX 25, KX 52, KX 53	5-1814801-3
	7.4	6.5	0.7	5.45	3.8	9-1478242-0	RG59B/U, 62A/U, 140/U, 210/U, URM90, KX 6A, KX 25, KX 52, KX 53	5-1814801-2
	6.4	5.4	0.7	4.5	3.1	9-1478242-0	RG179B/U, 187A/U, URM111	5-1814801-1
	6.4	5.4	0.7	4.5	3.1	9-1478242-0	RG179B/U, 187A/U, URM111	5-1814801-0
	E	D	C	B	A	DIE SET	CABLE GROUPS	PART NO.

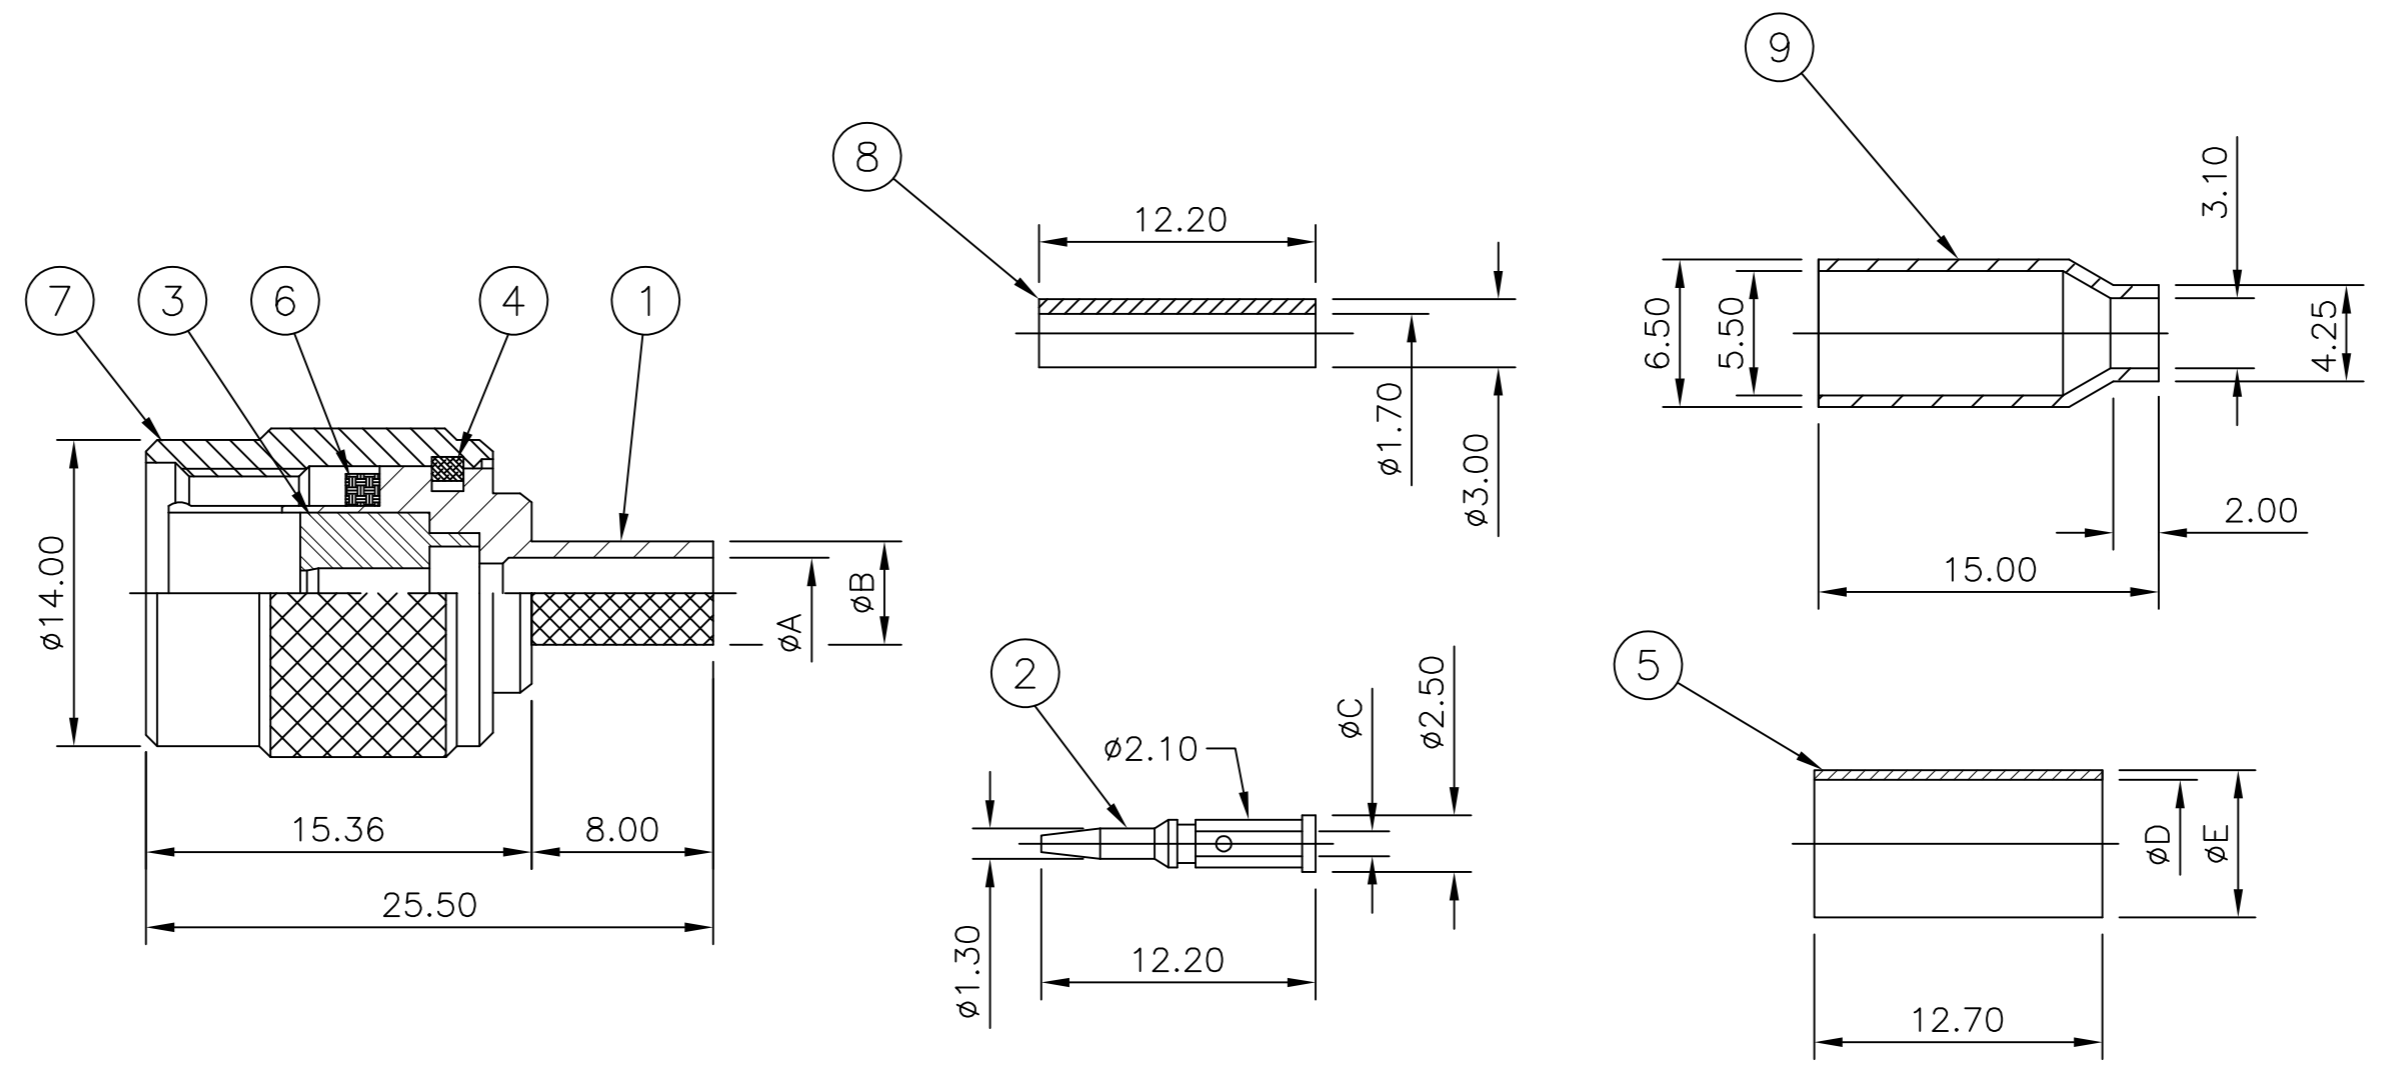

QTY	UNIT	MATERIAL	DESCRIPTION	ITEM
1	1	BRASS	FERRULE	9
1	1	NYLON	PUSHER SLEEVE	8
1	1	ZINC ALLOY	COUPLING NUT	7
1	1	SILCON RUBBER	GASKET	6
1	1	BRASS	FERRULE	5
1	1	BRASS	CIRCLIP	4
1	1	POLYMETHYLPENTENE	INSULATOR	3
1	1	BRASS	CONTACT	2
1	1	ZINC ALLOY	BODY	1
5	35	25	15	0
			MATERIAL	DESCRIPTION
				ITEM





THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN RITA ZUO 11 Mar 09	Tyco Electronics Tyco Electronics Corporation Kunshan, Jiangsu, PRC 215312	
DIMENSIONS: MM		CHK ANSON MA 11 Mar 09	NAME TNC STRAIGHT PLUG HEX CRIMP 75 OHM	
TOLERANCES UNLESS OTHERWISE SPECIFIED		APVD BOB ZHAO 11 Mar 09	DRAWING NO C=1814801	
0 PLC ± 1 PLC ± 2 PLC ± 3 PLC ± 4 PLC ± ANGLES ±		PRODUCT SPEC 108-112000	RESTRICTED TO	
MATERIAL SEE TABLE		APPLICATION SPEC SEE SHEET 2	SCALE A2 00779	REV B
FINISH SEE TABLE		WEIGHT -	CAGE CODE 00779	SHEET 1 OF 2
		CUSTOMER DRAWING	SCALE NTS	REV B

1814801

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION SEPT , 2006.
 © COPYRIGHT 2006 BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS					
E	B	P	LTR	DESCRIPTION	DATE	DWN	APVD
		-		SEE SHEET 1		-	-

COMPONENTS

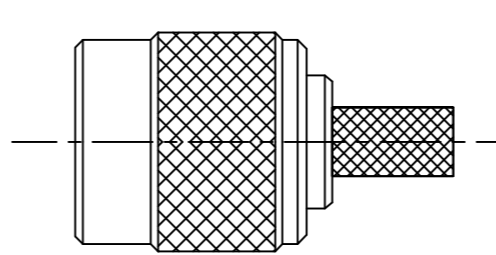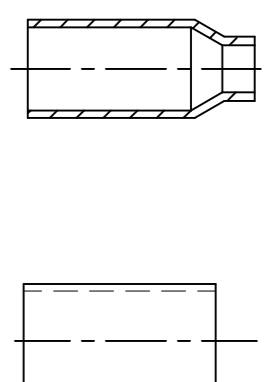
	MAIN BODY (ITEM 1,3,4,6,7 & 8)	CENTRE CONTACT (ITEM 2)	PUSHER SLEEVE (ITEM 9)	CRIMP FERRULES (ITEM 5 & 10)
				

ASSEMBLY INSTRUCTION


CABLES: RG58C/U, 141A/U, 303/U, URM43, 76, BELDEN 9907, KX15

CABLES: RG174A/U, 188A/U, 316/U, URM95, KX3B, KX22A


STEP 1
1. SLIDE METAL CRIMP FERRULE OVER CABLE

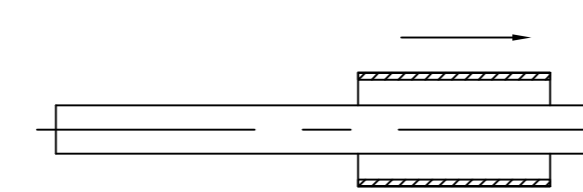


STEP 1
1. SLIDE METAL CRIMP FERRULE OVER CABLE

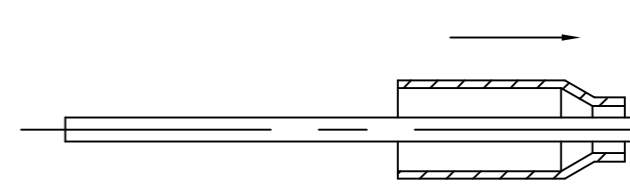


STEP 2
1. STRIP CABLE TO DIMENSIONS AS SHOWN

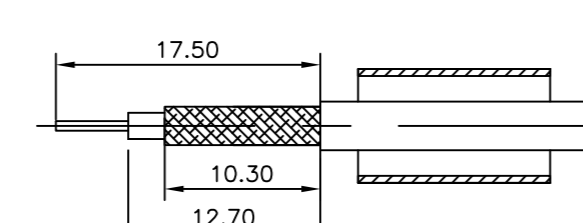


STEP 2
1. STRIP CABLE TO DIMENSIONS AS SHOWN

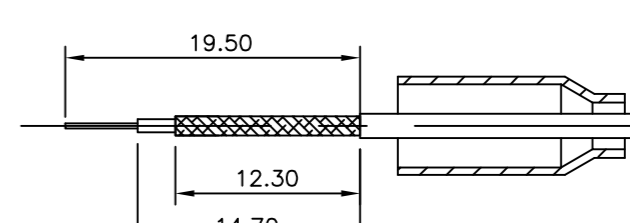


STEP 3
1. FIT CONTACT OVER CENTRE CONDUCTOR TO BUTT AGAINST DIELECTRIC.
2. CRIMP USING TOOL AS NOTES ON PAGE 1.

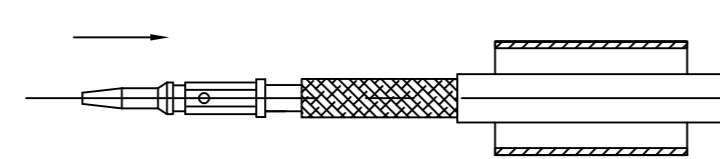

RECOMMENDED CENTRE CONTACT A/F HEX




STEP 3
1. SLIDE ITEM 10 PUSHER SLEEVE OVER DIELECTRIC BEFORE FITTING THE CONTACT.
2. FIT CONTACT OVER CENTRE CONDUCTOR TO BUTT AGAINST DIELECTRIC.
3. CRIMP USING TOOL AS NOTES ON PAGE 1.

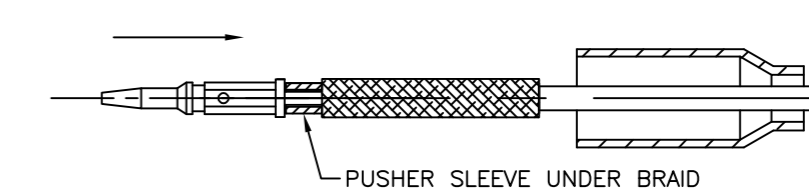


PUSHER SLEEVE UNDER BRAID

RECOMMENDED CENTRE CONTACT A/F HEX




STEP 4
1. PRESS SUB-ASSEMBLY INTO BODY, UNTIL CONTACT IS FULLY LOCATED BY AN AUDIBLE CLICK.
2. ENSURE THAT KNURLED HOUSING INSERTS BETWEEN THE DIELECTRIC AND CABLE BRAID.

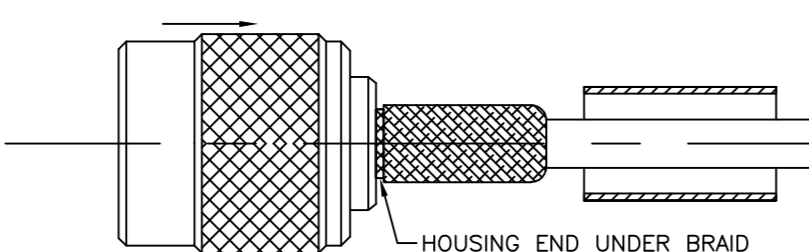


HOUSING END UNDER BRAID

STEP 4
1. PRESS SUB-ASSEMBLY INTO BODY, UNTIL CONTACT IS FULLY LOCATED BY AN AUDIBLE CLICK.
2. ENSURE THAT KNURLED HOUSING INSERTS BETWEEN THE PUSHER SLEEVE AND CABLE BRAID.

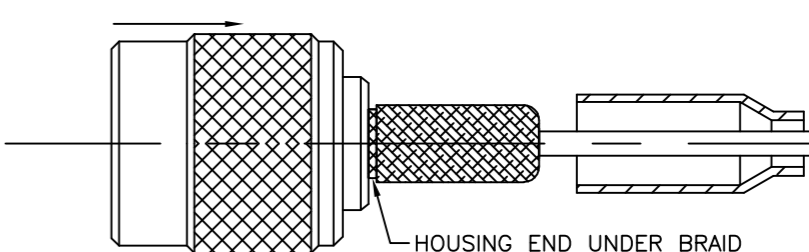


HOUSING END UNDER BRAID


STEP 5
1. SLIDE CRIMP FERRULE ALONG THE CABLE UNTIL IT BUTTS AGAINST THE HOUSING BODY.
2. CRIMP USING TOOL AS NOTED ON PAGE 1.
3. CRIMP DIMENSION AS SHOWN.

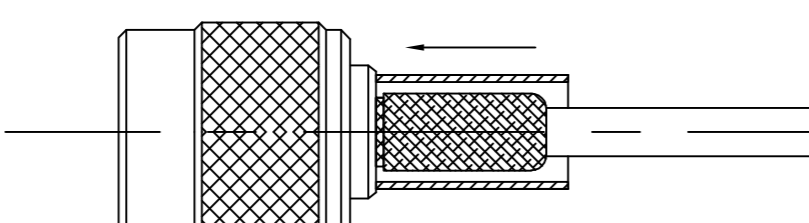


RECOMMENDED CRIMP SLEEVE A/F HEX



STEP 5
1. SLIDE CRIMP FERRULE ALONG THE CABLE UNTIL IT BUTTS AGAINST THE BODY HOUSING.
2. CRIMP USING TOOL AS NOTED ON PAGE 1.
3. CRIMP DIMENSION AS SHOWN.

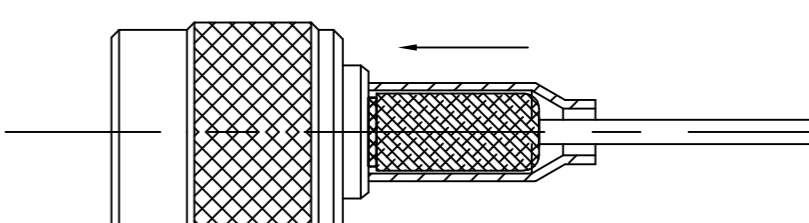

RECOMMENDED CRIMP SLEEVE A/F HEX



THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN	RITA ZUO	11 Mar 09
CHK	ANSON MA	11 Mar 09
APVD	BOB ZHAO	11 Mar 09

NAME: ANSON MA

PRODUCT SPEC: 108-112000

APPLICATION SPEC: SEE SHEET 2

WEIGHT: -

CUSTOMER DRAWING

Tyco Electronics Corporation
Kunshan, Jiangsu, PRC 215312

TNC STRAIGHT PLUG HEX CRIMP
50 OHM

SIZE: A2 CAGE CODE: 00779 DRAWING NO: C=1814801 RESTRICTED TO: -

SCALE: NTS SHEET 2 OF 2 REV B



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.