

Square Body – Accessories

Fuse Bases (Blocks)

DIN 43 653 Fuse Bases

For the Typower ZILOX fuses according to DIN 43 653, the following fuse bases are available:

| Part Number | Max. Voltage | Rated Current | Center Distance |
|-------------|--------------|---------------|-----------------|
| 170H3003 | 1000V | 630A | 80mm |
| 170H3004 | 1000V | 1250A | 80mm |
| 170H3005 | 1400V | 630A | 110mm |
| 170H3006 | 1400V | 1250A | 110mm |

The fuse bases rated 1250A can also be used for the fuses with higher rated current if the maximum load current is derated according to the table below:

| Fuse Rating | Max. Load Current In Fuse Base |
|-------------|--------------------------------|
| 1400A | 1325A |
| 1500A | 1400A |
| 1600A | 1500A |
| 1800A | 1650A |
| 2000A | 1800A |

| Fixed Center Base Style | Max. Voltage | Max. Fuse Current Rating | Fuse Size |
|-------------------------|--------------|--------------------------|-----------|
| 170H1007 | 1000V | 400A | 00, 000 |
| 170H1013 | 660V | 200A | 0000,000 |

U.L. Recognized to U.L. 512.

Universal Fuse Bases



For the Typower ZILOX fuses according to DIN 43 653, French style and North American style, the following fuse bases are available:

| Modular Base Style | Max. Voltage | Max. Fuse Current Rating | BIF Document |
|--------------------|--------------|--------------------------|--------------|
| 1BS101 | 600V | 100A | 1206 |
| 1BS102 | 600V | 400A | 1207 |
| 1BS103 | 600V | 400A | 1208 |
| 1BS104 | 600V | 600A | 1209 |
| BH-0xxx | 700V | 100A | 1200 |
| BH-1xxx | 2500V | 400A | 1201 |
| BH-2xxx | 5000V | 400A | 1202 |
| BH-3xxx | 1250V | 700A | 1203 |

Modular fuse bases are U.L. Recognized to U.L. 512 and meet the spacing requirements of U.L. 347. Contact Bussmann sales representative for more complete ordering information.

DIN 43 620 Fuse Bases

For fuse bases used with Typower ZILOX fuses according to DIN 43 620, please contact your local Bussmann sales representative.

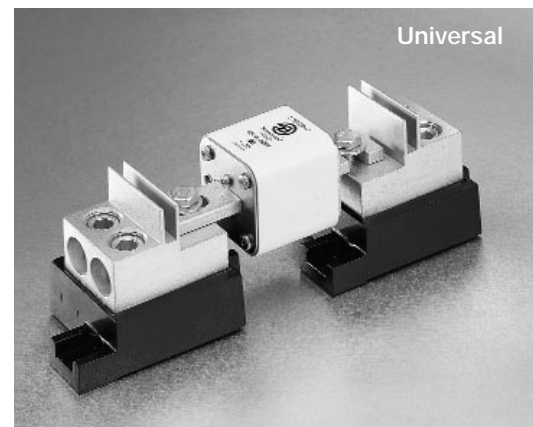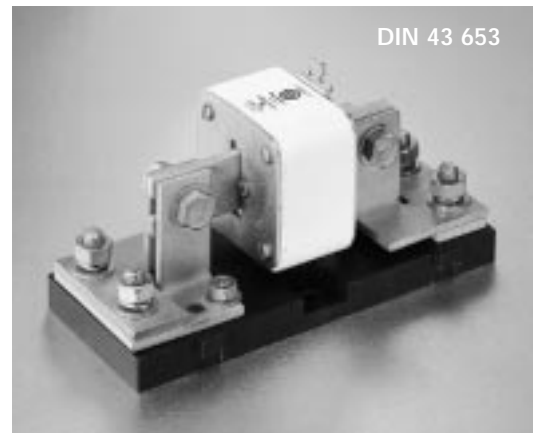

The only controlled copy of this BIF document is the electronic read-only version located on the Bussmann Network Drive. All other copies of this document are by definition uncontrolled. This bulletin is intended to clearly present comprehensive product data and provide technical information that will help the end user with design applications. Bussmann reserves the right, without notice, to change design or construction of any products and to discontinue or limit distribution of any products. Bussmann also reserves the right to change or update, without notice, any technical information contained in this bulletin. Once a product has been selected, it should be tested by the user in all possible applications.



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.