



Micro Commercial Components

Micro Commercial Components  
20736 Marilla Street Chatsworth  
CA 91311  
Phone: (818) 701-4933  
Fax: (818) 701-4939

**1.5KE6.8(C)(A)  
THRU  
1.5KE550(C)(A)**

## Features

- Economical Series and Quick Response
- Available in Both Unidirectional and Bidirectional Construction
- **1500Watts Peak Power Dissipation**
- Excellent Clamping Capability
- UL Recognized File#E331408
- Lead Free Finish/RoHS Compliant(Note 1) ("P" Suffix designates RoHS Compliant. See ordering information)
- Case Material: Molded Plastic. UL Flammability Classification Rating 94V-0 and MSL Rating 1

## Maximum Ratings

Peak Pulse Power Dissipation at 25°C:1500Watts

Steady State Power Dissipation:5.0Watts at  $T_L=+75^{\circ}\text{C}$

$t_{\text{clamping}}$ (0 Volts to  $V_{\text{BR}}$ ) Min):

Unidirectional $<1\times10^{-12}$  Seconds; Bidirectional $<5\times10^{-9}$  Seconds

Operating and Storage Temperature:  $-55^{\circ}\text{C}$  to  $+150^{\circ}\text{C}$

Forward Surge Rating 200 Amps, **8.3ms single half sine-wave**

Notes:1.High Temperature Solder Exemption Applied, see EU Directive Annex 7.

## APPLICATION

This Series has a peak pulse power rating of 1500 watts for One millisecond. It can protect intergrated circuit, hybrids,CMOS, MOS,and other voltage sensitive components in a board range of applications such as telecommunications,power supplies,computer, automotive,and industrial equipment.

**NOTES:**Forward Voltage ( $V_f$ )@100 amps peak,8.3 msec sine wave equal to 3.5 volts max. (unidirectional only).  
For Bidirectional type having  $V_{\text{WM}}$  of **10 Volts and under**, The ID leakage current is doubled. For bi-directional part number use **C or CA Suffix for types 1.5KE6.8 thru types 1.5KE550 (e.g. 1.5KE6.8C ,1.5KE550CA)**


### Marking:

Unidirectional - Type Number and Cathode Band

Bidirectional - Type Number Only

**1500 Watt  
Transient Voltage  
Suppressors  
6.8V to 550 Volts**

## DO-201AE

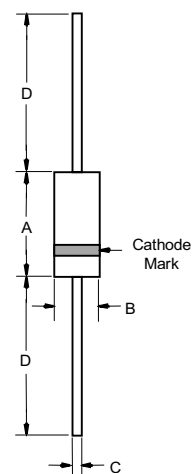

| DIMENSIONS |        |      |       |      |      |
|------------|--------|------|-------|------|------|
| DIM        | INCHES |      | MM    |      | NOTE |
|            | MIN    | MAX  | MIN   | MAX  |      |
| A          | ---    | .370 | ---   | 9.50 |      |
| B          | ---    | .250 | ---   | 6.40 |      |
| C          | .038   | .042 | .96   | 1.06 |      |
| D          | 1.000  | ---  | 25.40 | ---  |      |

## RATING AND CHARACTERISTIC CURVES

### 1.5KE SERIES

**M.C.C.**

Micro Commercial Components

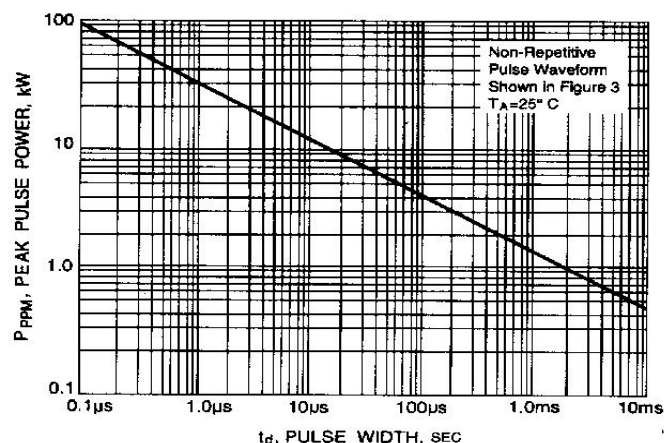


Fig. 1-PEAK PULSE POWER RATING CURVE

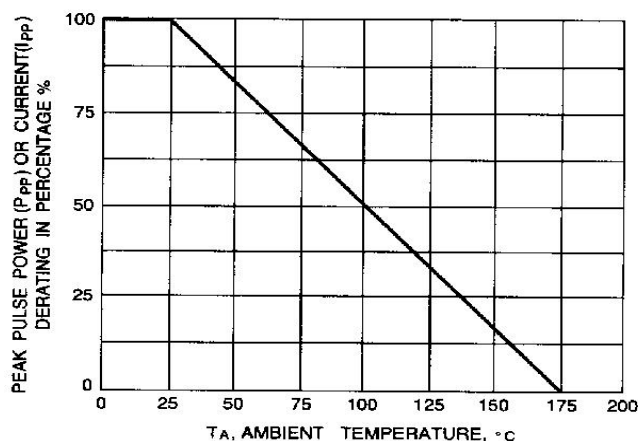


Fig. 2-PULSE DERATING CURVE

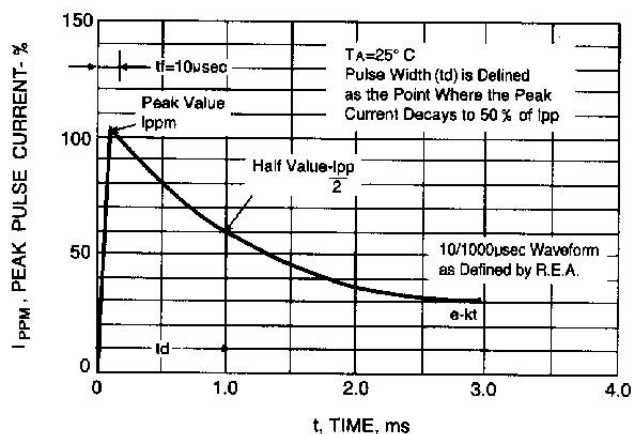


Fig. 3-PULSE WAVEFORM

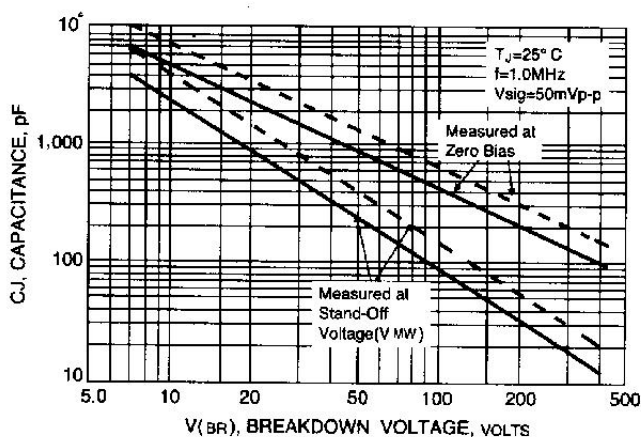


Fig. 4-TYPICAL JUNCTION CAPACITANCE

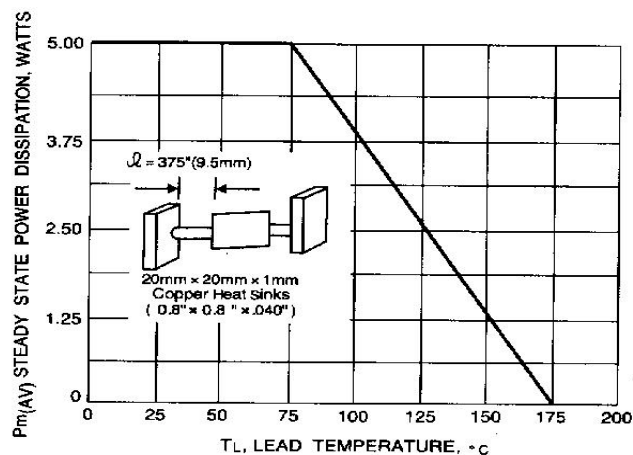


Fig. 5-STEADY STATE POWER DERATING CURVE

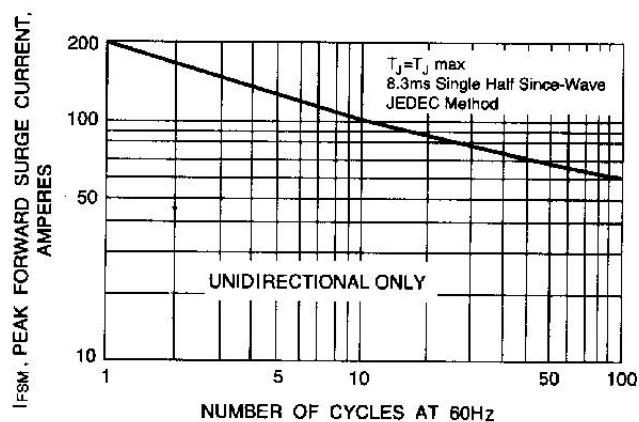


Fig. 6-MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT UNIDIRECTIONAL

# 1.5KE6.8(C)(A)~1.5KE550(C)(A)

Micro Commercial Components

| MCC<br>PART NUMBER |            | REVERSE<br>STAND- OFF<br>VOLTAGE<br>V <sub>RWM</sub> (V) | BREAKDOWN<br>VOLTAGE<br>V <sub>BR</sub> (V)<br>MIN.@I <sub>T</sub> | BREAKDOWN<br>VOLTAGE<br>V <sub>BR</sub> (V)<br>MAX.@I <sub>T</sub> | TEST<br>CURRENT I <sub>T</sub><br>(mA) | MAXIMUM<br>CLAMPING<br>VOLTAGE<br>@I <sub>pp</sub> V <sub>c</sub> (V) | PEAK PULSE<br>CURRENT<br>I <sub>pp</sub> (A) | REVERSE<br>LEAKAGE @<br>V <sub>RWM</sub> I <sub>r</sub> (μA) |
|--------------------|------------|----------------------------------------------------------|--------------------------------------------------------------------|--------------------------------------------------------------------|----------------------------------------|-----------------------------------------------------------------------|----------------------------------------------|--------------------------------------------------------------|
| UNI- POLAR         | BI-POLAR   |                                                          |                                                                    |                                                                    |                                        |                                                                       |                                              |                                                              |
| 1.5KE6.8A          | 1.5KE6.8CA | 5.80                                                     | 6.45                                                               | 7.14                                                               | 10                                     | 10.5                                                                  | 144.8                                        | 1000                                                         |
| 1.5KE7.5A          | 1.5KE7.5CA | 6.40                                                     | 7.13                                                               | 7.88                                                               | 10                                     | 11.3                                                                  | 134.5                                        | 500                                                          |
| 1.5KE8.2A          | 1.5KE8.2CA | 7.02                                                     | 7.79                                                               | 8.61                                                               | 10                                     | 12.1                                                                  | 125.6                                        | 200                                                          |
| 1.5KE9.1A          | 1.5KE9.1CA | 7.78                                                     | 8.65                                                               | 9.50                                                               | 1                                      | 13.4                                                                  | 113.4                                        | 50                                                           |
| 1.5KE10A           | 1.5KE10CA  | 8.55                                                     | 9.50                                                               | 10.50                                                              | 1                                      | 14.5                                                                  | 104.8                                        | 10                                                           |
| 1.5KE11A           | 1.5KE11CA  | 9.40                                                     | 10.50                                                              | 11.60                                                              | 1                                      | 15.6                                                                  | 97.4                                         | 5                                                            |
| 1.5KE12A           | 1.5KE12CA  | 10.20                                                    | 11.40                                                              | 12.60                                                              | 1                                      | 16.7                                                                  | 91.0                                         | 5                                                            |
| 1.5KE13A           | 1.5KE13CA  | 11.10                                                    | 12.40                                                              | 13.70                                                              | 1                                      | 18.2                                                                  | 83.5                                         | 5                                                            |
| 1.5KE15A           | 1.5KE15CA  | 12.80                                                    | 14.30                                                              | 15.80                                                              | 1                                      | 21.2                                                                  | 71.7                                         | 5                                                            |
| 1.5KE16A           | 1.5KE16CA  | 13.60                                                    | 15.20                                                              | 16.80                                                              | 1                                      | 22.5                                                                  | 67.6                                         | 5                                                            |
| 1.5KE18A           | 1.5KE18CA  | 15.30                                                    | 17.10                                                              | 18.90                                                              | 1                                      | 25.2                                                                  | 60.3                                         | 5                                                            |
| 1.5KE20A           | 1.5KE20CA  | 17.10                                                    | 19.00                                                              | 21.00                                                              | 1                                      | 27.7                                                                  | 54.9                                         | 5                                                            |
| 1.5KE22A           | 1.5KE22CA  | 18.80                                                    | 20.90                                                              | 23.10                                                              | 1                                      | 30.6                                                                  | 49.7                                         | 5                                                            |
| 1.5KE24A           | 1.5KE24CA  | 20.50                                                    | 22.80                                                              | 25.20                                                              | 1                                      | 33.2                                                                  | 45.8                                         | 5                                                            |
| 1.5KE27A           | 1.5KE27CA  | 23.10                                                    | 25.70                                                              | 28.40                                                              | 1                                      | 37.5                                                                  | 40.5                                         | 5                                                            |
| 1.5KE30A           | 1.5KE30CA  | 25.60                                                    | 28.50                                                              | 31.50                                                              | 1                                      | 41.4                                                                  | 36.7                                         | 5                                                            |
| 1.5KE33A           | 1.5KE33CA  | 28.20                                                    | 31.40                                                              | 34.70                                                              | 1                                      | 45.7                                                                  | 33.3                                         | 5                                                            |
| 1.5KE36A           | 1.5KE36CA  | 30.80                                                    | 34.20                                                              | 37.80                                                              | 1                                      | 49.9                                                                  | 30.5                                         | 5                                                            |
| 1.5KE39A           | 1.5KE39CA  | 33.30                                                    | 37.10                                                              | 41.00                                                              | 1                                      | 53.9                                                                  | 28.2                                         | 5                                                            |
| 1.5KE43A           | 1.5KE43CA  | 36.80                                                    | 40.90                                                              | 45.20                                                              | 1                                      | 59.3                                                                  | 25.6                                         | 5                                                            |
| 1.5KE47A           | 1.5KE47CA  | 40.20                                                    | 44.70                                                              | 49.40                                                              | 1                                      | 64.8                                                                  | 23.5                                         | 5                                                            |
| 1.5KE51A           | 1.5KE51CA  | 43.60                                                    | 48.50                                                              | 53.60                                                              | 1                                      | 70.1                                                                  | 21.7                                         | 5                                                            |
| 1.5KE56A           | 1.5KE56CA  | 47.80                                                    | 53.20                                                              | 58.80                                                              | 1                                      | 77.0                                                                  | 19.7                                         | 5                                                            |
| 1.5KE62A           | 1.5KE62CA  | 53.00                                                    | 58.90                                                              | 65.10                                                              | 1                                      | 85.0                                                                  | 17.9                                         | 5                                                            |
| 1.5KE68A           | 1.5KE68CA  | 58.10                                                    | 64.60                                                              | 71.40                                                              | 1                                      | 92.0                                                                  | 16.5                                         | 5                                                            |
| 1.5KE75A           | 1.5KE75CA  | 64.10                                                    | 71.30                                                              | 78.80                                                              | 1                                      | 103.0                                                                 | 14.8                                         | 5                                                            |
| 1.5KE82A           | 1.5KE82CA  | 70.10                                                    | 77.90                                                              | 86.10                                                              | 1                                      | 113.0                                                                 | 13.5                                         | 5                                                            |
| 1.5KE91A           | 1.5KE91CA  | 77.80                                                    | 86.50                                                              | 95.50                                                              | 1                                      | 125.0                                                                 | 12.2                                         | 5                                                            |
| 1.5KE100A          | 1.5KE100CA | 85.50                                                    | 95.00                                                              | 105.00                                                             | 1                                      | 137.0                                                                 | 11.1                                         | 5                                                            |
| 1.5KE110A          | 1.5KE110CA | 94.00                                                    | 105.00                                                             | 116.00                                                             | 1                                      | 152.0                                                                 | 10.0                                         | 5                                                            |
| 1.5KE120A          | 1.5KE120CA | 102.00                                                   | 114.00                                                             | 126.00                                                             | 1                                      | 165.0                                                                 | 9.2                                          | 5                                                            |
| 1.5KE130A          | 1.5KE130CA | 111.00                                                   | 124.00                                                             | 137.00                                                             | 1                                      | 179.0                                                                 | 8.5                                          | 5                                                            |
| 1.5KE150A          | 1.5KE150CA | 128.00                                                   | 143.00                                                             | 158.00                                                             | 1                                      | 207.0                                                                 | 7.3                                          | 5                                                            |
| 1.5KE160A          | 1.5KE160CA | 136.00                                                   | 152.00                                                             | 168.00                                                             | 1                                      | 219.0                                                                 | 6.9                                          | 5                                                            |
| 1.5KE170A          | 1.5KE170CA | 145.00                                                   | 162.00                                                             | 179.00                                                             | 1                                      | 234.0                                                                 | 6.5                                          | 5                                                            |
| 1.5KE180A          | 1.5KE180CA | 154.00                                                   | 171.00                                                             | 189.00                                                             | 1                                      | 246.0                                                                 | 6.2                                          | 5                                                            |
| 1.5KE200A          | 1.5KE200CA | 171.00                                                   | 190.00                                                             | 210.00                                                             | 1                                      | 274.0                                                                 | 5.5                                          | 5                                                            |
| 1.5KE220A          | 1.5KE220CA | 185.00                                                   | 209.00                                                             | 231.00                                                             | 1                                      | 328.0                                                                 | 4.6                                          | 5                                                            |
| 1.5KE250A          | 1.5KE250CA | 214.00                                                   | 237.00                                                             | 263.00                                                             | 1                                      | 344.0                                                                 | 4.4                                          | 5                                                            |
| 1.5KE300A          | 1.5KE300CA | 256.00                                                   | 285.00                                                             | 315.00                                                             | 1                                      | 414.0                                                                 | 3.7                                          | 5                                                            |
| 1.5KE350A          | 1.5KE350CA | 300.00                                                   | 332.00                                                             | 368.00                                                             | 1                                      | 482.0                                                                 | 3.2                                          | 5                                                            |
| 1.5KE400A          | 1.5KE400CA | 342.00                                                   | 380.00                                                             | 420.00                                                             | 1                                      | 548.0                                                                 | 2.8                                          | 5                                                            |
| 1.5KE440A          | 1.5KE440CA | 376.00                                                   | 418.00                                                             | 462.00                                                             | 1                                      | 602.0                                                                 | 2.5                                          | 5                                                            |
| 1.5KE480A          | 1.5KE480CA | 408.00                                                   | 456.00                                                             | 504.00                                                             | 1                                      | 658.0                                                                 | 2.3                                          | 5                                                            |
| 1.5KE510A          | 1.5KE510CA | 434.00                                                   | 485.00                                                             | 535.00                                                             | 1                                      | 698.0                                                                 | 2.1                                          | 5                                                            |
| 1.5KE530A          | 1.5KE530CA | 450.00                                                   | 503.50                                                             | 556.50                                                             | 1                                      | 725.0                                                                 | 2.1                                          | 5                                                            |
| 1.5KE540A          | 1.5KE540CA | 459.00                                                   | 513.00                                                             | 567.00                                                             | 1                                      | 740.0                                                                 | 2.0                                          | 5                                                            |
| 1.5KE550A          | 1.5KE550CA | 467.00                                                   | 522.50                                                             | 577.50                                                             | 1                                      | 760.0                                                                 | 2.0                                          | 5                                                            |

For bidirectional type having V<sub>rw</sub> of 10 volts and less, the IR limit is double.

For parts without A , the VBR is ± 10%

Ordering Information

| Device           | Packing                      |
|------------------|------------------------------|
| (Part Number)-TP | Tape&Reel; 1.2Kpcs/Reel      |
| (Part Number)-AP | Ammo Packing;1.2Kpcs/AmmoBox |
| (Part Number)-BP | Bulk;500pcs/Box              |

\*\*\*IMPORTANT NOTICE\*\*\*

*Micro Commercial Components Corp.* reserves the right to make changes without further notice to any product herein to make corrections, modifications , enhancements , improvements , or other changes . *Micro Commercial Components Corp.* does not assume any liability arising out of the application or use of any product described herein; neither does it convey any license under its patent rights ,nor the rights of others . The user of products in such applications shall assume all risks of such use and will agree to hold *Micro Commercial Components Corp.* and all the companies whose products are represented on our website, harmless against all damages.

\*\*\*APPLICATIONS DISCLAIMER\*\*\*

Products offer by *Micro Commercial Components Corp.* are not intended for use in Medical, Aerospace or Military Applications.



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



#### Как с нами связаться

**Телефон:** 8 (812) 309 58 32 (многоканальный)

**Факс:** 8 (812) 320-02-42

**Электронная почта:** [org@eplast1.ru](mailto:org@eplast1.ru)

**Адрес:** 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.