

DO NOT
SCALE FROM
THIS PRINT

TABLE 1		
LEAD STYLE	"A"	CONTACT
-01	0.090 [2.29]	C-79-01-X
-01-S-RA	N/A	C-79-53-X
-01-D-RA	N/A	C-79-53-X
		C-79-12-X
-01-T-RA	N/A	C-79-53-X
		C-79-12-X
		C-79-12-X
*-01-Q-RA	N/A	ASP-71394-01-X
		ASP-71394-02-X
		ASP-71394-03-X
		ASP-71394-04-X
-02	0.600 [15.24]	C-79-02-X
-03	0.208 [5.28]	C-79-53-X

* NOT RELEASED

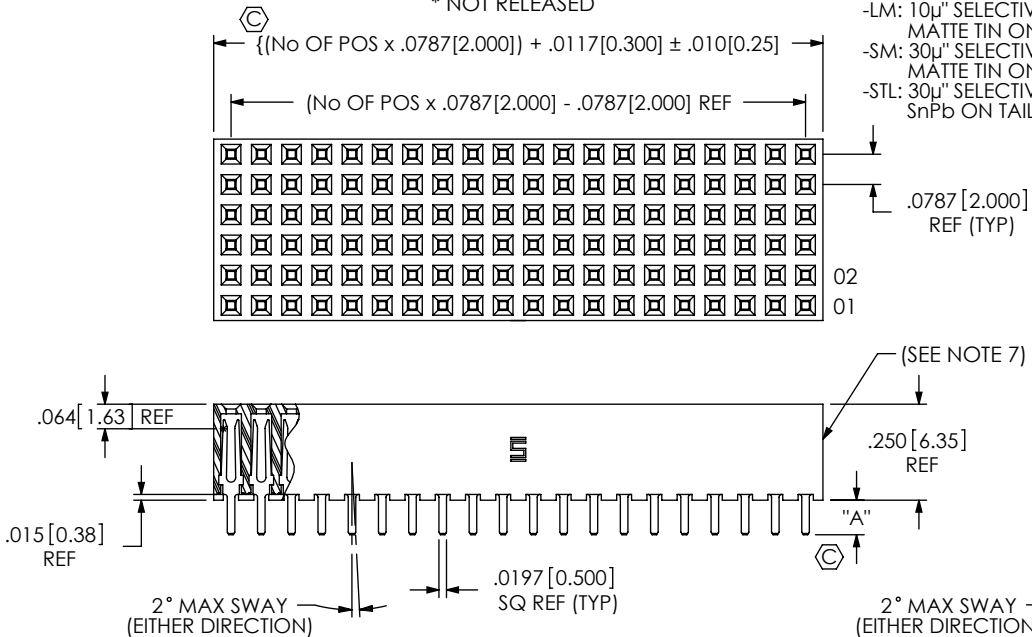


FIG 1
SQT-120-0T-XX-6 SHOWN

SQT-1XX-XX-XXX-X-XXX-XXX

No OF POSITIONS
-02 THRU -50
(PER ROW)
-01 (SEE NOTE 3)
LEAD STYLE
(SEE TABLE 1)

PLATING SPECIFICATION

-F: 3μ" SELECTIVE GOLD IN CONTACT AREA,
MATTE TIN ON TAIL.
-L: 10μ" SELECTIVE GOLD IN CONTACT AREA,
MATTE TIN ON TAIL.
-G: 20μ" SELECTIVE GOLD IN CONTACT AREA,
3μ" SELECTIVE GOLD ON TAIL.
-S: 30μ" SELECTIVE GOLD IN CONTACT AREA,
MATTE TIN ON TAIL.
-H: 50μ" SELECTIVE GOLD IN CONTACT AREA,
3μ" SELECTIVE GOLD ON TAIL.
-FM: 3μ" SELECTIVE GOLD IN CONTACT AREA,
MATTE TIN ON TAIL.
-LM: 10μ" SELECTIVE GOLD IN CONTACT AREA,
MATTE TIN ON TAIL.
-SM: 30μ" SELECTIVE GOLD IN CONTACT AREA,
MATTE TIN ON TAIL.
-STL: 30μ" SELECTIVE GOLD IN CONTACT AREA,
SnPb ON TAIL.

POLARIZATION OPTION
-XXX: INDICATES POSITION
(SEE NOTE 10)

OPTION


-RA: RIGHT ANGLE
(-01 LEAD STYLE, ROWS -S, -D, -T, *-Q ONLY)
(NOT AVAILABLE ON 5 & 6 ROWS)
(SINGLE, DOUBLE, TRIPLE ROW: SEE FIG 2, SHT 2)
*QUAD ROW: SEE FIG 5, SHT 3)
*-SD1: SOLDER DONUT (SEE FIG 3, SHT 2)
(AVAILABLE ON -S, -D, -T, AND *-Q ONLY)
**-MW: METAL WASHER (SHT 2, SEE FIG 4)
(AVAILABLE ON LEAD STYLES -01 & -03 ONLY)
(5 POS MIN, 30 POS MAX, .300 MAX TAIL)

ROW SPECIFICATION

-S: SINGLE (USE SQT-61-S)
-D: DOUBLE (USE SQT-62-D)
-T: TRIPLE (USE SQT-62-T)
-Q: QUAD (USE SQT-62-Q)
-5: FIVE ROW (USE SQT-62-5)
-6: SIX ROW (USE SQT-62-6)

* = NOT RELEASED FOR PRODUCTION
** = MW OPTION, DO NOT DESIGN IN, SAMTEC WILL
ONLY SUPPORT EXISTING BUSINESS 02/06/2002

TABLE 3		
ROW SPEC.	BODY	"B"
-S	SQT-61-S	0.0787 [2.000]
-D	SQT-62-D	0.1575 [4.000]
-T	SQT-62-T	0.2362 [6.000]
-Q	SQT-62-Q	0.3150 [8.000]
-5	SQT-62-5	0.3937 [10.000]
-6	SQT-62-6	0.4724 [12.000]



(POSITON PATTERN SINGLE ROW ONLY)

UNLESS OTHERWISE SPECIFIED,
DIMENSIONS ARE IN INCHES.
TOLERANCES ARE:
DECIMALS ANGLES
.XX: ±.01 [.3] 2°
.XXX: ±.005 [.13]
.XXXX: ±.0020 [.051]

PROPRIETARY NOTE
THIS DOCUMENT CONTAINS INFORMATION
CONFIDENTIAL AND PROPRIETARY TO
SAMTEC, INC. AND SHALL NOT BE REPRODUCED
OR TRANSFERRED TO OTHER DOCUMENTS OR
DISCLOSED TO OTHERS OR USED FOR ANY
PURPOSE OTHER THAN THAT WHICH IT WAS
OBTAINED WITHOUT THE EXPRESSED WRITTEN
CONSENT OF SAMTEC, INC.



520 PARK EAST BLVD, NEW ALBANY, IN 47150
PHONE: 812-944-6733 FAX: 812-948-5047
e-Mail: info@SAMTEC.com code 55322

MATERIAL: DO NOT SCALE DRAWING SHEET SCALE: 2:1
INSULATOR: LCP, UL 94 VO, COLOR: BLACK
CONTACT: PHOS BRONZE

MAX BOW ALLOWED: .004[.10] IN/IN


DESCRIPTION:
2MM SOCKET STRIP ASSEMBLY

DWG. NO.
SQT-1XX-XX-XXX-X-XXX-XXX


BY: BRATCHER 07/24/1995 SHEET 1 OF 4

- NOTES:
1. (Critical Dimension Symbol) REPRESENTS A CRITICAL DIMENSION.
 2. MINIMUM CONTACT RETENTION: .5 LB
 3. -01 POSITION OFFERED FOR SINGLE ROW & ONLY FOR -S, -D, -T & -Q ROWS RIGHT ANGLE ONLY.
 4. -01, -02, & -03 & ONLY FOR -S, -D, -T & -Q ROWS POSITIONS TO BE LAYER PACKAGED.
 5. STOCK 62 POSITION FOR -D AND 61 POSITION FOR -S, -01 LEAD STYLE ONLY. TO BE CUT TO POSITION FOR CUSTOMER.
 6. MAXIMUM BURR: .005[0.13]
 7. ENDWALL AFTER CUTTING: .033[0.84]±.004[0.10], VOIDS MAY BE PRESENT. CONTACTS MUST NOT BE VISIBLE THROUGH THE ENDWALL.
 8. MAXIMUM CUT FLASH: .020[0.50]
 9. MAXIMUM HEIGHT VARIATION: .005[0.13]
 10. INSERT PK-07-N INTO SPECIFIED POSITION AND BREAK OFF TAB.


REVISION BW





IN PROCESS 1
(LEAD STYLE -01-S,D,T-RA)



IN PROCESS 2
(LEAD STYLE -01-D,T-RA)

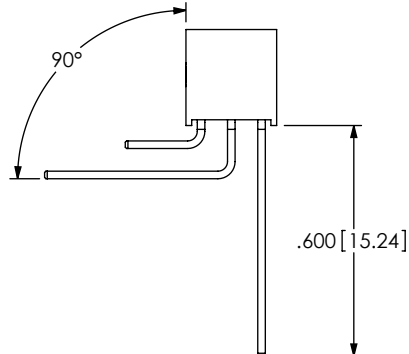

IN PROCESS 3
(LEAD STYLE -01-T-RA)



WASHER REEL ASSEMBLY
ORIENTATION VIEW

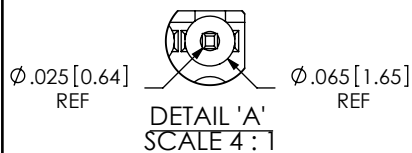
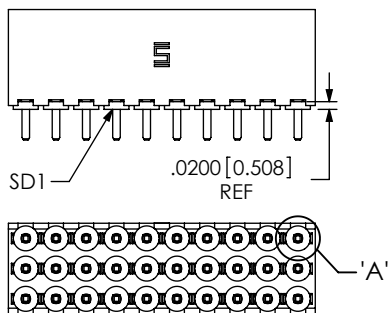


FIG 3
*SD1: SOLDER DONUT
(ONE PER POSITION)
(ROW STYLE -S,-D,-T & -Q ONLY)
*NOT ENGINEERING APPROVED

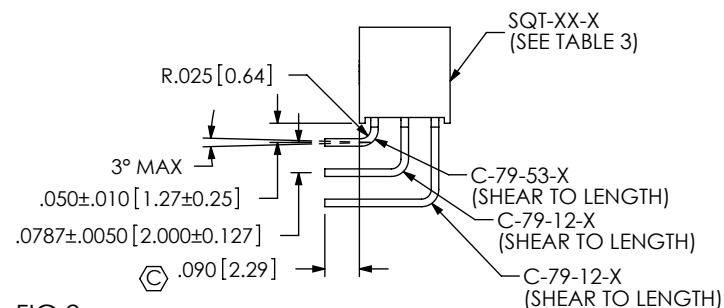
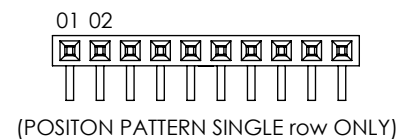




FIG 2
-RA: RIGHT ANGLE
(LEAD STYLE -01-D,T)





FIG 4
**-MW: METAL WASHER
(ONE PER POSITION)
(AVAILABLE ON LEADSTYLES -01 & -03 ONLY
(5 POS MIN, 30 POS MAX)
**-MW OPION, DO NOT DESIGN IN. SAMTEC WILL
ONLY SUPPORT EXISTING BUSINESS 2/06/02.

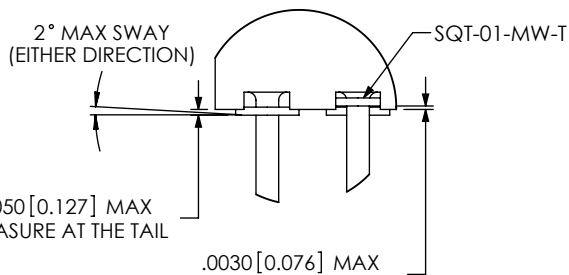


DETAIL 'B'
SCALE 6:1


F:\DWG\MISC\MKTG\SQT-1XX-XX-XXX-X-XXX-XXX-MKT.SLDDRW

PROPRIETARY NOTE THIS DOCUMENT CONTAINS INFORMATION CONFIDENTIAL AND PROPRIETARY TO SAMTEC, INC. AND SHALL NOT BE REPRODUCED OR TRANSFERRED TO OTHER DOCUMENTS OR DISCLOSED TO OTHERS OR USED FOR ANY PURPOSE OTHER THAN THAT WHICH IT WAS OBTAINED WITHOUT THE EXPRESSED WRITTEN CONSENT OF SAMTEC, INC.		samtec 520 PARK EAST BLVD, NEW ALBANY, IN 47150 PHONE: 812-944-6733 FAX: 812-948-5047 e-Mail: info@SAMTEC.com code 55322	
DO NOT SCALE DRAWING		DESCRIPTION: 2MM SOCKET STRIP ASSEMBLY	
SHEET SCALE: 2:1		DWG. NO. SQT-1XX-XX-XXX-X-XXX-XXX	
BY: BRATCHER 07/24/1995		SHEET 2 OF 4	


REVISION BW



IN PROCESS 1
-RA: RIGHT ANGLE
(-01 LEAD STYLE -Q ROW ONLY)

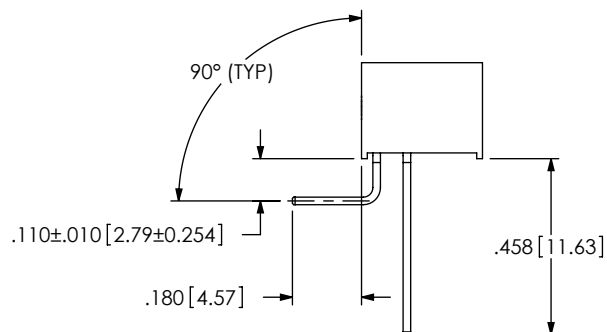

IN PROCESS 2
-RA: RIGHT ANGLE
(-01 LEAD STYLE -Q ROW ONLY)

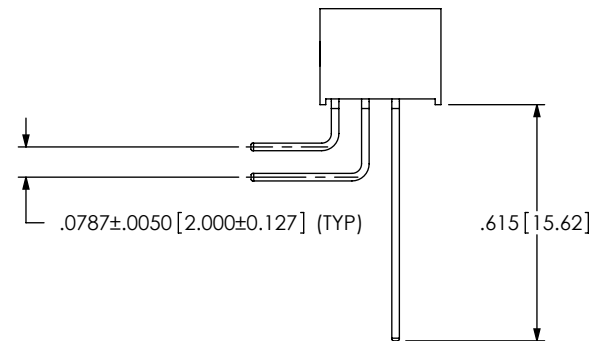

IN PROCESS 3
-RA: RIGHT ANGLE
(-01 LEAD STYLE -Q ROW ONLY)



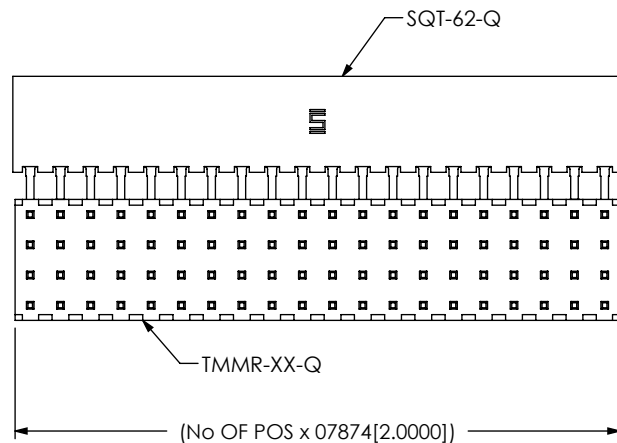


FIG 5
-RA: RIGHT ANGLE
(-01 LEAD STYLE -Q ROW ONLY)

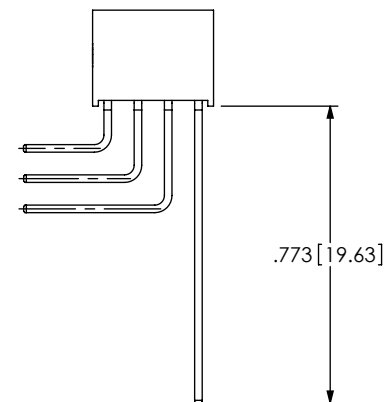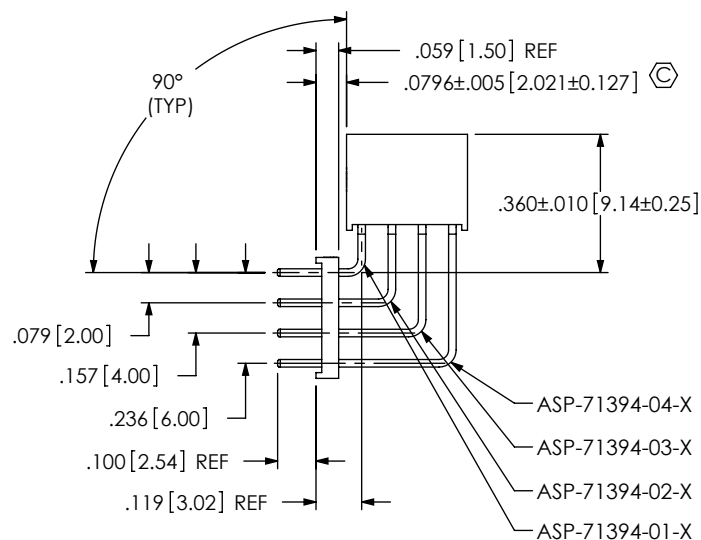

IN PROCESS 4
-RA: RIGHT ANGLE
(-01 LEAD STYLE -Q ROW ONLY)

PROPRIETARY NOTE

THIS DOCUMENT CONTAINS INFORMATION
CONFIDENTIAL AND PROPRIETARY TO
SAMTEC, INC. AND SHALL NOT BE REPRODUCED
OR TRANSFERRED TO OTHER DOCUMENTS OR
DISCLOSED TO OTHERS OR USED FOR ANY
PURPOSE OTHER THAN THAT WHICH IT WAS
OBTAINED WITHOUT THE EXPRESSED WRITTEN
CONSENT OF SAMTEC, INC.

DO NOT SCALE DRAWING

SHEET SCALE: 2:1

samtec

520 PARK EAST BLVD, NEW ALBANY, IN 47150
PHONE: 812-944-6733 FAX: 812-948-5047
e-Mail: info@SAMTEC.com code 55322

DESCRIPTION:
2MM SOCKET STRIP ASSEMBLY


DWG. NO.
SQT-1XX-XX-XXX-X-XXX-XXX

BY: BRATCHER 07/24/1995 SHEET 3 OF 4


PACKAGING VIEWS




SQT-1XX-01-XX-D
(SEE TABLE 2)





SQT-1XX-02-XX-D
(LOCATE PLUG AS SHOWN)
(SEE TABLE 2)



SQT-1XX-01-XX-D-RA SHOWN
(LOCATE PLUG AS SHOWN)
(SEE TABLE 2)



SQT-1XX-05-XX-X
(LOCATE PLUG AS SHOWN)
(SEE TABLE 2)



SQT-1XX-03-XX-6 SHOWN
(SEE TABLE 2)




TABLE 2			
ROW SPEC.	No. OF POS	PKG TUBE	TUBE PLUG
-03-S	04-50	PT-1-24-06-17	TP-24
-02-S	04-50	PT-1-24-10-03	TP-03
-01-S-RA	04-50	PT-1-24-01-43	TP-24
-01-D	04-50	PT-1-24-02-17	TP-09
-02-D	04-50	PT-1-24-01-34	TP-07
-03-D	04-50	PT-1-24-01-22	TP-03
-01-D-RA	04-50	PT-1-24-01-45	TP-03
-01-T	04-50	PT-1-24-05-09	TP-07
-02-T	04-50	PT-1-24-01-102	TP-07
-03-T	04-50	PT-1-24-08-15	TP-07
-01-Q	04-50	PT-1-24-15-29	TP-07
-02-Q	04-50	PT-1-24-02-51	TP-13
-03-Q	04-50	PT-1-24-16-29	TP-07
-01-T-RA	04-50	PT-1-24-06-40	TP-07
-01-S	04-50	PT-1-24-05-15	TP-24
-03-5	15-50	PT-1-24-01-08	TP-13
-02-5	15-50	PT-1-24-01-56	TP-31
-01-6	ALL	PT-1-24-01-52	TP-07
-02-6	ALL	PT-1-25-03-28	TP-13
-03-6	ALL	PT-1-24-01-08	TP-13
-01-5	15-50	PT-1-24-09F-109	TP-07
-01-5, -02-5, -03-5	-02 THRU -14	LAYER PACKAGING	
-S, -D, -T, -Q	-02 & -03	LAYER PACKAGING	

PROPRIETARY NOTE

THIS DOCUMENT CONTAINS INFORMATION
CONFIDENTIAL AND PROPRIETARY TO
SAMTEC, INC. AND SHALL NOT BE REPRODUCED
OR TRANSFERRED TO OTHER DOCUMENTS OR
DISCLOSED TO OTHERS OR USED FOR ANY
PURPOSE OTHER THAN THAT WHICH IT WAS
OBTAINED WITHOUT THE EXPRESSED WRITTEN
CONSENT OF SAMTEC, INC.

DO NOT SCALE DRAWING

SHEET SCALE: 1:1



520 PARK EAST BLVD, NEW ALBANY, IN 47150
PHONE: 812-944-6733 FAX: 812-948-5047
e-Mail info@SAMTEC.com code 55322

DESCRIPTION:	2MM SOCKET STRIP ASSEMBLY
DWG. NO.	SQT-1XX-XX-XXX-X-XXX-XXX
BY: BRATCHER 07/24/1995	SHEET 4 OF 4



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.