

FOR REFERENCE ONLY

B NX301HB1B-XX

SPECIFICATIONS:

AC RATING: 10 AMPS @115VAC (RESISTIVE LOAD)
 5 AMPS @115VAC (INDUCTIVE LOAD)
 3 AMPS @115VAC (LAMP LOAD)

DC RATING: 10 AMPS @28VDC (RESISTIVE LOAD)
 5 AMPS @28VDC (INDUCTIVE LOAD)
 3 AMPS @28VDC (LAMP LOAD)

TYPE 7 CONTACT ARRANGEMENTS:

1/2 AMPERAGE LOADS SHOWN ABOVE


MECHANICAL LIFE: 500,000 CYCLES
 ACTION: MOMENTARY SNAP OR PUSH PULL

OPERATING FORCE:
 SERIES 20 & 30: 3 TO 5 POUNDS MOMENTARY
 1/2 TO 2 POUNDS PUSH-PULL

SERIES 22 & 32: 2 TO 3 POUNDS MOMENTARY

WEIGHT: .050 POUNDS MAXIMUM
 CASE: ALUMINUM ALLOY 2011-T3,
 CLEAR ANODIZED IAW MIL-A-8625

PLUNGER: GLASS FILLED NYLON
 BODY: DIALLYL PHTHALATE IAW MIL-M-14
 TERMINALS: THREADED #2-56 NC-2B

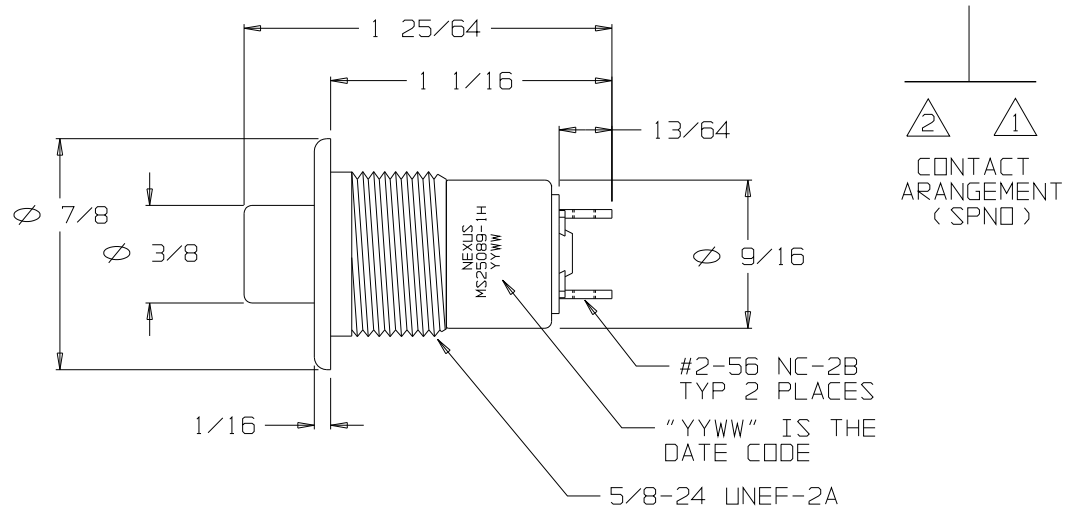

DESCRIPTION

DUSTPROOF "SERIES 300" MOMENTARY SWITCH
 CONTACTS SPNO - SINGLE POLE NORMALLY OPEN
 ADAPTER TYPE "H", COLOR BLACK
 BUTTON #1, COLOR BLACK


ORDERING INFORMATION:

NX301HB1B-00 SWITCH ONLY
 NX301HB1B-60 SWITCH, MOUNTING HARDWARE
 NX301HB1B-61 SWITCH, MOUNTING HARDWARE, TERNIMAL HARDWARE
 NX301HB1B-00EU SWITCH (ROHS) ONLY
 NX301HB1B-60EU SWITCH (ROHS), MOUNTING HARDWARE
 NX301HB1B-61EU SWITCH (ROHS), MOUNTING HARDWARE, TERNIMAL HARDWARE

THIS DOCUMENT CONTAINS PROPRIETARY INFORMATION OF NEXUS, INCORPORATED AND SUCH INFORMATION MAY NOT BE DISCLOSED TO OTHERS FOR ANY PURPOSE OR USED FOR ANY PURPOSE WITHOUT THE WRITTEN CONSENT OF NEXUS.




SW-200-23
 TERMINAL
 (2)



SW-200-34
 5/8-24 NUT
 (1)



SW-200-25
 #2 LOCKWASHER
 (2)



SW-200-35
 5/8 LOCKWASHER
 (1)



SW-200-72
 #2-56 SCREW
 (2)

TERMINAL
 HARDWARE

MOUNTING
 HARDWARE

OWN. BY	EWT	DATE	11/14/06	MATERIAL	N/A
CHECKED BY		DATE		FINISH	N/A
APPR. BY		DATE		WEIGHT	—
				SCALE	N/A
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ON				TITLE SWITCH SPNO MOMENTARY (MS25089-1H)	
.XX .XXX ANGLES — ±.003 ±.5°				DD NOT SCALE DWG. SHEET 1 OF 1	
				SIZE	DWG. NO.
				B	NX301HB1B-XX

LET.	REVISION	CN #	DATE	CHK.
------	----------	------	------	------



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.