

TETRA + cellular + WiFi diplexer 2501.17.0092

Description

Diplexer which allows combination and separation of signals in the 80 - 960 MHz and 1695 - 2700 MHz wireless bands.

To minimize band inter-reaction, the inputs are well isolated and have minimal insertion loss over their respective frequency bands. Attention to mechanical design ensures low passive intermodulation. The diplexer is designed using passive, proprietary techniques for low loss and high reliability.



Technical Data

Electrical Data

	Band 1	Band 2
Frequency (MHz)	0.08 - 0.96 GHz	1.695 - 2.7 GHz
Insertion loss (dB)	0.3 dB	0.5 dB
Return loss (dB)	20 dB	20 dB
Band 1		50 dB
Max. composite power	120 W	120 W
Peak envelope power	3000 W	3000 W
Intermodulation distortion	-155 dBc	-155 dBc
@ 2 x carrier power	43 dBm	43 dBm
Port Designation	J2	J1
Connector Type	N	N
Gender	jack (female)	jack (female)

Ports

Port designation	J3
Connector	N jack (female)
Impedance	50 Ω

Current rating:

DC path J2 to J3: 2 A max.

DC path J1 to J3: isolated

PIM -161dBc typ.

Mechanical Data

Width	106.7 mm
Height	31.7 mm
Depth	122.3 mm
Weight	0.55 kg

Environmental Data

Environmental conditions	indoor
Operation temperature	-35 °C to 70 °C
Storage temperature	-35 °C to 70 °C
Transport temperature	-35 °C to 70 °C
IP rating	IP64
2011/65/EU (RoHS - including 2015/863 and 2017/2102)	compliant
1907/2006/EC (REACH)	compliant

Material Data

Housing Material	Aluminium
------------------	-----------


TETRA + cellular + WiFi diplexer 2501.17.0092

Surface treatment passivated

Related Documents

Outline drawing DOU-00285225
3D-model (Step) DOC-0000369306

Additional Information

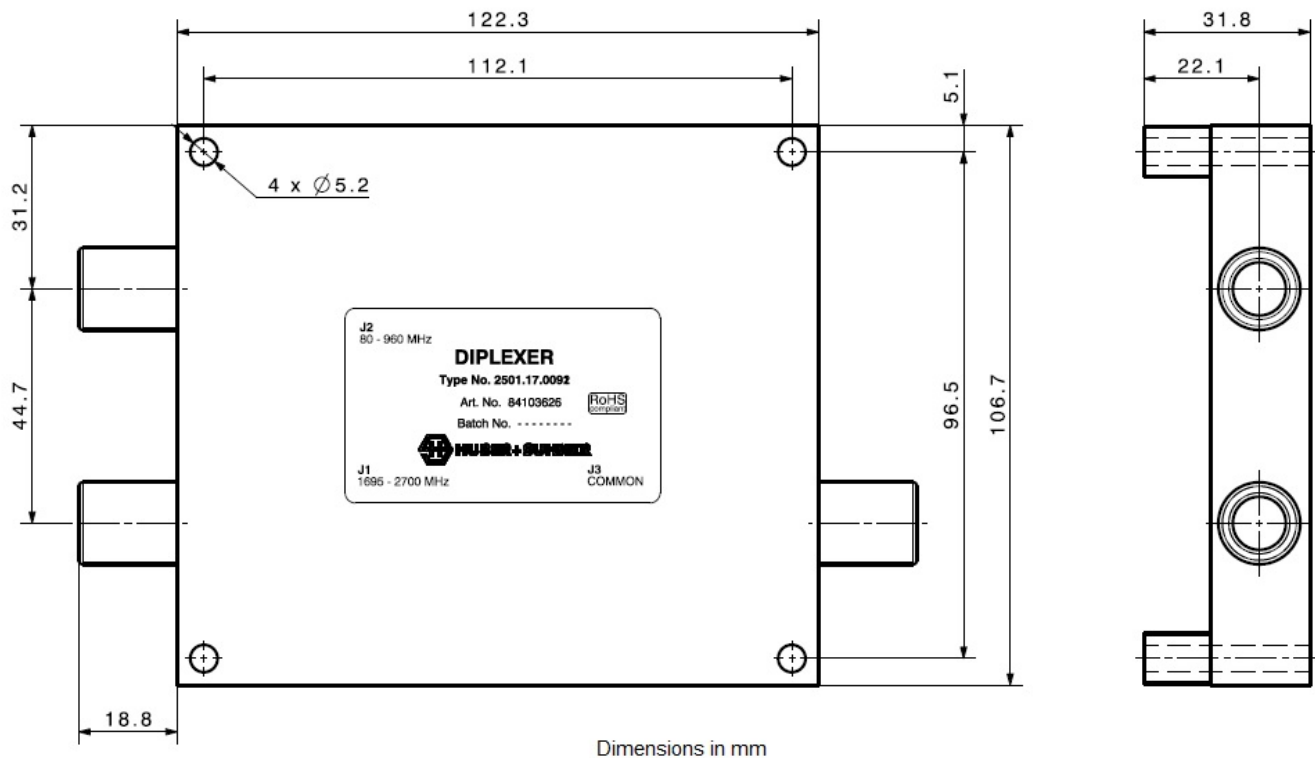

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[HUBER+SUHNER:](#)

[2501.17.0092](#)



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.