

DO NOT
SCALE FROM
THIS PRINT

LPHS-XX-XX-X-VXX-XX

POWER POS (TOTAL)

-00, -02, -04, -06, -08,
-10, *-12, *-14

SIGNAL POS (TOTAL)

-00, *-12, -16, -20, -24,
-28, -32, *-36, *-40

(* = NOT TOOLED)

OPTION

-GP: GUIDE POST
-BLANK: NO GP OPTION

TAIL

-VP1: PRESS FIT
*-VT1: FOR .062" BOARD
*-VT2: FOR .093" BOARD

PLATING SPECIFICATION

-L: 10μ" GOLD IN CONTACT AREA,
MATTE TIN TAIL
-S: 30μ" GOLD IN CONTACT AREA,
MATTE TIN TAIL
(SEE NOTE 6)

(= -00 POWER POS & -00 SIGNAL POS NOT AVAILABLE ON -GP OPTION)

DESIGNED & DIMENSIONED
IN MILLIMETERS[INCHES]

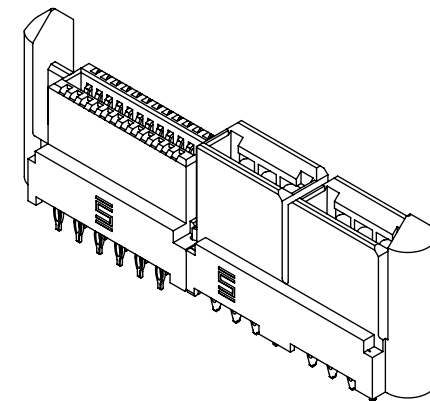
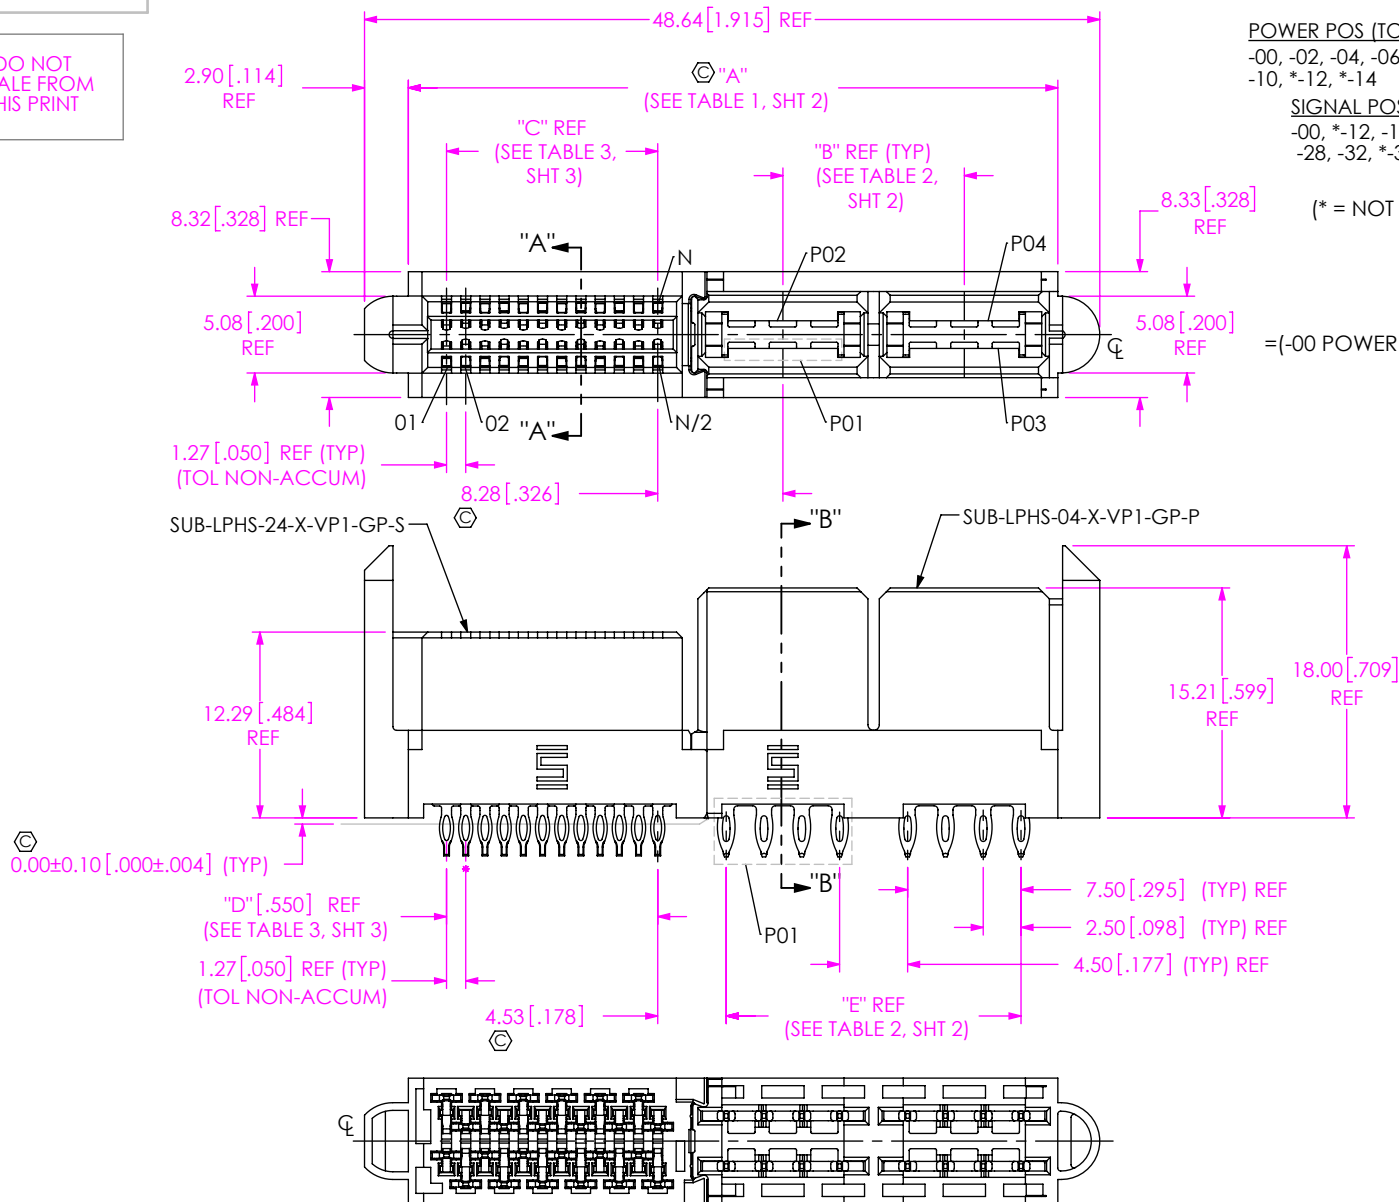


TABLE 5

POWER POS	BOW
-02, -04	0.15[.006]
-06, -08, -10, *-12, *-14	0.20[.008]

(* = NOT TOOLED)

FIG 1
LPHS-04-24-X-VP1-GP SHOWN

NOTES:

1. Ⓢ REPRESENTS A CRITICAL DIMENSION.
2. MINIMUM PUSHOUT FORCE: 0.5 LBS OF SIGNAL & 3.0 LBS OF POWER PINS.
3. MAXIMUM ALLOWABLE BOW SEE TABLE 5.
4. ASSEMBLIES TO BE PACKAGED IN TRAYS.
5. APPLICATION TOOLING REQUIRED FOR TERMINATIONS, SEE TABLE 6.
6. SELECTIVE PLATING LUBRICATED WITH ACCEL-53T WHICH CAN BE DETECTED USING A UVA ULTRAVIOLET LIGHT SOURCE.

UNLESS OTHERWISE SPECIFIED,
DIMENSIONS ARE IN MILLIMETERS.

TOLERANCES ARE:

DECIMALS ANGLES
X.X: ±0.3[.01] 2°
X.XX: ±0.13[.005]
X.XXX: ±0.051[.0020]

PROPRIETARY NOTE

THIS DOCUMENT CONTAINS CONFIDENTIAL AND PROPRIETARY INFORMATION AND ALL DESIGN, MANUFACTURING, REPRODUCTION, USE, PATENT RIGHTS AND SALES RIGHTS ARE EXPRESSLY RESERVED BY SAMTEC, INC. THIS DOCUMENT SHALL NOT BE DISCLOSED, IN WHOLE OR PART, TO ANY UNAUTHORIZED PERSON OR ENTITY NOR REPRODUCED, TRANSFERRED OR INCORPORATED IN ANY OTHER PROJECT IN ANY MANNER WITHOUT THE EXPRESS WRITTEN CONSENT OF SAMTEC, INC.

MATERIAL: DO NOT SCALE DRAWING

INSULATOR: LCP ULV-0, COLOR: BLACK
TERMINAL: COPPER ALLOY

c:\enterprisevault\DWG\MISC\MKTG\LPHS-XX-XX-X-VXX-XX-MKT.SLDDRW

SHEET SCALE: 2:1

samtec

520 PARK EAST BLVD, NEW ALBANY, IN 47150
PHONE: 812-944-6733 FAX: 812-948-5047
e-Mail: info@SAMTEC.com code 55322

DESCRIPTION:

LPHS-VT ASSEMBLY


DWG. NO.

LPHS-XX-XX-X-VXX-XX

BY: VICKY Z

12/10/2011

SHEET 1 OF 4

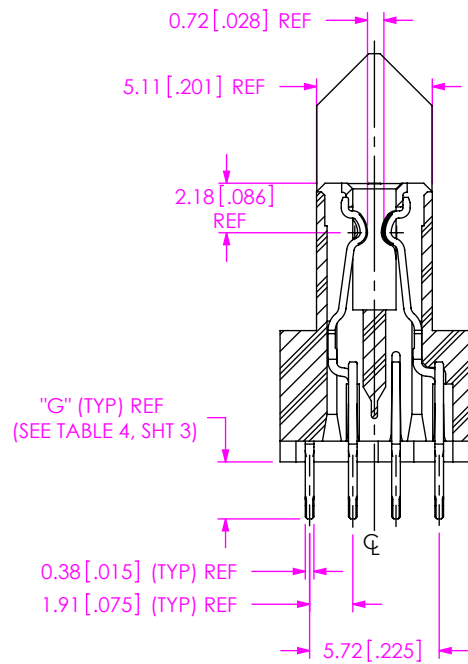

SECTION "A"-"A"

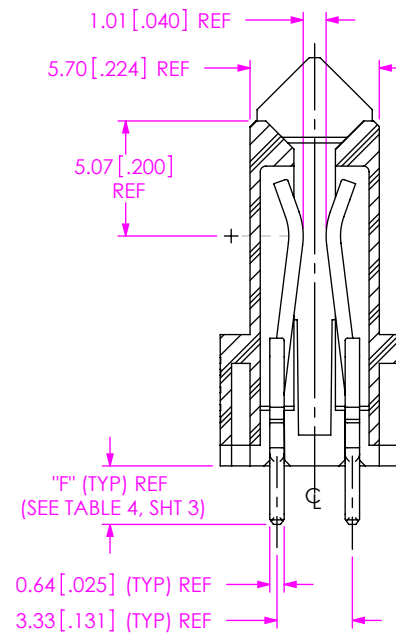


TABLE 1

SIGNAL POS	POWER POSITION						
	-02	-04	-06	-08	-10	*-12	*-14
	"A"	"A"	"A"	"A"	"A"	"A"	"A"
*-12	23.34 [0.919]	35.34 [1.391]	47.34 [1.864]	59.34 [2.336]	71.34 [2.809]	83.34 [3.281]	95.34 [3.754]
-16	25.88 [1.019]	37.88 [1.491]	49.88 [1.964]	61.88 [2.436]	73.88 [2.909]	85.88 [3.381]	97.88 [3.854]
-20	28.42 [1.119]	40.42 [1.591]	52.42 [2.064]	64.42 [2.536]	76.42 [3.009]	88.42 [3.481]	100.42 [3.954]
-24	30.96 [1.219]	42.96 [1.691]	54.96 [2.164]	66.96 [2.636]	78.96 [3.109]	90.96 [3.581]	102.96 [4.054]
-28	33.50 [1.319]	45.50 [1.791]	57.50 [2.264]	69.50 [2.736]	81.50 [3.209]	93.50 [3.681]	105.50 [4.154]
-32	36.04 [1.419]	48.04 [1.891]	60.04 [2.364]	72.04 [2.836]	84.04 [3.309]	96.04 [3.781]	108.04 [4.254]
*-36	38.58 [1.519]	50.58 [1.991]	62.58 [2.464]	74.58 [2.936]	86.58 [3.409]	98.58 [3.881]	110.58 [4.354]
*-40	41.12 [1.619]	53.12 [2.091]	65.12 [2.564]	77.12 [3.036]	89.12 [3.509]	101.12 [3.981]	113.12 [4.454]

(* = NOT TOOLED)

TABLE 2

POWER POS	"B"	"E"
-00	N/A	N/A
-02	N/A	N/A
-04	12.00 [0.472]	19.50 [0.768]
-06	24.00 [0.945]	31.50 [1.240]
-08	36.00 [1.417]	43.50 [1.713]
-10	48.00 [1.890]	55.50 [2.185]
*-12	60.00 [2.362]	67.50 [2.657]
*-14	72.00 [2.835]	79.50 [3.130]

(* = NOT TOOLED)

c:\enterprisevault\DWG\MISC\MKTG\LPHS-XX-XX-X-VXX-XX-MKT.SLDDRW

* PROPRIETARY NOTE *

THIS DOCUMENT CONTAINS CONFIDENTIAL AND PROPRIETARY INFORMATION AND ALL DESIGN, MANUFACTURING, REPRODUCTION, USE, PATENT RIGHTS AND SALES RIGHTS ARE EXPRESSLY RESERVED BY SAMTEC, INC. THIS DOCUMENT SHALL NOT BE DISCLOSED, IN WHOLE OR PART, TO ANY UNAUTHORIZED PERSON OR ENTITY NOR REPRODUCED, TRANSFERRED OR INCORPORATED IN ANY OTHER PROJECT IN ANY MANNER WITHOUT THE EXPRESS WRITTEN CONSENT OF SAMTEC, INC.

DO NOT SCALE DRAWING

SHEET SCALE: 3:1

samtec

520 PARK EAST BLVD, NEW ALBANY, IN 47150
PHONE: 812-944-6733 FAX: 812-948-5047
e-Mail info@SAMTEC.com code 55322

DESCRIPTION: LPHS-VT ASSEMBLY

DWG. NO. LPHS-XX-XX-X-VXX-XX

BY: VICKY Z 12/10/2011 SHEET 2 OF 4

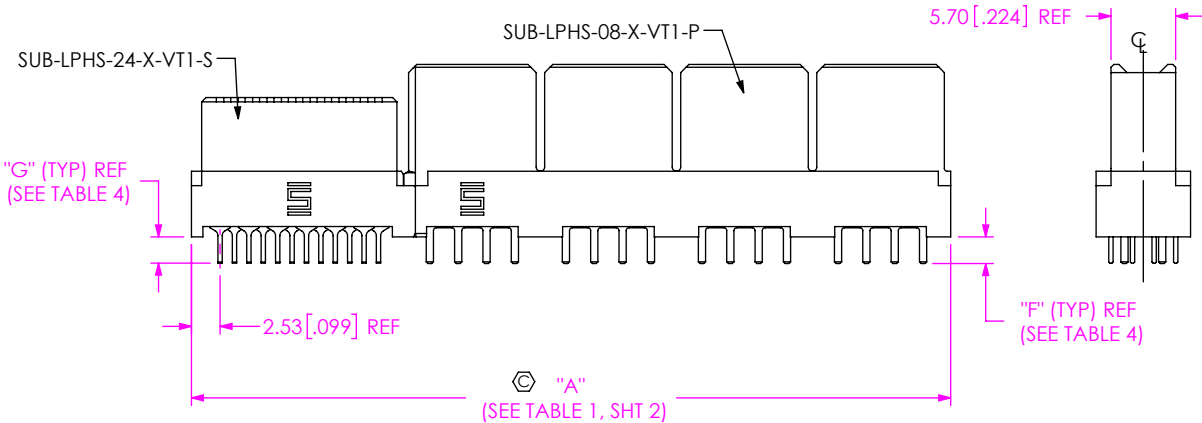



FIG 2
LPHS-08-24-X-VT1 SHOWN
(DIFFERENT AS SHOWN, OTHERWISE SAME AS FIG 1)
(NOT TOOLED)

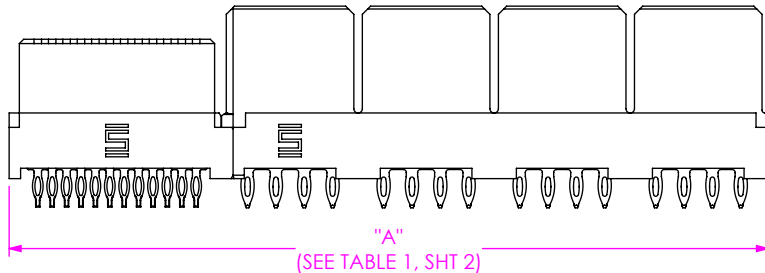


FIG 5
LPHS-08-24-X-VP1 SHOWN
(DIFFERENT AS SHOWN, OTHERWISE SAME AS FIG 1)

TABLE 4				
TAIL	POWER		SIGNAL	
	CONTACT	"F"	CONTACT	"G"
-VP1	C-367-01-X	2.58[.102]	C-379-01-X & C-380-01-X	2.51[.099]
*-VT1	C-367-02-X	2.35[.093]	C-379-02-X & C-380-02-X	2.31[.091]
*-VT2	C-367-03-X	3.13[.124]	C-379-03-X & C-380-03-X	3.06[.120]

(* = NOT TOOLED)

TABLE 6					
POWER POS	SIGNAL POS	CAT FIXTURE NO	POWER POS	SIGNAL POS	CAT FIXTURE NO
-02	*-12	CAT-PT-LPHS-02-12	-10	*-12	CAT-PT-LPHS-10-12
	-16	CAT-PT-LPHS-02-16		-16	CAT-PT-LPHS-10-16
	-20	CAT-PT-LPHS-02-20		-20	CAT-PT-LPHS-10-20
	-24	CAT-PT-LPHS-02-24		-24	CAT-PT-LPHS-10-24
	-28	CAT-PT-LPHS-02-28		-28	CAT-PT-LPHS-10-28
	-32	CAT-PT-LPHS-02-32		-32	CAT-PT-LPHS-10-32
	*-36	CAT-PT-LPHS-02-36		*-36	CAT-PT-LPHS-10-36
	*-40	CAT-PT-LPHS-02-40		*-40	CAT-PT-LPHS-10-40
-04	*-12	CAT-PT-LPHS-04-12	*-12	*-12	CAT-PT-LPHS-04-12
	-16	CAT-PT-LPHS-04-16		-16	CAT-PT-LPHS-04-16
	-20	CAT-PT-LPHS-04-20		-20	CAT-PT-LPHS-04-20
	-24	CAT-PT-LPHS-04-24		-24	CAT-PT-LPHS-04-24
	-28	CAT-PT-LPHS-04-28		-28	CAT-PT-LPHS-04-28
	-32	CAT-PT-LPHS-04-32		-32	CAT-PT-LPHS-04-32
	*-36	CAT-PT-LPHS-04-36		*-36	CAT-PT-LPHS-04-36
	*-40	CAT-PT-LPHS-04-40		*-40	CAT-PT-LPHS-04-40
-06	*-12	CAT-PT-LPHS-06-12	*-14	*-12	CAT-PT-LPHS-14-12
	-16	CAT-PT-LPHS-06-16		-16	CAT-PT-LPHS-14-16
	-20	CAT-PT-LPHS-06-20		-20	CAT-PT-LPHS-14-20
	-24	CAT-PT-LPHS-06-24		-24	CAT-PT-LPHS-14-24
	-28	CAT-PT-LPHS-06-28		-28	CAT-PT-LPHS-14-28
	-32	CAT-PT-LPHS-06-32		-32	CAT-PT-LPHS-14-32
	*-36	CAT-PT-LPHS-06-36		*-36	CAT-PT-LPHS-14-36
	*-40	CAT-PT-LPHS-06-40		*-40	CAT-PT-LPHS-14-40
-08	*-12	CAT-PT-LPHS-08-12			
	-16	CAT-PT-LPHS-08-16			
	-20	CAT-PT-LPHS-08-20			
	-24	CAT-PT-LPHS-08-24			
	-28	CAT-PT-LPHS-08-28			
	-32	CAT-PT-LPHS-08-32			
	*-36	CAT-PT-LPHS-08-36			
	*-40	CAT-PT-LPHS-08-40			

(* = NOT TOOLED)

TABLE 3		
SIGNAL POS	"C"	"D"
-00	N/A	N/A
*-12	6.35 [0.250]	6.35 [0.250]
-16	8.89 [0.350]	8.89 [0.350]
-20	11.43 [0.450]	11.43 [0.450]
-24	13.97 [0.550]	13.97 [0.550]
-28	16.51 [0.650]	16.51 [0.650]
-32	19.05 [0.750]	19.05 [0.750]
*-36	21.59 [0.850]	21.59 [0.850]
*-40	24.13 [0.950]	24.13 [0.950]

(* = NOT TOOLED)

* PROPRIETARY NOTE *
THIS DOCUMENT CONTAINS CONFIDENTIAL AND PROPRIETARY INFORMATION AND ALL DESIGN, MANUFACTURING, REPRODUCTION, USE, PATENT RIGHTS AND SALES RIGHTS ARE EXPRESSLY RESERVED BY SAMTEC, INC. THIS DOCUMENT SHALL NOT BE DISCLOSED, IN WHOLE OR IN PART, TO ANY UNAUTHORIZED PERSON OR ENTITY NOR REPRODUCED, TRANSFERRED OR INCORPORATED IN ANY OTHER PROJECT IN ANY MANNER WITHOUT THE EXPRESS WRITTEN CONSENT OF SAMTEC, INC.

DO NOT SCALE DRAWING

SHEET SCALE: 3:2



520 PARK EAST BLVD, NEW ALBANY, IN 47150
PHONE: 812-944-6733 FAX: 812-948-5047
e-Mail info@SAMTEC.com code 55322

DESCRIPTION:	LPHS-VT ASSEMBLY	
DWG. NO.	LPHS-XX-XX-X-VXX-XX	
BY: VICKY Z	12/10/2011	SHEET 3 OF 4

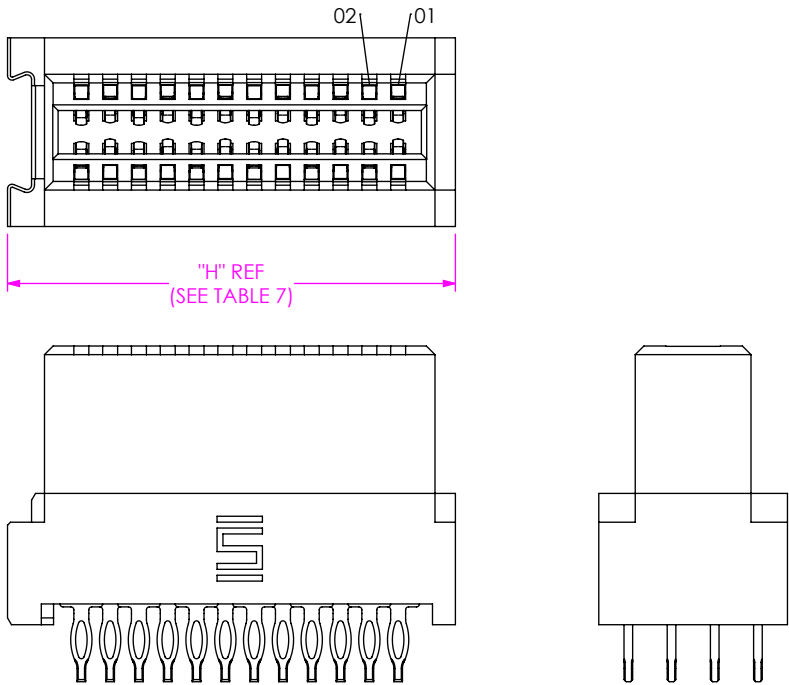


FIG 3
LPHS-00-24-X-VP1 SHOWN
(DIFFERENT AS SHOWN, OTHERWISE SAME AS FIG 1)

TABLE 7	
SIGNAL POS	POWER POSITION
	-00
	"H"
*-12	12.13 [0.478]
-16	14.67 [0.578]
-20	17.21 [0.678]
-24	19.75 [0.778]
-28	22.29 [0.878]
-32	24.83 [0.978]
*-36	27.37 [1.078]
*-40	29.91 [1.178]

(* = NOT TOOLED)

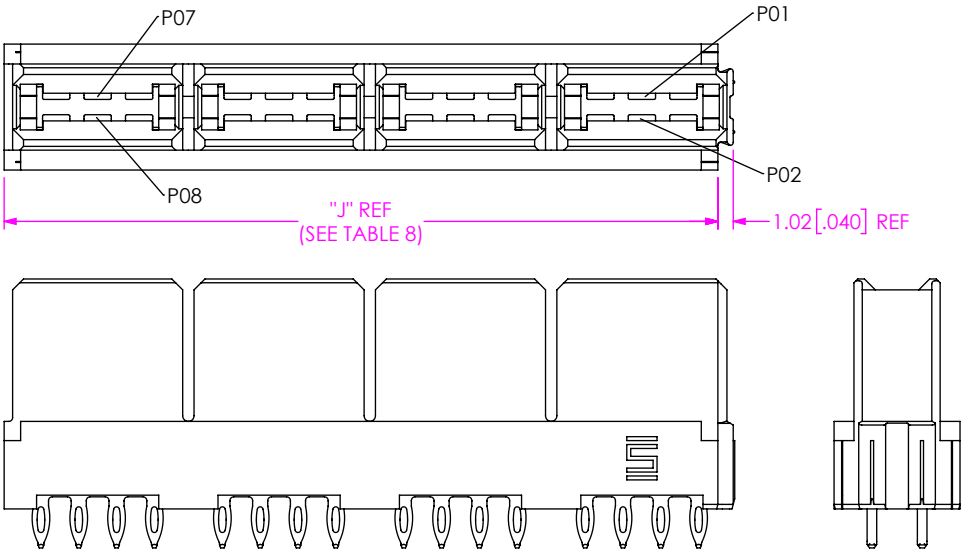


FIG 4
LPHS-08-00-X-VP1 SHOWN
(DIFFERENT AS SHOWN, OTHERWISE SAME AS FIG 1)

TABLE 8	
POWER POS	SIGNAL POSITION
	-00
	"J"
-02	11.21 [0.441]
-04	23.21 [0.914]
-06	35.21 [1.386]
-08	47.21 [1.859]
-10	59.21 [2.331]
*-12	71.21 [2.804]
*-14	83.21 [3.276]

(* = NOT TOOLED)

* PROPRIETARY NOTE *

THIS DOCUMENT CONTAINS CONFIDENTIAL AND PROPRIETARY INFORMATION AND ALL DESIGN, MANUFACTURING, REPRODUCTION, USE, PATENT RIGHTS AND SALES RIGHTS ARE EXPRESSLY RESERVED BY SAMTEC, INC. THIS DOCUMENT SHALL NOT BE DISCLOSED, IN WHOLE OR PART, TO ANY UNAUTHORIZED PERSON OR ENTITY NOR REPRODUCED, TRANSFERRED OR INCORPORATED IN ANY OTHER PROJECT IN ANY MANNER WITHOUT THE EXPRESS WRITTEN CONSENT OF SAMTEC, INC.

DO NOT SCALE DRAWING

SHEET SCALE: 3:1



520 PARK EAST BLVD, NEW ALBANY, IN 47150
PHONE: 812-944-6733 FAX: 812-948-5047
e-Mail info@SAMTEC.com code 55322

DESCRIPTION: LPHS-VT ASSEMBLY

DWG. NO. LPHS-XX-XX-X-VXX-XX

BY: VICKY Z 12/10/2011 SHEET 4 OF 4



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.