



## Product brief

# TLS850B0-family

## High-performance linear voltage regulator




The TLS850B0 is a high-performance, very low dropout linear voltage regulator for 3.3 V and 5.0 V supply in a TO263-5 and TO252-5 package.

The input voltage range of 3.0 V to 40 V and a very low quiescent current of 20  $\mu$ A make it the perfect match for automotive or other supply systems connected to the battery permanently. The new loop concept combines fast regulation and very high stability while requiring only one small ceramic capacitor of 1  $\mu$ F at the output. Below an output current of 100 mA the typical dropout voltage of 100 mV is very low. The operating range starts at an input voltage of only 3 V (extended operating range). This makes the TLS850B0 suitable for automotive systems that need to operate during cranking condition.

The device can be switched on and off by the enable feature.

Internal protection features like output current limitation and overtemperature shutdown protect the device from immediate damage.

### Application diagram for TLS850B0 for 12 V ECUs

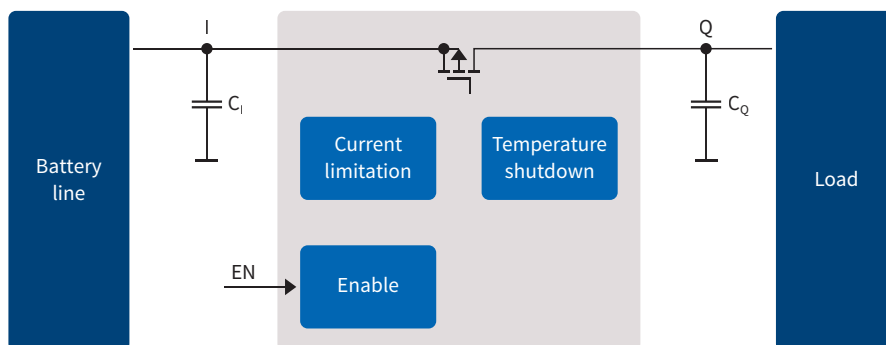

### Key features

- > Enable
- > Output voltage accuracy:  $\pm 2$  percent
- > Dropout voltage: 100 mV
- > Current consumption: 20  $\mu$ A
- > Available in TO252 and TO263 package
- > Wide operating temperature range:  $-40^{\circ}\text{C} \leq T_j \leq 150^{\circ}\text{C}$

### Benefits

- > Wide input voltage range
- > Robust TO252 and TO263 package
- > Reduces energy consumption, suitable for stand-by operation
- > Minimized external BOM


### Applications

- > General automotive MCU power supply
- > EPS, 2 wheeler dashboard, instrument cluster
- > Body electronics, HVAC panel, etc.



# TLS850B0-family

## High-performance linear voltage regulator

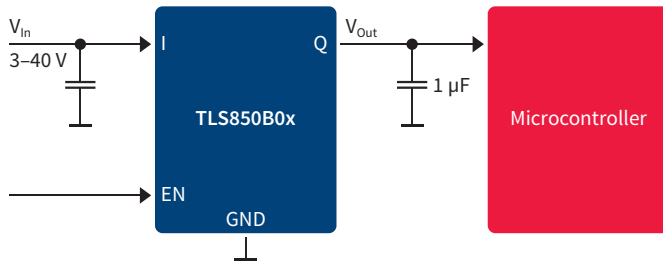

### Key features

**Low drop voltage**  
(~100 mV)

**Low current consumption**  
(~20 µA)

**Excellent regulation loop**

### Key benefits

**Suitable for cranking**  
(stop and start support from  $V_{in} = 3\text{ V}$ )

**Longer battery lifetime**

**BOM cost optimized**  
stable  $V_{out}$

## Products

Product name	OPN	Output current $I_{out}$ [mA]	Quiescent current $I_q$ [µA]	Enable	$R_{th,JA}$ [K/W]	Output voltage [V]	Package
TLS850B0TBV33	TLS850B0TBV33ATMA1	500	20	Yes	26	3.3	TO263
TLS850B0TBV50	TLS850B0TBV50ATMA1	500	20	Yes	26	5.0	TO263
TLS850B0TEV33	TLS850B0TEV33ATMA1	500	20	Yes	26	3.3	TO252
TLS850B0TEV50	TLS850B0TEV50ATMA1	500	20	Yes	26	5.0	TO252

## Demoboards

Product name	OPN	Description
TLS850B0TB50 BOARD	TLS850B0TB50BOARDTOB01	TLS850B0 Demoboard D <sup>2</sup> PAK TO263-5, 5.0 V
TLS850B0TB33 BOARD	TLS850B0TB33BOARDTOB01	TLS850B0 Demoboard D <sup>2</sup> PAK TO263-5, 3.3 V
TLS850B0TE50 BOARD	TLS850B0TE50BOARDTOB01	TLS850B0 Demoboard DPAK TO252-5, 5.0 V
TLS850B0TE33 BOARD	TLS850B0TE33BOARDTOB01	TLS850B0 Demoboard DPAK TO252-5, 3.3 V

Published by  
Infineon Technologies AG  
81726 Munich, Germany

© 2018 Infineon Technologies AG.  
All Rights Reserved.

### Please note!

THIS DOCUMENT IS FOR INFORMATION PURPOSES ONLY AND ANY INFORMATION GIVEN HEREIN SHALL IN NO EVENT BE REGARDED AS A WARRANTY, GUARANTEE OR DESCRIPTION OF ANY FUNCTIONALITY, CONDITIONS AND/OR QUALITY OF OUR PRODUCTS OR ANY SUITABILITY FOR A PARTICULAR PURPOSE. WITH REGARD TO THE TECHNICAL SPECIFICATIONS OF OUR PRODUCTS, WE KINDLY ASK YOU TO REFER TO THE RELEVANT PRODUCT DATA SHEETS PROVIDED BY US. OUR CUSTOMERS AND THEIR TECHNICAL DEPARTMENTS ARE REQUIRED TO EVALUATE THE SUITABILITY OF OUR PRODUCTS FOR THE INTENDED APPLICATION.

WE RESERVE THE RIGHT TO CHANGE THIS DOCUMENT AND/OR THE INFORMATION GIVEN HEREIN AT ANY TIME.

### Additional information

For further information on technologies, our products, the application of our products, delivery terms and conditions and/or prices, please contact your nearest Infineon Technologies office ([www.infineon.com](http://www.infineon.com)).

### Warnings

Due to technical requirements, our products may contain dangerous substances. For information on the types in question, please contact your nearest Infineon Technologies office.

Except as otherwise explicitly approved by us in a written document signed by authorized representatives of Infineon Technologies, our products may not be used in any life-endangering applications, including but not limited to medical, nuclear, military, life-critical or any other applications where a failure of the product or any consequences of the use thereof can result in personal injury.



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



#### Как с нами связаться

**Телефон:** 8 (812) 309 58 32 (многоканальный)

**Факс:** 8 (812) 320-02-42

**Электронная почта:** [org@eplast1.ru](mailto:org@eplast1.ru)

**Адрес:** 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.