

# Connectors, Adapters, and Tools

Model	Name	Use With:
213-CON	Rear Panel Mating Connector	2200-20-5, 2200-30-5, 2200-32-3, 2200-60-2, 2200-72-1
237-BAN-3A	Triax to Banana Plug	4200-SCS, 7072, 7072-HV, DMMS
237-BNC-TRX	3-Lug Female Triax to Male BNC Connector with guard disconnected	4200-SCS, 6517A, 6517B, 7078-TRX cables
237-TRX-BAR	3-Lug Triax Female to Female Barrel Adapter	2635B, 2636B, 4200-SCS, 6482, Triax interconnect
237-TRX-NG	Triax Male-Female Adapter with guard disconnected	6517A, 6517B, 7072, 7072-HV
237-TRX-T	3-slot Male to Dual 3-Lug Female Triax Tee Adapter	4200-SCS, 7072, 7072-HV, 7078-TRX cables
237-TRX-TBC	3-Lug Female Triax Bulkhead Connector	7072, 7072-HV, 7078-TRX cables
2182-325A	Silver Solder for use with 2182-KIT	2182A
2182-KIT	Low-Thermal Connector with Strain Relief (LEMO)	2182A, SC-93
2188	Low-Thermal Calibration Shorting Plug	2182A
2499-DIGIO	Digital I/O Expansion Module	SourceMeter SMU instruments
2500INT-SMA	SMA Connector	2500INT integrating sphere
2500INT-FC/PC	FP/PC Connector	2500INT integrating sphere
2500INT-FC/APC	FP/APC Connector	2500INT integrating sphere
2600-KIT	Screw Terminal Connector with Strain Relief and Cover	2601B, 2602B (2 needed), 2611B, 2612B (2 needed)
2600-TRIAX	3-Lug Triax Adapter	2601B, 2602B (2 needed), 2604B, 2611B, 2612B (2 needed), 2614B
2657A-LIM-3	Low Interconnect Module	2657A
2657A-PM-200	200V Protection Module	2657A
3706-BKPL	Analog Backplane Extender Board	Series 3700A
3720-ST	Screw Terminal Block	3720
3721-ST	Screw Terminal Block	3721
3723-ST	Screw Terminal Block	3723
3723-ST-1	Screw Terminal Block	3723
3724-ST	Screw Terminal Block	3724
3730-ST	Screw Terminal Block	3730
3731-ST	Screw Terminal Block	3731
3740-ST	Screw Terminal Block	3740
3750-ST	Screw Terminal Block	3750
3790-KIT50-R	50-pin Female D-sub Connector Kit	3721, 3730, 3731, 3740, 3750
3791-CIT	Contact Insertion and Extraction Tool	3720, 3722, 3723
3791-KIT78-R	78-pin Female D-sub Connector Kit	3720, 3723, 3724, 3732
3792-KIT104-R	104-pin Male D-sub Connector Kit	3722
3792-KIT104-R/F	104-pin Female D-sub Connector Kit	3722
4851	BNC Shorting Plug	Instruments with BNC connectors
6171	3-slot Male to 2-Lug Female Triax Adapter	2-lug triax connectors
6172	2-slot Male to 3-Lug Female Triax Adapter	7065, 2500INT
7001-PNL	Metal Plate	7001
7011-KIT-R	Female 96-pin Connector Kit	7011-C, 7012-C, 7013-C, 7015-C, 7018-C
7011-ST	Extra Screw Terminal Board	7011-S
7012-ST	Extra Screw Terminal Board	7012-S
7013-ST	Extra Screw Terminal Board	7013-S

Model	Name	Use With:
7015-ST	Extra Screw Terminal Board	7015-S
7018-ST	Extra Screw Terminal Board	7018-S
7072-TRT	Triax Removal Tool	707B, 708B
7074-CIT	Contact Extraction Tool	7152-KIT, 7152-MTR
7078-CIT	Contact Insertion/Extraction Tool	7078-KIT, 7078-MTR, 7152-KIT, 7152-MTR
7078-HCT	Hand Crimping Tool for 7078-KIT, 7169-KIT	7078-KIT
7078-KIT	Connector Kit	7071, 7071-4, 7074-D, 7078-MTR
7078-MTR	Mass Terminated Receptacle, Bulkhead Mount	7071, 7071-4, 7078-KIT, 7078-MTC
7078-TRX-BNC	3-slot Male Triax to BNC Adapter	4210-CVU, 4801, 6482, 6487, 6514, 6517A, 6517B, 7072, 7072-HV
7078-TRX-GND	3-slot Male Triax to BNC Adapter (guard removed)	4200-SCS, 4801, 6517A, 6517B, 7072, 7072-HV, Series 2600B
7078-TRX-TBC	3-Lug Female Triax Bulkhead Connector w/Cap	7078-TRX cables
7152-HCT	Hand Crimp Tool for 7152-KIT, 7152-MTR	7152-KIT, 7152-MTR
7152-KIT	6-Position M-Series Plug w/Contacts	7152, 7152-MTR
7152-MTR	6-Position M-Series Receptacle w/Sockets	7152, 7152-KIT, 7152-MTC-2, 7152-MTC-10
7703-306A	DB50 Male Connector Kit	7701, 7703, 7705, 7709
7709-308A	DB25 Male Connector Kit	7701, 7707, 7709, Series 2600B
7712-SMA-N	Female SMA to Male N-Type Adapter	7711, 7712
7755	50Ω Feed-Through Terminator	RG 58 cable, 776, 3390
7788	50-pin D Subconnector Kit	7703, 7705, 77XX, modules with D sub connectors
7789	50-pin Male and 25-pin Male D-Shell Connector Kit	7701, 7709
7790	50-pin Male, 50-pin Female, and 25-pin Male IDC D-Shell Connector Kit	7701, 7703, 7705, 7707, 7709
8610	Low Thermal Shorting Plug	2000, 2001, 2002, 2010
8620	4-Wire DMM Shorting Plug	2000, 2001, 2002, 2010, 2015, 2016, 2100, 2110, Series 2400, Series 2700, Series 3700A
8680	RTD Probe Adapter	2001, 2002, 2010, 2110
BG-18	Dual Banana to BNC Coaxial Adapter	Series 2000, 2100, 2110, Series 2400, 2700, 2750
CAP-18	Protective Shield/Cap	BNC, 2-lug triax connectors
CAP-31	Protective Shield/Cap	3-lug triax connectors
CA-573-3A1	4-Pin Round Interlock Cable, Underterminated	2657A-LIM-3
CS-400	DB25 Male Solder Cup	CA-126-1 cable, 213
CS-458	Interlock Connector Kit	6517-ILC-3
CS-565	BNC Barrel, 4200-SCS	BNC interconnect
CS-630	3-Lug Female Triax Bulkhead Connector	6487, 6517A, 6517B
CS-631	3-Lug Male Triax Cable Mount Connector	4200-SCS, SC-22 cable
CS-701	BNC Tee Adapter (Female-Male-Female)	4200-SCS
CS-719	3-Lug Triax Jack Receptacle	4200-SCS
CS-846	Screw Terminal Test Lead Connector	230X, 2510, 2510-AT
CS-970	High Voltage Bulkhead Connector	248, 248-SHV cable

1.888.KEITHLEY (U.S. only)

[www.keithley.com](http://www.keithley.com)

**KEITHLEY**


A Greater Measure of Confidence

A Tektronix Company

# Connectors, Adapters, and Tools

Model	Name	Use With:
CS-1247	SMA Female to BNC Male Adapter	4200-SCS
CS-1249	SMA Female to SMB Plug Adapter	4200-SCS
CS-1251	BNC Female to SMB Plug Adapter	4200-SCS
CS-1252	SMA Male to BNC Female Adapter	4200-SCS
CS-1281	SMA Female to SMA Female Adapter	4200-SCS
CS-1305	Interlock Connector	6517B
CS-1390	Male LEMO Triax to Female SMA Adapter	4200-SCS
CS-1391	SMA Tee Adapter (Female-Male-Female)	4200-SCS
CS-1423-3	Miniature Mating Connector	2635B, 2636B
CS-1479	SMA Male to BNC Male Adapter	4200-SCS

Model	Name	Use With:
CS-1592-2	Screw Terminal Plug	2651A
CS-1626-2	Screw Terminal Receptacle	2651A
CS-1629-8	Screw Terminal Connector	2651A
CS-1638-12	Rear Panel Mounting Connector	2200-20-5, 2200-30-5, 2200-32-3, 2200-60-2, 2200-72-1
CS-1655-15	Rear Panel Mating Connector	2220-30-1, 2220J-30-1, 2230-30-1, 2230J-30-1
HV-CS-1613	High Voltage Triax Feed Through Connector/Barrel (female to female)	2657A, 2600-PCT-x, 4200-PCT-x
TL-24	SMA Torque Wrench	4200-SCS, System 46, System 46T

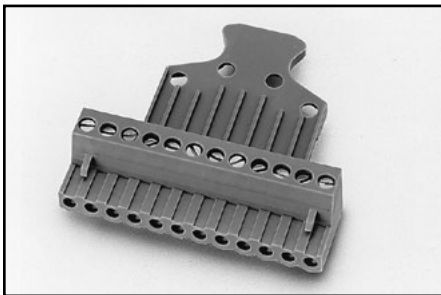

**Model 213-CON Rear Panel Mating Connector:** Quick disconnect, 12-screw terminal connector with handle.

**For use with:** 2200-20-5, 2200-30-5, 2200-32-3, 2200-60-2, 2200-72-1




**Model 237-BNC-TRX:** Male BNC to 3-lug female triax adapter (guard disconnected). Terminates triax cable in BNC plug. High voltage rating for use with 7072-HV.

**For use with:** 4200-SCS, 6517A, 6517B, 7078-TRX cables



**Model 237-TRX-NG:** 3-slot triax to 3-lug female triax adapter (guard removed) for non-guarded measurements. High voltage rating for use with 7072-HV, etc.

**For use with:** 6517A, 6517B, 7072, 7072-HV

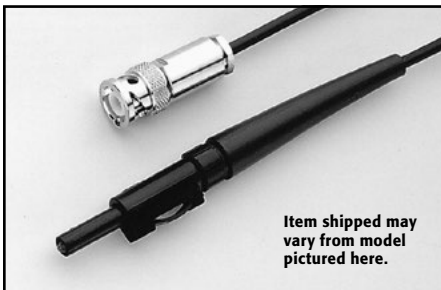

**Model 237-BAN-3A Triax to Banana Plug:** Triax cable center conductor terminated in a safety banana plug (guard and shield open). For connecting DMMs and other banana jack instruments to a matrix or fixture.

**For use with:** 4200-SCS, 7072, 7072-HV, DMMs



**Model 237-TRX-BAR:** 3-lug triax barrel (female to female) for use with triax interconnect.

**For use with:** 2635B, 2636B, 4200-SCS, triax interconnect



**Model 237-TRX-T:** 3-slot male to dual 3-lug female triax tee adapter for use with 7078-TRX cables and 7072/7072-HV Semiconductor Matrix Cards. High voltage rating for use with Model 6517B Electrometer.

**For use with:** 4200-SCS, 6517A, 6517B, 7072, 7072-HV, 7078-TRX cables

1.888.KEITHLEY (U.S. only)

[www.keithley.com](http://www.keithley.com)

A Greater Measure of Confidence

**KEITHLEY**

A Tektronix Company

# Connectors, Adapters, and Tools



**Model 237-TRX-TBC:** 3-lug female triax bulkhead connector with cap for assembly of custom panels and interface connections. High voltage rating for use with 7072-HV, etc. Uses miniature coax cable, not triax cable, at soldered end. Bulkhead is outer shield.

**For use with:** 7072, 7072-HV, 7078-TRX cables

**Model 2182-325A:** Silver solder for making connections in experiments with the Model 2182A. 20 ft roll.

**For use with:** 2182A



**Model 2182-KIT Low-Thermal Connector with Strain Relief:** Connector kit for building a custom input cable for the Model 2182A Nanovoltmeter. Includes a low-thermal (LEMO) connector and a strain relief.

**For use with:** 2182A, SC-93



**Model 2188 Low-Thermal Calibration Shorting Plug:** A low-resistance, low-thermal shorting plug required to calibrate the Model 2182A Nanovoltmeter. Made of a LEMO connector with its pin connectors shorted together using copper wire and Sn/Ag<sub>4</sub> silver solder.

**For use with:** 2182A



**Model 2499-DIGIO:** Digital I/O expansion module that plugs onto the DB-9 connector of a SourceMeter<sup>®</sup> SMU instrument. Expands the three digital I/O lines of the SourceMeter to 16 lines. The SOT, EOT/BUSY, 5V, GND, and Interlock signals are passed through.

**Services Available:** 1-year factory warranty extended to 3 years from date of shipment

**For use with:** SourceMeter SMU Instruments

**Model 2500INT-FC/APC:** FC/APC connector for 2500-INT Integrating Sphere.

**For use with:** 2500-INT




**Model 2500INT-FC/PC:** FC/PC connector for 2500-INT Integrating Sphere.

**For use with:** 2500-INT



**Model 2500INT-SMA:** SMA connector for 2500-INT Integrating Sphere.

**For use with:** 2500-INT

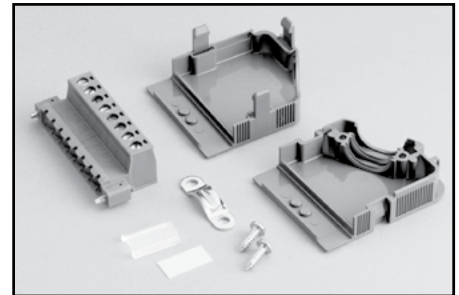

**Model 2600-KIT:** Screw terminal connector kit with extra screw terminal connector, strain relief, and cover for a single SourceMeter channel (two needed for use with Models 2602B, 2612B, and 2614B).

**For use with:** 2601B, 2602B, 2604B, 2611B, 2612B, 2614B, 2651A



**Model 2600-TRIAX:** Triax adapter for a single Series 2600B SourceMeter channel (two needed for use with Models 2602B and 2612B). For use with standard 3-lug triax cables.

**For use with:** 2601B, 2602B, 2611B, 2612B

1.888.KEITHLEY (U.S. only)

[www.keithley.com](http://www.keithley.com)

# Connectors, Adapters, and Tools



**Model 2657A-LIM-3:** Low Interconnect Module for use with 2657A, HV triax cables (3kV rated).

**For use with: Series 2657A**



**2657A-PM-200:** 200V protection module to protect standard triax instruments from 2657A, standard and HV triax cables (3kV rated).

**For use with: Series 2657A**




**Model 3706-BKPL:** Analog backplane extender board, 15-pin D-sub to terminal block.

**For use with: Series 3700A**




**Model 3720-ST:** Screw Terminal Block. Required with the Model 3720 for automatic CJC thermocouple measurements.

**For use with: 3720**

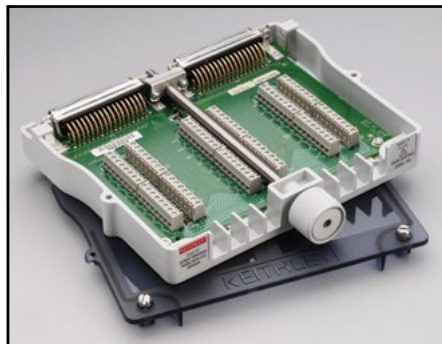


**Model 3721-ST:** Screw Terminal Block. Required with the Model 3721 for automatic CJC thermocouple measurements.

**For use with: 3721**

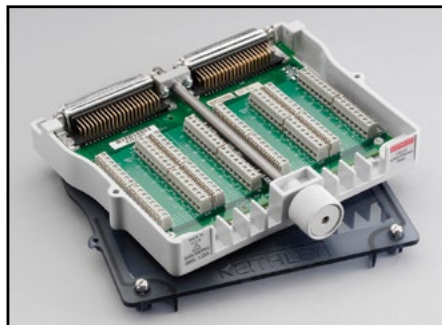


**Model 3723-ST:** Screw Terminal Block. Accessory for Model 3723 for two-pole applications.

**For use with: 3723**

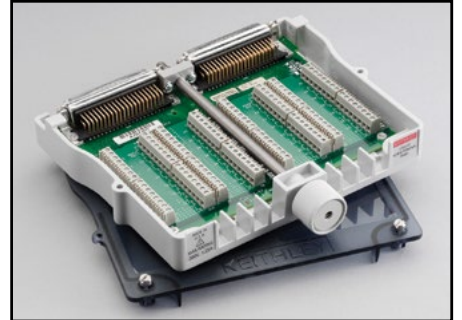


**Model 3723-ST-1:** Screw Terminal Block. Accessory for the Model 3723 for single-pole applications.

**For use with: 3723**

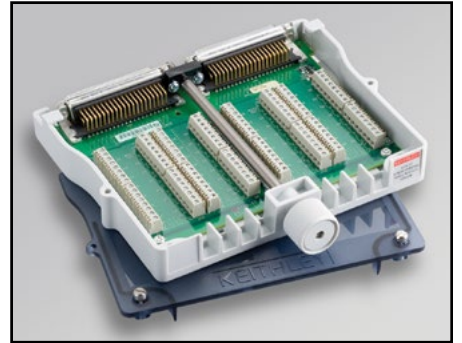

**Model 3724-ST:** Screw Terminal Block.

**For use with: 3724**

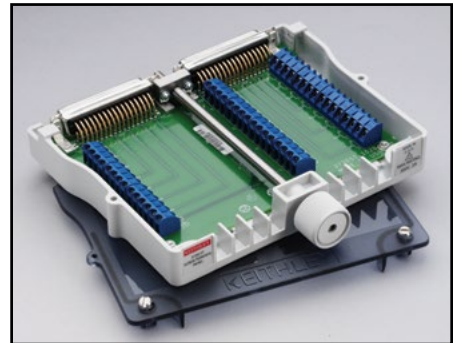

**Model 3730-ST:** Screw Terminal Block.

**For use with: 3730**

1.888.KEITHLEY (U.S. only)


[www.keithley.com](http://www.keithley.com)

A Greater Measure of Confidence

**KEITHLEY**


A Tektronix Company

# Connectors, Adapters, and Tools

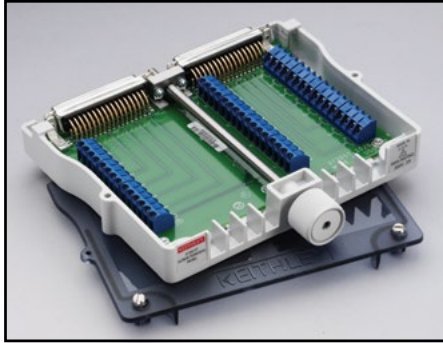


**Model 3731-ST:** Screw Terminal Block.

**For use with: 3731**

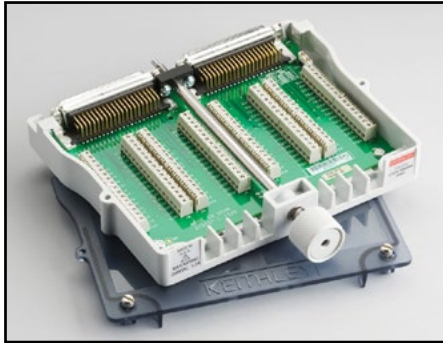


**Model 3732-ST-C:** Screw Terminal Block. Enables screw terminal access and additional matrix sizes including: quad 4×28 (1W), dual 4×28 (2W), single 4×56 (2W), dual 4×56 (1W), and single 4×112 (1W).

**For use with: 3732**

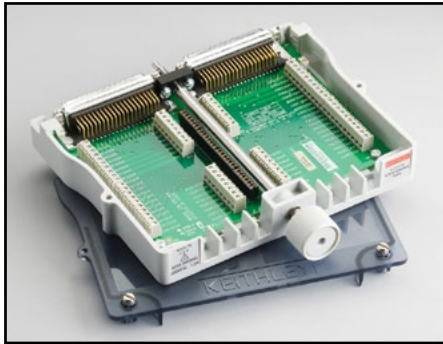


**Model 3732-ST-R:** Screw Terminal Block. Enables screw terminal access and additional matrix sizes including: dual 8×28 (1W), single 8×28 (2W), and single 16×28 (1W).

**For use with: 3732**

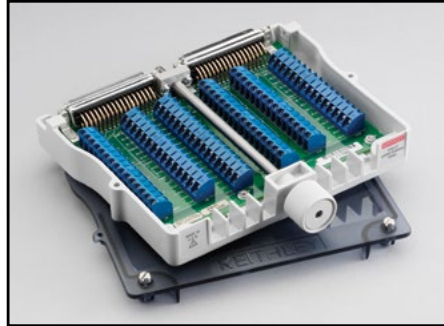

**Model 3740-ST:** Screw Terminal Block.

**For use with: 3740**

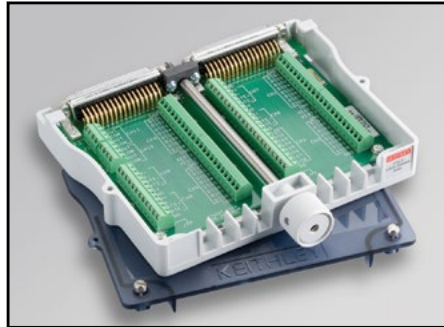

**Model 3750-ST:** Screw Terminal Block.

**For use with: 3750**



**Model 3790-KIT50-R:** 50-pin female D-sub connector kit that contains two female D-sub connectors and 100 solder cup contacts. Use for assembly of custom cable and harnesses compatible with Series 3700A plug-in cards.

**For use with: 3721, 3730, 3731, 3740, 3750**



**Model 3791-CIT:** Contact insertion and extraction tool for assembly and maintenance of Series 3700A D-sub Connector kits.

**For use with: 3791-KIT78-R, 3791-KIT104-R**



**Model 3791-KIT78-R:** 78-pin female D-sub connector kit that contains two female D-sub connectors and 156 solder-cup contacts. Use for assembly of custom cable and harnesses compatible with Series 3700A plug-in cards.

**For use with: 3720, 3723, 3724, 3732**



**Model 3792-KIT104-R:** 104-pin male D-sub connector kit that contains two male D-sub connectors with housings and 208 solder-cup contacts. Use for assembly of custom cable and harnesses compatible with Series 3700A plug-in cards.

**For use with: 3722**

1.888.KEITHLEY (U.S. only)

[www.keithley.com](http://www.keithley.com)

# Connectors, Adapters, and Tools



**Model 3792-KIT104-R/F:** 104-pin female D-sub connector kit that contains two female D-sub connectors with housings and 208 solder-cup contacts. Use for assembly of custom cables, harnesses, and DUT interface compatible with Series 3700A plug-in cards.

**For use with:** 3722



**Model 4851:** BNC shorting plug.

**For use with:** Instruments with BNC connectors




**Model 6171:** 3-slot male to 2-lug female triax adapter.

**For use with:** 2-lug triax connectors



**Model 6172:** 2-slot male to 3-lug female triax adapter. For use in adapting Models 7065 and 2500INT inputs to 3-slot triax plugs.

**For use with:** 2500INT, 7065

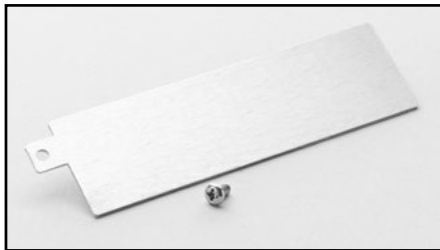


**Model 7001-PNL:** Metal plate used to cover an empty card slot on the rear panel of a Model 7001.

**For use with:** 7001




**Model 7011-KIT-R:** 96-pin female DIN connector with solder eyelets and strain relief. This kit can be used for assembly of custom cables to connect with the connectors on the 7011-C, 7012-C, 7013-C, 7015-C, and 7018-C switch cards. Also connects with the 7011-MTR bulk-head mount male connector.

**For use with:** 7011-C, 7012-C, 7013-C, 7015-C, 7018-C

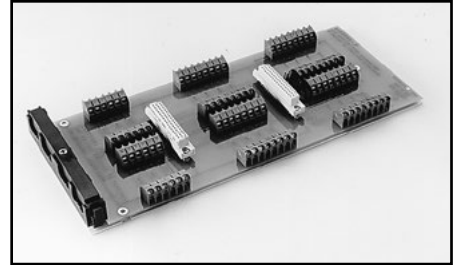


**Model 7011-ST:** Extra quick disconnect screw terminal board. One 7011-ST is included with each 7011-S.

**For use with:** 7011-S

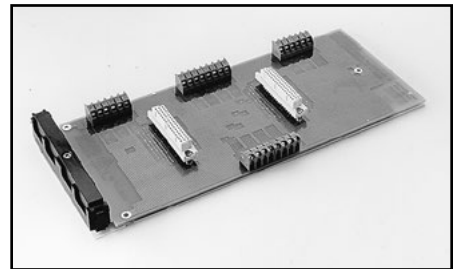

**Model 7012-ST:** Extra quick disconnect screw terminal board. One 7012-ST is included with each 7012-S.

**For use with:** 7012-S

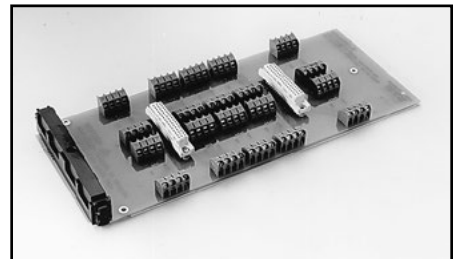

**Model 7013-ST:** Extra quick disconnect screw terminal board. One 7013-ST is included with each 7013-S.

**For use with:** 7013-S

1.888.KEITHLEY (U.S. only)


[www.keithley.com](http://www.keithley.com)

A Greater Measure of Confidence

**KEITHLEY**


A Tektronix Company

# Connectors, Adapters, and Tools

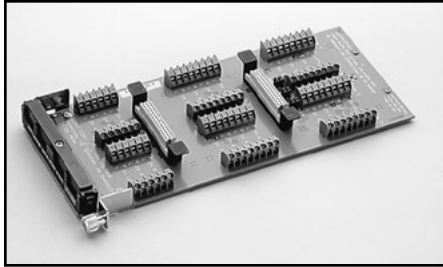


**Model 7015-ST:** Extra quick disconnect screw terminal board. One 7015-ST is included with each 7015-S.

**For use with: 7015-S**

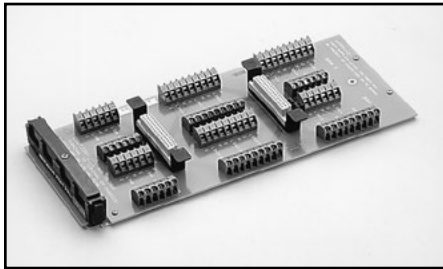


**Model 7018-ST:** Extra quick disconnect screw terminal board. One 7018-ST is included with each 7018-S.

**For use with: 7018-S**

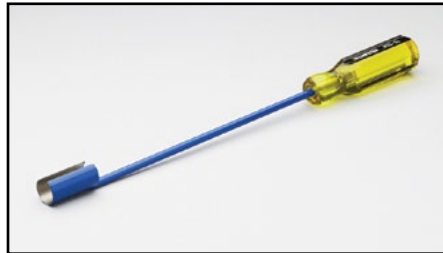

**Model 7072-TRT:** Triax removal tool used to connect or disconnect triax style connectors when clearance is limited making it difficult to mate or unmate a connector with your fingers.

**For use with: 707B, 708B**

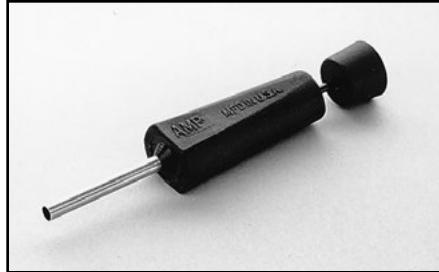

**Model 7074-CIT:** Contact extraction tool for removal of contacts from cables and connectors.

**For use with: 7152-KIT, 7152-MTR**




**Model 7078-CIT:** Contact insertion and extraction tool for assembly and maintenance of 7078-MTC cables and connectors.

**For use with: 7078-KIT, 7078-MTR, 7152-KIT, 7152-MTR**




**Model 7078-HCT:** Contact crimping pliers for assembly of cables and connectors using 7078-MTR or 7078-KIT.

**For use with: 7078-KIT**

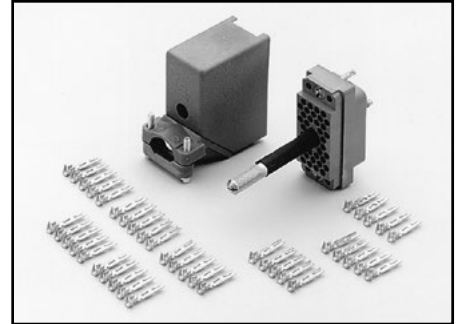

**Model 7078-KIT:** 38-pin male plug assembly with strain relief and 40 contacts for assembly of custom cable and harnesses compatible with Model 7071 8x12 Matrix Card, Model 7071-4 Dual 4x12 Matrix Card, and 7078-MTR Mass Terminated Receptacle. Requires 7078-HCT; recommend 7078-CIT.

**For use with: 7071, 7071-4, 7074-D, 7078-MTR**

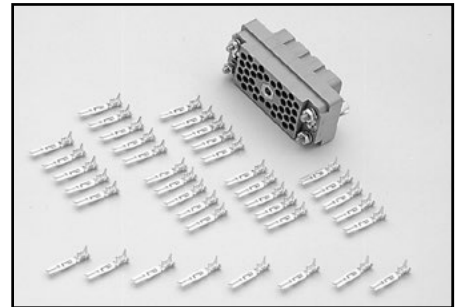

**Model 7078-MTR:** 38-pin female bulkhead mount receptacle with 40 contacts for custom interface and patch panels compatible with 7078-MTC and 7078-KIT. Requires 7078-HCT; recommend 7078-CIT.

**For use with: 7078-KIT, 7078-MTC, 7071, 7071-4**



**Model 7078-TRX-BNC:** 3-slot male triax to BNC adapter for use with 7072 Semiconductor Matrix Card and 4801 cables.

**For use with: 4210-CVU, 4801, 6482, 6487, 6514, 6517A, 6517B, 7072, 7072-HV**

1.888.KEITHLEY (U.S. only)

[www.keithley.com](http://www.keithley.com)

**KEITHLEY**

A Greater Measure of Confidence

A Tektronix Company

# Connectors, Adapters, and Tools



**Model 7078-TRX-GND:** 3-slot male triax to female BNC adapter (guard removed) for adapting non-guarded measurements to the Model 7072 or 7072-HV Semiconductor Matrix Cards or 8006 or 8008 Test Fixtures.

**For use with:** Series 2600B, 4801, 6517A, 6517B, 7072, 7072-HV




**Model 7078-TRX-TBC:** 3-lug female triax bulkhead connector with cap for assembly of custom panels and interface connections.

**For use with:** 7078-TRX Cables



**Model 7152-HCT:** Contact crimping pliers for assembly of cables and connector using 7152-MTR or 7152-KIT.

**For use with:** 7152-KIT, 7152-MTR

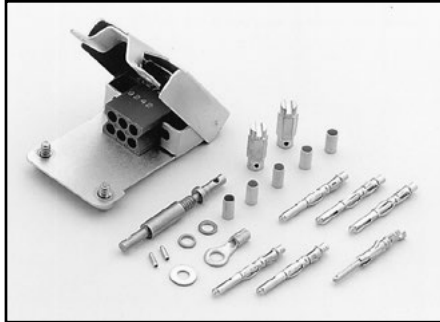

**Model 7152-KIT:** 6-pin plug assembly with strain relief and contacts for assembly of custom cable and harnesses compatible with Model 7152 4x5 Low Current Matrix Card and 7152-MTR Mass Terminated Receptacle. Requires 7152-HCT recommend 7074-CIT and 7074-HCT.

**For use with:** 7152, 7152-MTR



**Model 7152-MTR:** 6-pin bulkhead mount receptacle with contacts for custom interface and patch panels compatible with 7152-MTC and 7152-KIT. Requires 7152 HCT; recommend 7074-CIT and 7074-HCT.

**For use with:** 7152, 7152-KIT, 7152-MTC-2, 7152-MTC-10



**Model 7703-306A:** DB50 male connector kit (solder cup) with shell.

**For use with:** 7701, 7703, 7705, 7709



**Model 7709-308A:** DB25 male connector kit (solder cup) with shell.

**For use with:** 7701, 7707, 7709, Series 2600B



**Model 7712-SMA-N:** Female SMA to male N-type adapter.

**For use with:** 7711, 7712



**Model 7755 50Ω Feed-Through Terminator:** BNC-to-BNC adapter for terminating RG58 cable in its characteristic impedance. VSWR <1.1, DC-250MHz.

**For use with:** RG58 Cable, 776, 3390

1.888.KEITHLEY (U.S. only)

[www.keithley.com](http://www.keithley.com)

A Greater Measure of Confidence

**KEITHLEY**

A Tektronix Company



# Connectors, Adapters, and Tools



**Model 7788:** 50-pin D subminiature connector kit. To mate with 50-pin connector on Model 7703 and 7705.

**For use with:** 7703, 7705, 77xx modules with D-sub connectors



**Model 7789:** 50-pin/25-pin (both male) D-Shell Kit (one of each) for 7701 or 7709 Integra modules (mating connectors are supplied with these modules when purchased).

**For use with:** 7701, 7709




**Model 7790:** 50 pin male, 50 pin female, 25 pin male IDC D-Shell Connector Kit (one each).

**For use with:** 7701, 7703, 7705, 7707, or 7709 Integra modules



**Model 8610 Low Thermal Shorting Plug:** For calibration lab use, this plug provides a very low thermal offset short at front or rear inputs.

**For use with:** All DMMs

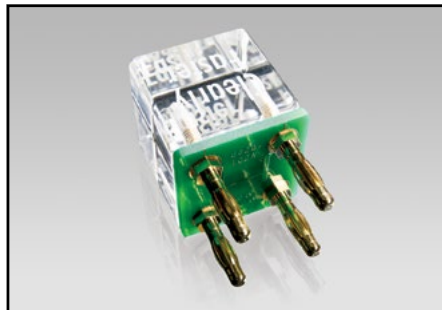

**Model 8620 Four-Wire DMM Shorting Plug:** Provides a low resistance 4-wire short to both observe and cancel DMM offset resistances and voltages to improve measurement accuracies.

**For use with:** All DMMs, Series 2400, Series 2700, Series 3700A



**Model 8680 RTD Probe Adapter:** Provides a means of connecting RTD probes terminated in either a 4-wire instrumentation connector or bare wires to safety input jacks on a 0.5 inch spacing.

**For use with:** 2001, 2002, 2010, 2100, 2110, 8681



**BG-18:** Dual banana to BNC coaxial adapter for adapting connection on instrument with dual banana jack.

**For use with:** All DMMs, Series 2400



**CAP-18:** Protective shield/cap for BNC connectors.

**For use with:** BNC connectors



**CAP-31:** Protective shield/cap for 3-lug triax connectors.

**For use with:** 3-lug triax connectors



**CS-400:** DB25 male solder cup.

**For use with:** C126-1 cable, 213



**CS-458:** Interlock connector kit to mate with 6517-ILC-3.

**For use with:** 6517-ILC-3

1.888.KEITHLEY (U.S. only)

[www.keithley.com](http://www.keithley.com)

# Connectors, Adapters, and Tools



**CS-565:** Female BNC to female BNC adapter with 50Ω nominal impedance.  
**For use with:** 4200-SCS, BNC interconnect



**CS-719:** 3-lug triax jack receptacle.  
**For use with:** 4200-SCS



**CS-1251:** BNC female to SMB plug adapter  
**For use with:** 4200-SCS



**CS-630:** 3-lug female triax bulkhead connector for soldered connection. Mates with CS-631.  
**For use with:** Fixtures, 6487, 6517A, 6517B



**CS-846:** Eight position connector with screw terminals for connection to test leads.  
**For use with:** 230x, 2510, 2510-AT



**CS-1252:** SMA male to BNC female adapter  
**For use with:** 4200-SCS



**CS-631:** 3-slot male triax cable mount connector for use with SC-22 cable. Mates to Models 7072, and 8006.  
**For use with:** 4200-SCS, SC-22 cable



**CS-970:** High voltage bulkhead connector.  
**For use with:** 248, 248-SHV cable



**CS-1281:** SMA female to SMA female adapter  
**For use with:** 4200-SCS



**CS-701:** BNC tee adapter (female, male, female).  
**For use with:** 4200-SCS



**CS-1247:** SMA female to BNC male adapter  
**For use with:** 4200-SCS



**CS-1305:** Interlock connector to mate with Model 6517B.  
**For use with:** 6517B



**CS-1249:** SMA female to SMB plug adapter  
**For use with:** 4200-SCS

1.888.KEITHLEY (U.S. only)

[www.keithley.com](http://www.keithley.com)

A Greater Measure of Confidence


**KEITHLEY**  
A Tektronix Company

# Connectors, Adapters, and Tools




**CS-1390:** Male LEMO triax to female SMA adapter

**For use with:** 4200-SCS

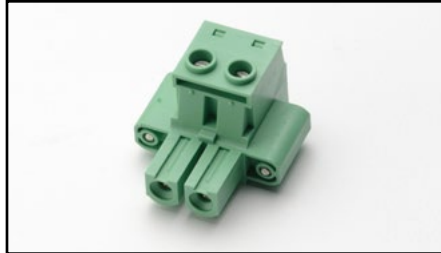

**CS-1592-2:** 2-pin male screw terminal connector plug. Rated 50A. Mates with the Model CS-1626-2 screw terminal block.

**For use with:** 2651A

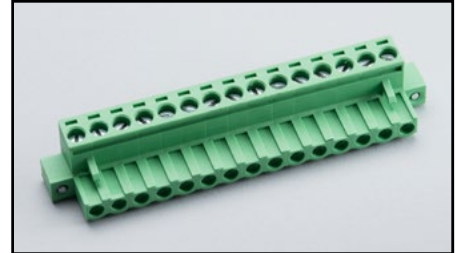


**CS-1655-15:** 15-pin rear panel output connector.

**For use with:** 2200-30-1, 2220J-30-1, 2230-30-1, 2230J-30-1



**CS-1391:** SMA tee adapter (female-male-female)

**For use with:** 4200-SCS

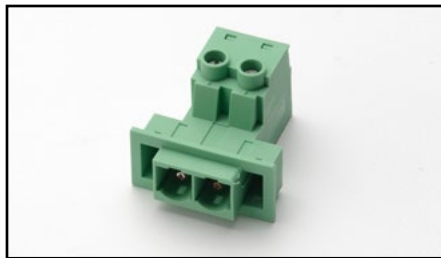

**CS-1626-2:** 2-pin female screw terminal connector block. Rated 50A. Mates with Model CS-1592-2 screw terminal connector.

**For use with:** 2651A



**HV-CS-1613:** High voltage triax feed through connector/barrel (female to female) (3kV rated).

**For use with:** For use with: 2600-PCT-x, 2657A, 4200-PCT-x



**CS-1423-3:** Miniature mating connector used as a ground connector for the Models 2635B and 2636B.

**For use with:** 2635B, 2636B



**CS-1629-8:** 8-pin female cable termination block.

**For use with:** 2651A




**TL-24:** SMA torque wrench

**For use with:** 4200-SCS, System 46, System 46T



**CS-1479:** SMA male to BNC male adapter.

**For use with:** 4200-SCS

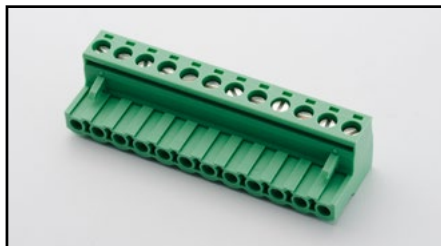

**CS-1638-12:** 12-pin rear panel output connector.

**For use with:** 2200-20-5, 2200-30-5, 2200-32-3, 2200-60-2, 2200-72-1

1.888.KEITHLEY (U.S. only)

[www.keithley.com](http://www.keithley.com)



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



#### Как с нами связаться

**Телефон:** 8 (812) 309 58 32 (многоканальный)

**Факс:** 8 (812) 320-02-42

**Электронная почта:** [org@eplast1.ru](mailto:org@eplast1.ru)

**Адрес:** 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.