

## Introducing WPM White Polyester Matte Finish Label

TE Connectivity's (TE) new high-durability, white polyester label with matte finish is a thermal transfer printable label with a permanent acrylic adhesive. Its excellent clarity, high initial tack, high shear and ultimate adhesion make this label the perfect choice for a variety of indoor low surface energy applications. Where glossy labels can be highly reflective, the matte label finish effectively reduces glare when adhered to polished lighting fixtures, electronic components, etc. The label supports applications such as bar coding, PCB and component labeling, as well as general purpose labeling applications that require a high-durability white label. Even when exposed to a variety of solvents and elevated temperatures of as much as 200°F (93°C), the WPM white polyester matte finish label resists cracking and splitting, maintaining both its print quality and initial appearance.

### KEY FEATURES

- Excellent dimensional stability at elevated temperatures
- Excellent chemical resistance
- Various colors available
- Thermal transfer printable
- Ink receptive topcoat

### APPLICATIONS

- Bar code labeling
- Electronic device and equipment labeling
- Lighting
- Racks and panels
- General purpose label application

### ENVIRONMENTAL AND STORAGE PROPERTIES

- Service temperature: -54°C to +93°C (-65°F to +200°F)
- Minimum application temperature: +2°C (+35°F)
- Shelf life: 2 years when stored at 21°C (+70°F) at 50% RH

### PRINT TECHNOLOGY

- Thermal transfer label
- Recommended printer: T300 series
- Recommended ribbon: 1330-0607-10

### STANDARDS

- Compliant to EU RoHS Directive 2002/95/EC

### PRODUCT SAMPLES

Samples are available upon request. Please call +1 800-430-7226.

### TECHNICAL DATASHEET

The technical datasheet TTDS-234 is available on [te.com](http://te.com)


[te.com/products/identification-labeling](http://te.com/products/identification-labeling)



PRODUCT OFFERING

| Part number | Part Description | Packaging Quantity | # AC | Label Width |       | Label Height |       | Horizontal Repeat |       | Vertical Repeat |       | Web Width |       | SAP #      |
|-------------|------------------|--------------------|------|-------------|-------|--------------|-------|-------------------|-------|-----------------|-------|-----------|-------|------------|
|             |                  |                    |      | mm          | in    | mm           | in    | mm                | in    | mm              | in    | mm        | in    |            |
| 5-1899668-6 | WPM-064064-25-9  | 25000              | 12   | 6,4         | 0,250 | 6,4          | 0,250 | 6,4               | 0,250 | 9,5             | 0,375 | 82,2      | 3,24  | CR3436-000 |
| 5-1899668-7 | WPM-080080-10-9  | 10000              | 8    | 8,0         | 0,315 | 8,0          | 0,315 | 9,9               | 0,39  | 13,3            | 0,525 | 83,3      | 3,28  | CR3437-000 |
| 5-1899668-8 | WPM-089047-10-9  | 10000              | 5    | 8,9         | 0,350 | 4,7          | 0,185 | 11,4              | 0,45  | 7,9             | 0,313 | 60,6      | 2,386 | CR3446-000 |
| 6-1899668-0 | WPM-095095-10-9  | 10000              | 7    | 9,5         | 0,375 | 9,5          | 0,375 | 11,1              | 0,437 | 12,7            | 0,5   | 64,3      | 2,531 | CR3447-000 |
| 6-1899668-1 | WPM-114040-25-9  | 25000              | 6    | 11,4        | 0,450 | 4,0          | 0,158 | 11,4              | 0,45  | 7,1             | 0,282 | 74,6      | 2,936 | CR3448-000 |
| 6-1899668-2 | WPM-127032-10-9  | 10000              | 5    | 12,7        | 0,500 | 3,2          | 0,126 | 19,1              | 0,75  | 6,4             | 0,25  | 94,6      | 3,736 | CR3449-000 |
| 6-1899668-3 | WPM-127064-10-9  | 10000              | 6    | 12,7        | 0,500 | 6,4          | 0,252 | 15,2              | 0,6   | 9,5             | 0,375 | 95,3      | 3,75  | CR3450-000 |
| 6-1899668-4 | WPM-127111-10-9  | 10000              | 5    | 12,7        | 0,500 | 11,1         | 0,437 | 16,8              | 0,662 | 14,3            | 0,563 | 86        | 3,38  | CR3451-000 |
| 6-1899668-5 | WPM-127127-10-9  | 10000              | 5    | 12,7        | 0,500 | 12,7         | 0,500 | 15,9              | 0,625 | 15,9            | 0,625 | 82,6      | 3,25  | CR3452-000 |
| 6-1899668-6 | WPM-165051-25-9  | 25000              | 4    | 16,5        | 0,650 | 5,1          | 0,200 | 17,8              | 0,7   | 8,3             | 0,325 | 75,8      | 2,99  | CR3453-000 |
| 6-1899668-7 | WPM-171171-10-9  | 10000              | 5    | 17,1        | 0,674 | 17,1         | 0,674 | 19,7              | 0,774 | 20,3            | 0,8   | 101,8     | 4,006 | CR3454-000 |
| 6-1899668-8 | WPM-178095-10-9  | 10000              | 4    | 17,8        | 0,700 | 9,5          | 0,375 | 19,1              | 0,75  | 12,7            | 0,5   | 80,9      | 3,19  | CR3455-000 |
| 7-1899668-0 | WPM-191064-10-9  | 10000              | 4    | 19,1        | 0,750 | 6,4          | 0,250 | 21,6              | 0,85  | 9,5             | 0,375 | 89,9      | 3,54  | CR3457-000 |
| 7-1899668-1 | WPM-203127-10-9  | 10000              | 4    | 20,3        | 0,800 | 12,7         | 0,500 | 22,9              | 0,9   | 15,9            | 0,625 | 94,6      | 3,73  | CR3458-000 |
| 7-1899668-2 | WPM-229064-10-9  | 10000              | 3    | 22,9        | 0,900 | 6,4          | 0,250 | 28,6              | 1,125 | 9,5             | 0,375 | 86        | 3,39  | CR3459-000 |
| 7-1899668-3 | WPM-254064-10-9  | 10000              | 3    | 25,4        | 1,000 | 6,4          | 0,250 | 27,9              | 1,1   | 9,5             | 0,375 | 95,3      | 3,75  | CR3460-000 |
| 7-1899668-4 | WPM-254097-10-9  | 10000              | 3    | 25,4        | 1,000 | 9,7          | 0,380 | 27,9              | 1,1   | 12,7            | 0,5   | 87,4      | 3,44  | CR3461-000 |
| 7-1899668-5 | WPM-254254-10-9  | 10000              | 3    | 25,4        | 1,000 | 25,4         | 1,000 | 27,9              | 1,1   | 28,6            | 1,125 | 87,4      | 3,44  | CR3463-000 |
| 7-1899668-6 | WPM-318064-10-9  | 10000              | 1    | 31,8        | 1,250 | 6,4          | 0,250 | N/A               | N/A   | 9,5             | 0,375 | 37,9      | 1,49  | CR3464-000 |
| 7-1899668-7 | WPM-318097-10-9  | 10000              | 1    | 31,8        | 1,250 | 9,7          | 0,380 | N/A               | N/A   | 12,7            | 0,5   | 37,9      | 1,49  | CR3465-000 |
| 7-1899668-8 | WPM-381064-10-9  | 10000              | 1    | 38,1        | 1,500 | 6,4          | 0,250 | N/A               | N/A   | 9,5             | 0,375 | 44,5      | 1,75  | CR3466-000 |
| 7-1899668-9 | WPM-381127-5-9   | 5000               | 2    | 38,1        | 1,500 | 12,7         | 0,500 | 44,2              | 1,74  | 15,9            | 0,625 | 88,2      | 3,47  | CR3467-000 |
| 8-1899668-0 | WPM-381191-5-9   | 5000               | 2    | 38,1        | 1,500 | 19,1         | 0,750 | 43,2              | 1,7   | 22,2            | 0,875 | 87,6      | 3,45  | CR3468-000 |
| 8-1899668-1 | WPM-445102-5-9   | 5000               | 1    | 44,5        | 1,750 | 10,2         | 0,400 | N/A               | N/A   | 12,7            | 0,5   | 50,4      | 1,986 | CR3469-000 |
| 8-1899668-2 | WPM-478175-5-9   | 5000               | 1    | 47,8        | 1,880 | 17,5         | 0,690 | N/A               | N/A   | 24,4            | 0,962 | 66        | 2,6   | CR3470-000 |
| 8-1899668-3 | WPM-508064-10-9  | 10000              | 1    | 50,8        | 2,000 | 6,4          | 0,250 | N/A               | N/A   | 9,5             | 0,375 | 56,9      | 2,24  | CR3471-000 |
| 8-1899668-4 | WPM-508095-5-9   | 5000               | 1    | 50,8        | 2,000 | 9,5          | 0,375 | N/A               | N/A   | 12,7            | 0,5   | 57,2      | 2,25  | CR3472-000 |
| 8-1899668-5 | WPM-508127-5-9   | 5000               | 1    | 50,8        | 2,000 | 12,7         | 0,500 | N/A               | N/A   | 15,9            | 0,625 | 56,9      | 2,24  | CR3473-000 |
| 8-1899668-6 | WPM-508254-5-9   | 5000               | 1    | 50,8        | 2,000 | 25,4         | 1,000 | N/A               | N/A   | 28,6            | 1,125 | 57,2      | 2,25  | CR3474-000 |
| 8-1899668-7 | WPM-508318-2.5-9 | 2500               | 1    | 50,8        | 2,000 | 31,8         | 1,250 | N/A               | N/A   | 34,9            | 1,375 | 56,9      | 2,24  | CR3475-000 |
| 8-1899668-8 | WPM-523841-1.5-9 | 1500               | 1    | 52,3        | 2,060 | 84,1         | 3,310 | N/A               | N/A   | 88,9            | 3,5   | 58,2      | 2,29  | CR3476-000 |
| 8-1899668-9 | WPM-699191-5-9   | 5000               | 1    | 69,9        | 2,750 | 19,1         | 0,750 | N/A               | N/A   | 23,3            | 0,917 | 76,2      | 3     | CR3477-000 |
| 9-1899668-0 | WPM-699254-5-9   | 5000               | 1    | 69,9        | 2,750 | 25,4         | 1,000 | N/A               | N/A   | 28,6            | 1,125 | 76,2      | 3     | CR3478-000 |
| 9-1899668-1 | WPM-762127-1-9   | 1000               | 1    | 76,2        | 3,000 | 127,0        | 5,000 | N/A               | N/A   | 129,5           | 5,1   | 79,4      | 3,13  | CR3479-000 |
| 9-1899668-2 | WPM-762254-5-9   | 5000               | 1    | 76,2        | 3,000 | 25,4         | 1,000 | N/A               | N/A   | 28,6            | 1,125 | 82,3      | 3,24  | CR3480-000 |
| 9-1899668-3 | WPM-762508-2.5-9 | 2500               | 1    | 76,2        | 3,000 | 50,8         | 2,000 | N/A               | N/A   | 54              | 2,125 | 82,6      | 3,24  | CR3481-000 |

PART NUMBERING SYSTEM

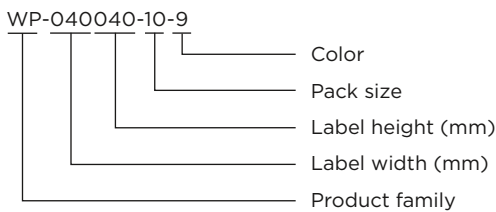

[te.com/products/identification-labeling](http://te.com/products/identification-labeling)





Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



#### Как с нами связаться

**Телефон:** 8 (812) 309 58 32 (многоканальный)

**Факс:** 8 (812) 320-02-42

**Электронная почта:** [org@eplast1.ru](mailto:org@eplast1.ru)

**Адрес:** 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.