4




This document is the property of and embodies  
CONFIDENTIAL and PROPRIETARY information of FCI.  
No part of the information shown on this  
document may be used in any way or disclosed  
to others without the written consent of FCI.  
Copyright FCI.

| PIN NO. | DIM A<br>MATING<br>LENGTH | DIM B<br>TAIL<br>LENGTH | PCB THICKNESS RANGE<br>ACCOMMODATED BY<br>PIN'S TAIL LENGTH |
|---------|---------------------------|-------------------------|-------------------------------------------------------------|
|         |                           |                         | ROWS A,B,C,D,E,F,G&H                                        |
| 01*     | 5.00                      | 4.30                    | 1.60 MIN                                                    |
| 54      |                           | 11.55                   | 1.60 - 3.15                                                 |
| 22      |                           | 12.20                   | 2.95 - 3.80                                                 |
| 30      |                           | 12.95                   | 2.95 - 4.55                                                 |
| 05      |                           | 13.70                   | 2.95 - 5.30                                                 |
| 35      |                           | 14.45                   | 3.05 - 6.05                                                 |
| 48      |                           | 15.20                   | 3.80 - 6.80                                                 |
| 40      |                           | 15.70                   | 4.30 - 7.30                                                 |
| 65      |                           | 16.40                   | 5.00 - 8.00                                                 |
| 09      |                           | 17.10                   | 5.70 - 8.70                                                 |
| 02*     | 5.75                      | 4.30                    | 1.60 MIN                                                    |
| 55      |                           | 11.55                   | 1.60 - 3.15                                                 |
| 44      |                           | 12.20                   | 2.95 - 3.80                                                 |
| 31      |                           | 12.95                   | 2.95 - 4.55                                                 |
| 06      |                           | 13.70                   | 2.95 - 5.30                                                 |
| 36      |                           | 14.45                   | 3.05 - 6.05                                                 |
| 49      |                           | 15.20                   | 3.80 - 6.80                                                 |
| 25      |                           | 15.70                   | 4.30 - 7.30                                                 |
| 66      |                           | 16.40                   | 5.00 - 8.00                                                 |
| 10      |                           | 17.10                   | 5.70 - 8.70                                                 |
| 03*     | 6.50                      | 4.30                    | 1.60 MIN                                                    |
| 56      |                           | 11.55                   | 1.60 - 3.15                                                 |
| 45      |                           | 12.20                   | 2.95 - 3.80                                                 |
| 32      |                           | 12.95                   | 2.95 - 4.55                                                 |
| 07      |                           | 13.70                   | 2.95 - 5.30                                                 |
| 37      |                           | 14.45                   | 3.05 - 6.05                                                 |
| 50      |                           | 15.20                   | 3.80 - 6.80                                                 |
| 41      |                           | 15.70                   | 4.30 - 7.30                                                 |
| 24      |                           | 16.40                   | 5.00 - 8.00                                                 |
| 11      |                           | 17.10                   | 5.70 - 8.70                                                 |

\* STUB PINS - NO REAR PLUG-UP

| PIN NO. | DIM A<br>MATING<br>LENGTH | DIM B<br>TAIL<br>LENGTH | PCB THICKNESS RANGE<br>ACCOMMODATED BY<br>PIN'S TAIL LENGTH |
|---------|---------------------------|-------------------------|-------------------------------------------------------------|
|         |                           |                         | ROWS A,B,C,D,E,F,G&H                                        |
| 04*     | 7.25                      | 4.30                    | 1.60 MIN                                                    |
| 57      |                           | 11.55                   | 1.60 - 3.15                                                 |
| 46      |                           | 12.20                   | 2.95 - 3.80                                                 |
| 33      |                           | 12.95                   | 2.95 - 4.55                                                 |
| 08      |                           | 13.70                   | 2.95 - 5.30                                                 |
| 38      |                           | 14.45                   | 3.05 - 6.05                                                 |
| 51      |                           | 15.20                   | 3.80 - 6.80                                                 |
| 42      |                           | 15.70                   | 4.30 - 7.30                                                 |
| 67      |                           | 16.40                   | 5.00 - 8.00                                                 |
| 12      |                           | 17.10                   | 5.70 - 8.70                                                 |
| 19*     | 8.00                      | 4.30                    | 1.60 MIN                                                    |
| 58      |                           | 11.55                   | 1.60 - 3.15                                                 |
| 47      |                           | 12.20                   | 2.95 - 3.80                                                 |
| 34      |                           | 12.95                   | 2.95 - 4.55                                                 |
| 20      |                           | 13.70                   | 2.95 - 5.30                                                 |
| 39      |                           | 14.45                   | 3.05 - 6.05                                                 |
| 52      |                           | 15.20                   | 3.80 - 6.80                                                 |
| 43      |                           | 15.70                   | 4.30 - 7.30                                                 |
| 68      |                           | 16.40                   | 5.00 - 8.00                                                 |
| 21      |                           | 17.10                   | 5.70 - 8.70                                                 |


|                          |         |                |      |                                          |             |            |                                                                                                     |              |                                                                                                          |  |      |
|--------------------------|---------|----------------|------|------------------------------------------|-------------|------------|-----------------------------------------------------------------------------------------------------|--------------|----------------------------------------------------------------------------------------------------------|--|------|
| mat'l code<br>SEE NOTE 3 |         |                |      | tolerances unless<br>otherwise specified |             |            | CUSTOMER                                                                                            |              |  www.fciconnect.com |  |      |
| ltr                      | ecn no. | dr             | date | linear                                   | 0.X ±0.3    |            | projection<br> | COPY         | title<br>VERTICAL SIGNAL HDR 8 ROW<br>P.F. 96 POS. SELECT LOAD EXT.                                      |  |      |
| P                        |         |                |      |                                          | 0.XX ±0.13  |            |                                                                                                     |              |                                                                                                          |  |      |
|                          |         |                |      |                                          | .XXX ±.051  |            |                                                                                                     |              |                                                                                                          |  |      |
|                          |         |                |      | angles                                   | 0° ±2°      |            |                | scale<br>1:1 | product family<br>METRAL                                                                                 |  | code |
|                          |         |                |      | dr                                       | E. KROPER.  | 2001-01-15 | 213                                                                                                 |              |                                                                                                          |  |      |
|                          |         |                |      | enrg                                     | J. VOLSTORF | 2001-01-15 | sheet                                                                                               |              |                                                                                                          |  |      |
|                          |         |                |      | chr                                      | J. VOLSTORF | 2001-01-15 | 2 of 5                                                                                              |              |                                                                                                          |  |      |
|                          |         |                |      | appd                                     | J. VOLSTORF | 2001-01-15 |                                                                                                     |              |                                                                                                          |  |      |
| sheet index              |         | revision sheet |      |                                          |             |            |                                                                                                     |              | cage code<br>22526                                                                                       |  |      |



PRODUCT NUMBER

SEE SHEET 1


DIM B  
DIM C



SHROUD  
(ORDER SEPERATELY)


REAR PLUG-UP

DIM B



STUB MOUNT

| PRESS-FIT HOLES                | OPTION 1                      |
|--------------------------------|-------------------------------|
| HOLE DIAMETER<br>AFTER PLATING | Ø 0.65-0.80                   |
| DRILLED HOLE                   | Ø 0.81-0.86<br>(Ø 0.85 DRILL) |
| COPPER PLATING                 | 0.025 MIN                     |
| SnPb PLATING                   | 0.005-0.015                   |

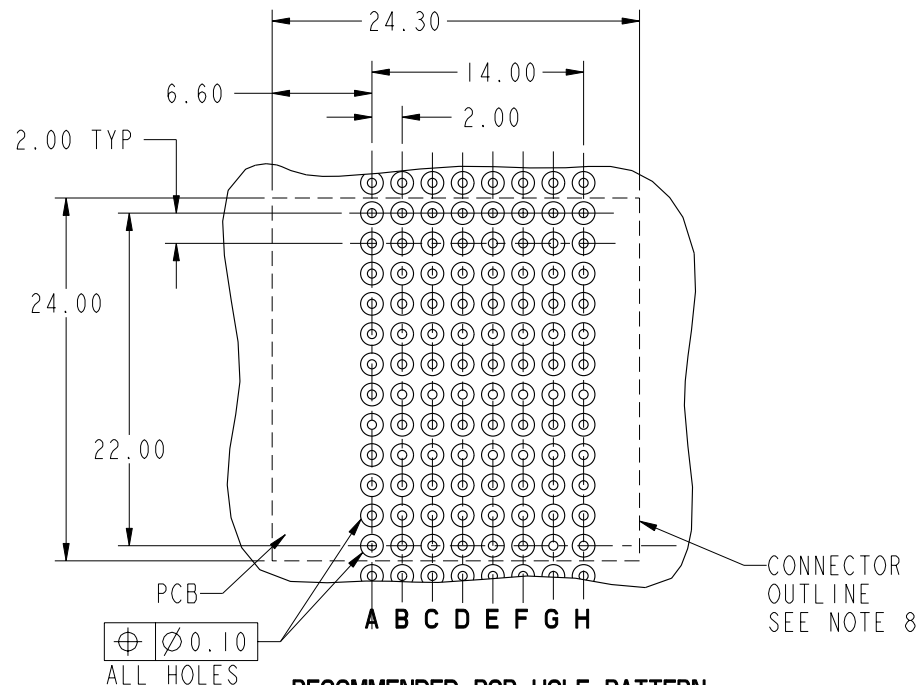

**RECOMMENDED PCB HOLE PATTERN**  
(COMPONENT SIDE)  
SEE PRINT 58351 FOR  
ADDITIONAL PCB INFORMATION

|                          |         |                   |      |                                          |             |            |            |                                                                                                         |                                                                                                             |        |        |                   |
|--------------------------|---------|-------------------|------|------------------------------------------|-------------|------------|------------|---------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------|--------|--------|-------------------|
| mat'l code<br>SEE NOTE 3 |         |                   |      | tolerances unless<br>otherwise specified |             |            | CUSTOMER   |                                                                                                         | <br>www.fciconnect.com |        |        |                   |
| ltr                      | ecn no. | dr                | date | linear                                   | 0.X ± 0.3   |            |            | projection<br>     | title<br>VERTICAL SIGNAL HDR 8 ROW<br>P.F. 96 POS. SELECT LOAD EXT                                          |        |        |                   |
| P                        |         |                   |      |                                          | 0.XX ± 0.13 |            |            |                                                                                                         |                                                                                                             |        |        |                   |
|                          |         |                   |      |                                          | .XXX ± .051 |            |            |                                                                                                         |                                                                                                             |        |        |                   |
|                          |         |                   |      | angles                                   | 0° ± 2°     |            |            | <br>scale<br>1 : 1 | product family                                                                                              |        | METRAL | code              |
|                          |         |                   |      |                                          | dr          | E. KROPER. | 2001-01-15 |                                                                                                         | size                                                                                                        | dwg no | 84965  | 213<br>sheet<br>3 |
|                          |         |                   |      | enrg                                     | J. VOLSTORF | 2001-01-15 |            |                                                                                                         |                                                                                                             |        |        |                   |
|                          |         |                   |      | chr                                      | J. VOLSTORF | 2001-01-15 |            |                                                                                                         |                                                                                                             |        |        |                   |
|                          |         |                   |      | appd                                     | J. VOLSTORF | 2001-01-15 |            |                                                                                                         |                                                                                                             |        |        |                   |
| sheet<br>index           |         | revision<br>sheet |      |                                          |             |            |            |                                                                                                         |                                                                                                             |        |        |                   |

cage code 22526

Pro/E

3

4

PDM: Rev:P

STATUS: Released

Printed: May 13, 2011



| SELECT LOAD PATTERNS                               |     |              |    |    |    |    |    |    |    |    |    |    |    |
|----------------------------------------------------|-----|--------------|----|----|----|----|----|----|----|----|----|----|----|
| PRODUCT #                                          | ROW | CONTACT CODE |    |    |    |    |    |    |    |    |    |    |    |
|                                                    |     | 1            | 2  | 3  | 4  | 5  | 6  | 7  | 8  | 9  | 10 | 11 | 12 |
| 84965-X02001<br>SEE NOTE 13<br>LEAD FREE<br>OPTION | H   | -            | -  | -  | -  | -  | -  | -  | -  | -  | -  | -  | -  |
|                                                    | G   | -            | -  | -  | -  | -  | -  | -  | -  | -  | -  | -  | -  |
|                                                    | F   | 02           | 02 | 02 | 02 | 02 | 02 | 02 | 02 | 02 | 02 | 02 | 02 |
|                                                    | E   | 02           | 02 | 02 | 02 | 02 | 02 | 02 | 02 | 02 | 02 | 02 | 02 |
|                                                    | D   | 02           | 02 | 02 | 02 | 02 | 02 | 02 | 02 | 02 | 02 | 02 | 02 |
|                                                    | C   | 02           | 02 | 02 | 02 | 02 | 02 | 02 | 02 | 02 | 02 | 02 | 02 |
|                                                    | B   | 02           | 02 | 02 | 02 | 02 | 02 | 02 | 02 | 02 | 02 | 02 | 02 |
|                                                    | A   | 02           | 02 | 02 | 02 | 02 | 02 | 02 | 02 | 02 | 02 | 02 | 02 |
|                                                    | GND | -            | -  | -  | -  | -  | -  | -  | -  | -  | -  | -  | -  |
| PRODUCT #                                          | ROW | CONTACT CODE |    |    |    |    |    |    |    |    |    |    |    |
|                                                    |     | 1            | 2  | 3  | 4  | 5  | 6  | 7  | 8  | 9  | 10 | 11 | 12 |
| 84965-X02002<br>SEE NOTE 13<br>LEAD FREE<br>OPTION | H   | -            | -  | -  | -  | -  | -  | -  | -  | -  | -  | -  | -  |
|                                                    | G   | -            | -  | -  | -  | -  | -  | -  | -  | -  | -  | -  | -  |
|                                                    | F   | -            | -  | -  | -  | -  | -  | -  | -  | -  | -  | -  | -  |
|                                                    | E   | 02           | 02 | 02 | 02 | 02 | 02 | 02 | 02 | 02 | 02 | 04 | 04 |
|                                                    | D   | 02           | 02 | 02 | 02 | 02 | 02 | 02 | 02 | 02 | 02 | 04 | 04 |
|                                                    | C   | 02           | 02 | 02 | 02 | 02 | 02 | 02 | 02 | 02 | 02 | 19 | 19 |
|                                                    | B   | 02           | 02 | 02 | 02 | 02 | 02 | 02 | 02 | 02 | 02 | 19 | 19 |
|                                                    | A   | 02           | 02 | 02 | 02 | 02 | 02 | 02 | 02 | 02 | 02 | 19 | 19 |
|                                                    | GND | -            | -  | -  | -  | -  | -  | -  | -  | -  | -  | -  | -  |
| PRODUCT #                                          | ROW | CONTACT CODE |    |    |    |    |    |    |    |    |    |    |    |
|                                                    |     | 1            | 2  | 3  | 4  | 5  | 6  | 7  | 8  | 9  | 10 | 11 | 12 |
| 84965-X02003<br>SEE NOTE 13<br>LEAD FREE<br>OPTION | H   | -            | -  | -  | -  | -  | -  | -  | -  | -  | -  | -  | -  |
|                                                    | G   | -            | -  | -  | -  | -  | -  | -  | -  | -  | -  | -  | -  |
|                                                    | F   | -            | -  | -  | -  | -  | -  | -  | -  | -  | -  | -  | -  |
|                                                    | E   | 02           | 02 | 02 | 02 | 02 | 02 | 02 | 02 | 02 | 02 | 02 | 02 |
|                                                    | D   | 02           | 02 | 02 | 02 | 02 | 02 | 02 | 02 | 02 | 02 | 02 | 02 |
|                                                    | C   | 02           | 02 | 02 | 02 | 02 | 02 | 02 | 02 | 02 | 02 | 02 | 02 |
|                                                    | B   | 02           | 02 | 02 | 02 | 02 | 02 | 02 | 02 | 02 | 02 | 02 | 02 |
|                                                    | A   | 02           | 02 | 02 | 02 | 02 | 02 | 02 | 02 | 02 | 02 | 02 | 02 |
|                                                    | GND | -            | -  | -  | -  | -  | -  | -  | -  | -  | -  | -  | -  |

| SELECT LOAD PATTERNS                               |     |              |    |    |    |    |    |    |    |    |    |    |    |
|----------------------------------------------------|-----|--------------|----|----|----|----|----|----|----|----|----|----|----|
| PRODUCT #                                          | ROW | CONTACT CODE |    |    |    |    |    |    |    |    |    |    |    |
|                                                    |     | 1            | 2  | 3  | 4  | 5  | 6  | 7  | 8  | 9  | 10 | 11 | 12 |
| 84965-X02004<br>SEE NOTE 13<br>LEAD FREE<br>OPTION | H   | -            | -  | -  | -  | -  | -  | -  | -  | -  | -  | -  | -  |
|                                                    | G   | -            | -  | -  | -  | -  | -  | -  | -  | -  | -  | -  | -  |
|                                                    | F   | 02           | 02 | 02 | 02 | 02 | 02 | 02 | 02 | 02 | 02 | 02 | 02 |
|                                                    | E   | 02           | 02 | 02 | 02 | 02 | 02 | 02 | 02 | 02 | 02 | 04 | 04 |
|                                                    | D   | 02           | 02 | 02 | 02 | 02 | 02 | 02 | 02 | 02 | 02 | 04 | 04 |
|                                                    | C   | 02           | 02 | 02 | 02 | 02 | 02 | 02 | 02 | 02 | 02 | 02 | 02 |
|                                                    | B   | 02           | 02 | 02 | 02 | 02 | 02 | 02 | 02 | 02 | 02 | 19 | 19 |
|                                                    | A   | 02           | 02 | 02 | 02 | 02 | 02 | 02 | 02 | 02 | 02 | 19 | 19 |
|                                                    | GND | -            | -  | -  | -  | -  | -  | -  | -  | -  | -  | -  | -  |
| PRODUCT #                                          | ROW | CONTACT CODE |    |    |    |    |    |    |    |    |    |    |    |
|                                                    |     | 1            | 2  | 3  | 4  | 5  | 6  | 7  | 8  | 9  | 10 | 11 | 12 |
| 84965-X02005<br>SEE NOTE 13<br>LEAD FREE<br>OPTION | H   | -            | -  | -  | -  | -  | -  | -  | -  | -  | -  | -  | -  |
|                                                    | G   | -            | -  | -  | -  | -  | -  | -  | -  | -  | -  | -  | -  |
|                                                    | F   | -            | -  | -  | -  | -  | -  | -  | -  | -  | -  | -  | -  |
|                                                    | E   | 02           | 02 | 02 | 02 | 02 | 02 | 02 | 02 | 02 | 02 | 02 | 02 |
|                                                    | D   | 02           | 02 | 02 | 02 | 02 | 02 | 02 | 02 | 02 | 02 | 02 | 02 |
|                                                    | C   | 02           | 02 | 02 | 02 | 02 | 02 | 02 | 02 | 02 | 02 | 02 | 19 |
|                                                    | B   | 02           | 02 | 02 | 02 | 02 | 02 | 02 | 02 | 02 | 02 | 02 | 02 |
|                                                    | A   | 02           | 02 | 02 | 02 | 02 | 02 | 02 | 02 | 02 | 02 | 02 | 19 |
|                                                    | GND | -            | -  | -  | -  | -  | -  | -  | -  | -  | -  | -  | -  |
| PRODUCT #                                          | ROW | CONTACT CODE |    |    |    |    |    |    |    |    |    |    |    |
|                                                    |     | 1            | 2  | 3  | 4  | 5  | 6  | 7  | 8  | 9  | 10 | 11 | 12 |
| 84965-X02006<br>SEE NOTE 13<br>LEAD FREE<br>OPTION | H   | -            | -  | -  | -  | -  | -  | -  | -  | -  | -  | -  | -  |
|                                                    | G   | -            | -  | -  | -  | -  | -  | -  | -  | -  | -  | -  | -  |
|                                                    | F   | 02           | 02 | 02 | 02 | 02 | 02 | 02 | 02 | 02 | 02 | 02 | 02 |
|                                                    | E   | 02           | 02 | 02 | 02 | 02 | 02 | 02 | 02 | 19 | 02 | 02 | 19 |
|                                                    | D   | 02           | 02 | 02 | 02 | 02 | 02 | 02 | 02 | 02 | 02 | 02 | 02 |
|                                                    | C   | 02           | 02 | 02 | 02 | 02 | 02 | 02 | 02 | 02 | 02 | 02 | 02 |
|                                                    | B   | 02           | 02 | 02 | 02 | 02 | 02 | 02 | 02 | 02 | 02 | 02 | 02 |
|                                                    | A   | 02           | 02 | 02 | 02 | 02 | 02 | 02 | 02 | 02 | 02 | 02 | 02 |
|                                                    | GND | -            | -  | -  | -  | -  | -  | -  | -  | -  | -  | -  | -  |

|                          |                   |    |      |                                          |             |            |              |  |                                                                     |  |
|--------------------------|-------------------|----|------|------------------------------------------|-------------|------------|--------------|--|---------------------------------------------------------------------|--|
| mat'l code<br>SEE NOTE 3 |                   |    |      | tolerances unless<br>otherwise specified |             |            | CUSTOMER     |  | FCI<br>www.fciconnect.com                                           |  |
| ltr                      | ecr no.           | dr | date | linear                                   | 0.X ±0.3    |            | COPY         |  |                                                                     |  |
| P                        |                   |    |      |                                          | 0.XX ±0.13  |            | projection   |  |                                                                     |  |
|                          |                   |    |      |                                          | .XXX ±.051  |            |              |  |                                                                     |  |
|                          |                   |    |      | angles                                   | 0° ±2°      |            |              |  | title<br>VERTICAL SIGNAL HDR 8 ROW<br>P.F. 96 POS. SELECT LOAD EXT. |  |
|                          |                   |    |      | dr                                       | E. KROPER.  | 2001-01-15 | MM           |  | product family<br>METRAL                                            |  |
|                          |                   |    |      | enrg                                     | J. VOLSTORF | 2001-01-15 | scale<br>1:1 |  | code<br>213                                                         |  |
|                          |                   |    |      | chr                                      | J. VOLSTORF | 2001-01-15 |              |  | sheet<br>4                                                          |  |
|                          |                   |    |      | appd                                     | J. VOLSTORF | 2001-01-15 |              |  |                                                                     |  |
| sheet<br>index           | revision<br>sheet |    |      |                                          |             |            |              |  |                                                                     |  |



PRODUCT NUMBER

SEE SHEET 1



NOTES:

1. SEE APPLICATION SPECIFICATION GS-20-010 FOR INFORMATION ON AVAILABLE TOOLING, CIRCUIT BOARD DESIGN CONSIDERATIONS, REPAIR PROCEDURES AND PRODUCT OFFERINGS.
2. UNLESS OTHERWISE SPECIFIED, ALL DIMENSIONS AND TOLERANCES ARE IN ACCORDANCE WITH ASME Y14.5M, 1994
3. HOUSING MATERIAL: LIQUID CRYSTAL POLYMER, 30% GLASS FILLED, FLAME RETARDANT PER UL 94-V0. PIN MATERIAL: PHOSPHOR BRONZE
4. PLATING ON CONTACT AREAS PER PERFORMANCE LEVELS SHOWN IN TABLE ON SHEET 1. PLATING ON "LF" TAILS IS Sn ONLY. PLATING ON ALL OTHER TAILS IS SnPb.
5. DIMENSIONAL RESTRICTIONS OF PINS IN HEADERS.  
 DIM A : 5.0mm MIN, 8.0mm MAX FOR ROWS A-H  
 DIM C : 5.0mm MIN, 8.0mm MAX FOR ROWS A-H
6. THE MIN PCB THICKNESS FOR REAR PLUG-UP APPLICATIONS IS 1.6mm
7. USE SHROUD 98173-102 FOR REAR PLUG-UP APPLICATIONS.
8. THE 'CONNECTOR OUTLINE' IS THE MIN OUTLINE REQUIRED. TO DETERMINE THE OUTLINE NECESSARY TO PERMIT THE VARIOUS TYPES OF REPAIR OPERATIONS, SEE APPLICATION SPECIFICATION GS-20-010.

9. CURRENT RATING : 1 AMP PER PIN
10. TEMPERATURE RANGE : -55°C TO +105°C
11. P/N 84965-X02ZZZLF



12. PRODUCTS WHERE THE PART NUMBER ENDS IN "LF" MEET EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY REGULATIONS AS DESCRIBED IN GS-22-008. ALL PRODUCTS WILL WITHSTAND EXPOSURE TO 260°C FOR 60 SECONDS IN A CONVECTION, INFRA-RED OR VAPOR PHASE REFLOW OVEN.
13. FOR LEAD FREE PART NUMBERS ADD "LF" SUFFIX. EXAMPLE: 84965-X02ZZZLF
14. PIN TYPE IS AT THE MANUFACTURERS OPTION AND CAN BE EITHER BABY-H OR EYE OF THE NEEDLE STYLE

|                       |         |                |      |                                       |             |            |                                                                                                     |                                                                                                          |        |        |       |
|-----------------------|---------|----------------|------|---------------------------------------|-------------|------------|-----------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------|--------|--------|-------|
| mat'l code SEE NOTE 3 |         |                |      | tolerances unless otherwise specified |             | CUSTOMER   |                                                                                                     |  www.fciconnect.com |        |        |       |
| ltr                   | ecr no. | dr             | date | linear                                | 0.X ±0.3    |            | projection<br> | title<br>VERTICAL SIGNAL HDR 8 ROW<br>P.F. 96 POS. SELECT LOAD EXT                                       |        |        |       |
| P                     |         |                |      |                                       | 0.XX ±0.13  |            |                                                                                                     |                                                                                                          |        |        |       |
|                       |         |                |      |                                       | .XXX ±.051  |            |                                                                                                     |                                                                                                          |        |        |       |
|                       |         |                |      | angles                                | 0° ±2°      |            | <br>scale 1:1  | product family                                                                                           |        | METRAL | code  |
|                       |         |                |      | dr                                    | E. KROPER.  | 2001-01-15 |                                                                                                     | size                                                                                                     | dwg no | 84965  | 213   |
|                       |         |                |      | enr                                   | J. VOLSTORF | 2001-01-15 |                                                                                                     |                                                                                                          |        |        |       |
|                       |         |                |      | chr                                   | J. VOLSTORF | 2001-01-15 |                                                                                                     |                                                                                                          |        |        |       |
|                       |         |                |      | appd                                  | J. VOLSTORF | 2001-01-15 |                                                                                                     | A                                                                                                        |        |        | sheet |
| sheet index           |         | revision sheet |      |                                       |             |            |                                                                                                     |                                                                                                          |        |        |       |

cage code 22526

Pro/E

3

4

PDM: Rev:P

STATUS: Released

Printed: May 13, 2011



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



#### Как с нами связаться

**Телефон:** 8 (812) 309 58 32 (многоканальный)

**Факс:** 8 (812) 320-02-42

**Электронная почта:** [org@eplast1.ru](mailto:org@eplast1.ru)

**Адрес:** 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.