



FCIconnect.com


Copyright FCI

PRODUCT NUMBER
XXXXX-YYYHPLF


- LEAD FREE OPTION
SEE NOTE 1,13
- SPECIAL OPTIONS
SEE NOTE 1 OR 10
- HIGH TEMPERATURE PLASTIC
SEE NOTE 1
- NO OF
POSITIONS
SEE NOTE 1
- PIN PLATING
SEE SHEET 2
- BASE PART NO.

67996-X XX-XXX XXX LF

- TAIL LENGTH (EXAMPLE BELOW)
3.0mm=030 12.8mm=128
(SEE NOTE 16 & 17)
- MATING LENGTH (EXAMPLE BELOW)
5.0mm=050 25.5mm=255
(SEE NOTE 16 & 17)
- TOTAL NUMBER OF POSITIONS
FROM 2 (2X1) THRU 72 (2X36) POS.
- PIN PLATING (SEE NOTE 14)
1=0.76µm Au
4= PURE TIN
8=0.36µm Au
- BASE PART NO.
DOUBLE ROW

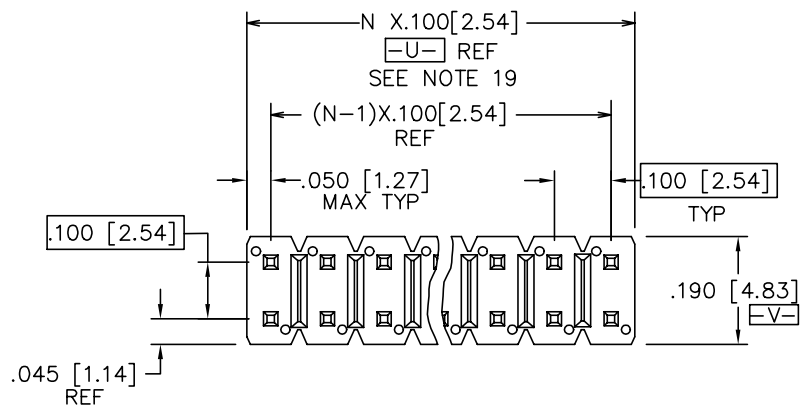


TOP VIEW

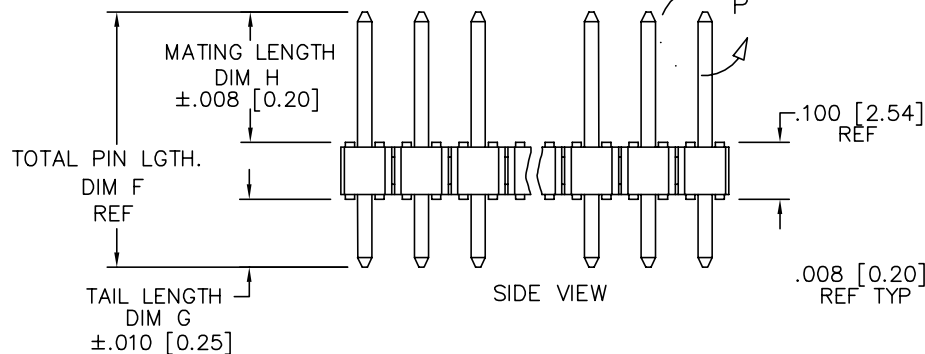


SIDE VIEW

END VIEW

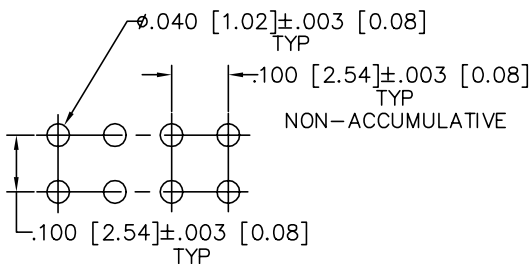

RECOMMENDED HOLE PATTERN

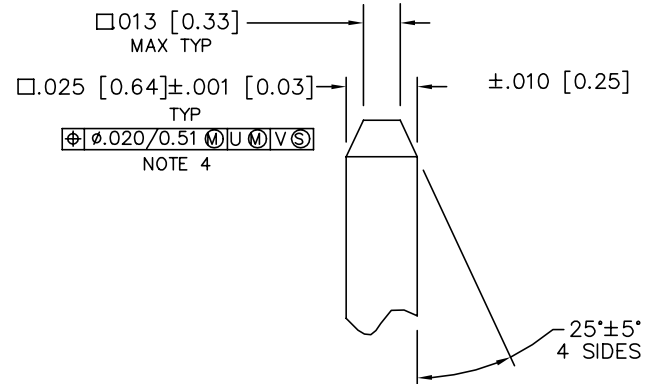

DETAIL P
SCALE 5:1
TYP BOTH ENDS

mat'l. code NOTE 2 & 3				surface ISO 1302 ✓		tolerance ISO 406 ISO 1101	projection ISO 1101	product family BERGSTIK			
ltr	ecn no	dr	date	tolerances unless otherwise specified				title			
DF	N11-0180	J.Z	2011-05-31	angles	linear	XX±01/XX±3	INCH/MM	BERGSTIK II HEADER D/R			
DG	ELX-N-13471	J.Z	2011-11-16			XXX±0.005/XXX±13		.100/2.54cc STRAIGHT			
DH	ELX-N-16105	ZK	2013-10-22	0°±2'		XXXX±0020/XXX±05	scale 2:1	dwg no			
				dr	T.BREWBAKER	12/21/94	FCI	sheet 1 of 8			
				enrg	T.HANNA	12/21/94		67996			
				chr	J.MURPHY	12/21/94		A3			
				appd	T.HANNA	12/21/94		type Product Customer Drawing			
sheet index	revision sheet	DH	...	DH	8						

PIN PLATING CODES:	
XXXX-1YY	30u"/0.76u MIN (SEE NOTE 14) OVER 50u"/1.27u MIN Ni
XXXX-2YY	15u"/0.38u MIN (SEE NOTE 14) OVER 50u"/1.27u MIN Ni
XXXX-3YY	50u"/1.27u MIN (SEE NOTE 14) OVER 50u"/1.27u MIN Ni
XXXX-4YY	100u"/2.54u MIN Sn OVER 50u"/1.27u MIN Ni (SEE NOTE 15)
XXXX-4YYHLF	
XXXX-5YY	15u"/0.38u MIN (SEE NOTE 14) OVER 50u"/1.27u MIN Ni
XXXX-6YY	30u"/0.76u MIN (SEE NOTE 14) OVER 50u"/1.27u MIN Ni
XXXX-7YY	30u"/0.76u MIN (SEE NOTE 14) OVER 50u"/1.27u MIN Ni
XXXX-8YY	15u"/0.38u MIN (SEE NOTE 14) OVER 50u"/1.27u MIN Ni
XXXX-9YY	15u"/0.38u MIN (SEE NOTE 14) OVER 50u"/1.27u MIN Ni
XXXX-0YY	30u"/0.76u MIN (SEE NOTE 14) OVER 50u"/1.27u MIN Ni

NOTES

1. PART NUMBER OPTIONS:
PIN PLATING CODES (SEE ABOVE)

HIGH TEMPERATURE MATERIAL:

PART NUMBERS WITH AND WITHOUT "H" WILL BE SUPPLIED WITH HIGH TEMPERATURE PLASTIC.

NUMBER OF POSITIONS :

EVEN NUMBER OF POSITIONS FROM 2 (2X1) THROUGH 72 (2X36).
-X00H INDICATES BERGSTRIIP PRODUCT. SEE PAGE 3
FOR SPECIAL GEOMETRY OF THIS CONTINUOUS STRIP PRODUCT.
AUTOMATED REELS WILL CONTAIN 45,000 PINS.
SEE SPECIFIC PART NUMBERS FOR AVAILABILITY.

PACKAGING:

PACKAGED IN POLY BAGS.
EIGHT DIGIT PART NUMBERS FOLLOWED BY A "T" ARE PACKAGED
IN TUBES. SEE SPECIFIC PART NUMBERS FOR AVAILABILITY.
EIGHT DIGIT PART NUMBERS FOLLOWED BY A "G" ARE PACKAGED
IN GPAX FOR IBM ONLY. SEE SPECIFIC PART NUMBERS FOR AVAILABILITY.
PART NUMBERS FOLLOWED BY A "C" ARE PACKAGED IN TUBES
WITH A PICKUP CAP APPLIED.
EIGHT DIGIT PART NUMBERS FOLLOWED BY A "A" ARE PACKAGED 
IN TAPE/REEL WITH PICKUP CAP P/N 95730-003 APPLIED, PER BUS-14-345.

LEAD FREE:

ADD "HLF" SUFFIX AT THE END OF PART NUMBER FOR LEAD FREE
OPTION, NOT AVAILABLE FOR -5YY,-5YYH, -6YY & -6YYH

2. BODY MATERIAL:

BODY MATERIAL : MANUFACTURER'S OPTION OF NYLON, PCT GLASS FIBER
REINFORCED OR MINERAL FILLED LCP FLAME RETARDENT PER UL-94V-0.
COLOR: BLACK

BERGSTRIIP™ PRODUCED WITH HIGH TEMPERATURE LCP
THERMOPLASTIC, FLAME RETARDENT PER UL-94V-0.
COLOR: BLACK

PART NUMBERS WITH "H" AND WITHOUT SUFFIX WILL WITHSTAND EXPOSURE
TO 260° C PEAK TEMPERATURE FOR 20 SECONDS IN
WAVE SOLDER, INFRA-RED OR VAPOR PHASE SOLDER PROCESS.

3. PIN MATERIAL: PHOS BRONZE.

4. MEASURED WITH PART IN RESTRAINED CONDITION.

5. TWO SIDES OF PIN TIPS NOT PLATED. TYPICAL BOTH ENDS.

6. 2LBS/0.9KG MIN PIN RETENTION IN EITHER DIRECTION.

7. MILITARY BERGSTIK HEADER
P/N XXXXX-XY-MIL
NOT AVAILABLE.

8. ±.010/0.25 TOL APPLIES TO ALL "G" TAILS EXCEPT
INDICATED PARTS ON TABLE WHERE +.010/0.25 -.000/0.00
APPLIES.

9. NOTCH CONFIGURATION WILL VARY PER VENDOR'S DISCRETION.

10. BERGSTRIIP™ PART NUMBERS FOLLOWED BY
BY A "B" ARE BULK PRICED.

11. TAIL LENGTH (DIM. G) TO BE ±.008/.020.

12. POSITIONS PER ROW 37 TO 50 CAN BE PRODUCED,
BUT FLATNESS AND CURVATURE MAY NOT BE
HELD AS CLOSE AS 36 POSITIONS.

13. THESE PRODUCTS MEETS EUROPEAN UNION DIRECTIVES AND OTHER
COUNTRY REGULATION AS DESCRIBED IN GS-22-008.

14. PLATING OPTIONS:
PERFORMANCE PLATING WILL BE EITHER GOLD OR GXT ON POST OR TAIL,
OPTIONALLY (78~295u"/2~7.5u) TIN ON TAIL.

15. "THIS PRODUCT HAS 100% TIN PLATING IN THE INTERFACE AND
HAS NOT BEEN TESTED FOR WHISKER GROWTH IN ALL INTERCONNECT
ENVIRONMENTS."

16. THE OAL DON'T EXCEED 34.5mm

17. INCREMENTS BY 0.1mm IN LENGTHS ONLY

18. FOR SPECIAL PACKAGING REQUEST PLEASE CONTACT PRODUCT MANAGER FOR AVAILABILITY

19. TO DETERMINE DIMENSIONS:
N=NUMBER OF POSITION PER ROW
EXAMPLE: 10 POS. N X .100/2.54

mat'l. code					surface			tolerance		projection		product family		
NOTE 2 & 3					ISO 1302 ✓			ISO 406				BERGSTIK		
ltr					tolerances unless otherwise specified			ISO 1101				title		
ecn no dr date					angles		linear		.XX±.01/.XX±.3		INCH/MM		BERGSTIK II HEADER D/R .100/2.54cc STRAIGHT	
DG									.XXX±0.005/.XXX±.13					
					0°±2°				.XXX±0.020/.XXX±.05		scale 2:1			
					dr		T.BREWBAKER		12/21/94				dwg no	
					enrg		T.HANNA		12/21/94				sheet 2 of 8	
					chr		J.MURPHY		12/21/94				size	
					appd		T.HANNA		12/21/94				A3	
sheet index		revision sheet										type Product Customer Drawing		



Copyright FCI

D

form: A3

1

2

3

4

5

6

1

2

3

4

5

6

1

2

3

4

5

6

1

2

3

4

5

6

1

2

3

4

5

6

1

2

3

4

5

6

1

2

3

4

5

6

1

2

3

4

5

6

1

2

3

4

5

6

1

2

3

4

5

6

1

2

3

4

5

6

1

2

3

4

5

6

1

2

3

4

5

6

1

2

3

4

5

6

1

2

3

4

5

6

1

2

3

4

5

6

1

2

3

4

5

6

1

2

3

4

5

6

1

2

3

4

5

6

1

2

3

4

5

6

1

2

3

4

5

6

1

2

3

4

5

6

1

2

3

4

5

6

1

2

3

4

5

6

1

2

3

4

5

6

1

2

3

4

5

6

1

2

3

4

5

6

1

2

3

4

5

6

1

2

3

4

5

6

1

2

3

4

5

6

1

2

3

4

5

6

1

2

3

4

5

6

1

2

3

4

5

6

1

2

3

4

5

6

1

2

3

4

5

6

1

2

3

4

5

6

1

2

3

4

5

6

1

2

3

4

5

6

1

2

3

4

5

6

1

2

3

4

5

6

1

2

3

4

5

6

1

2

3

4

5

6

1

2

3

4

5

6

1

2

3

4

5

6

1

2

3

4

5

6

1

2

3

4

5

6

1

2

3

4

5

6

1

2

3

4

5

6

1

2

3

4

5

6

1

2

3

4

5

6

1

2

3

4

5

6

1

2

3

4

5

6

1

2

3

4

5

6

1

2

3

4

5

6

1

2

3

4

5

6

1

2

3

4

5

6

1

2

3

4

5

6

1

2

3

4

5

6

1

2

3

4

5

6

1

2

3

4

5

6

1				2		3							4		5		6	
PRODUCT NUMBER	TOT. PIN LGTH.		TAIL LENGTH		MATING LENGTH						BERGSTRIPTM	LF OPTION						
	DIM F	DIM F	DIM G	DIM G	DIM H	DIM H	PACKAGING		NOTES	AVAILABLE								
	ENGLISH	METRIC	ENGLISH	METRIC	ENGLISH	METRIC												
69132-XXX	0.760	19.30	0.120	3.05	0.540	13.72	POLY BAGS/TUBES		---	---	NO	OB NOTE 1,13						
69133-XXX	0.615	15.62	0.285	7.24	0.230	5.84	POLY BAGS		-	NO								
69157-XXX	0.410	10.41	0.110	2.79	0.200	5.08	POLY BAGS		-	NO								
71217-XXYH	1.000	25.40	0.450	11.43	0.450	11.43	POLY BAGS		---	---	NO							OB
71222-XXYH	0.850	21.59	0.250	6.35	0.500	12.70	POLY BAGS		---	---	NO							OB
72273-XXYH	0.725	18.42	0.110	2.79	0.515	13.08	POLY BAGS		---	---	NO							OB
72448-XXYH	0.658	16.71	0.172	4.37	0.386	9.80	POLY BAGS		---	---	NO							OB
72455-XXYH	0.598	15.19	0.180	4.57	0.318	8.08	POLY BAGS		---	---	NO							OB
72455-632HG	0.598	15.19	0.180	4.57	0.318	8.08	GPAX		NOTE 1	NO	OB							
73503-XXYH	0.420	10.67	0.120	3.05	0.200	5.08	POLY BAGS		---	---	NO							OB
73596-XXYH	0.795	20.19	0.110	2.79	0.585	14.86	POLY BAGS		---	---	NO							OB
74317-XXYH	0.532	13.51	0.309	7.85	0.123	3.12	POLY BAGS		---	---	NO							OB
74318-XXYH	0.592	15.04	0.369	9.37	0.123	3.12	POLY BAGS		---	---	NO							OB
74999-XXYH	0.508	12.90	0.090	2.29	0.318	8.08	POLY BAGS		---	---	NO							OB
78212-XXX	0.710	18.03	0.350	8.89	0.260	6.60	POLY BAGS		---	---	NO							OB
78233-XXX	0.568	14.43	0.150	3.81	0.318	8.08	POLY BAGS		-	NO								
78269-XXX	0.385	9.78	0.095	2.41	0.190	4.83	POLY BAGS		---	---	NO							OB
78286-XXX	0.500	12.70	0.160	4.06	0.240	6.10	POLY BAGS/TUBES		---	---	NO							OB
78932-XXX	UNAVAILABLE		UNAVAILABLE		UNAVAILABLE				-	-								
78933-XXX	0.695	17.65	0.285	7.24	0.310	7.87	POLY BAGS		---	---	NO							OB
78988-XXX	0.540	13.72	0.135	3.43	0.305	7.75	POLY BAGS		---	---	NO	OB						
78989-XXX	UNAVAILABLE		UNAVAILABLE		UNAVAILABLE				-	-								
78990-XXX	UNAVAILABLE		UNAVAILABLE		UNAVAILABLE				-	-								
78991-XXX	UNAVAILABLE		UNAVAILABLE		UNAVAILABLE				-	-								
78992-XXX	UNAVAILABLE		UNAVAILABLE		UNAVAILABLE				-	-								
78993-XXX	UNAVAILABLE		UNAVAILABLE		UNAVAILABLE				-	-								
78994-XXX	UNAVAILABLE		UNAVAILABLE		UNAVAILABLE				-	-	NOTE 1,13							

mat'l. code				surface		tolerance		projection		product family			
NOTE 2 & 3				ISO 1302		ISO 406				BERGSTIK			
ltr	ecn	no	dr	date		tolerances unless otherwise specified				title			
DH						linear		INCH/MM		BERGSTIK II HEADER D/R			
						0'±2"		scale 2:1		.100/2.54cc STRAIGHT			
						dr		T.BREWBAKER		12/21/94		dwg no	
						engr		T.HANNA		12/21/94		sheet 5 of 8	
						chr		J.MURPHY		12/21/94		size	
						appd		T.HANNA		12/21/94		A3	
sheet index		revision sheet										type	
												Product Customer Drawing	



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.