


PRODUCT NUMBER

88902-XXX

88902-XXYLF

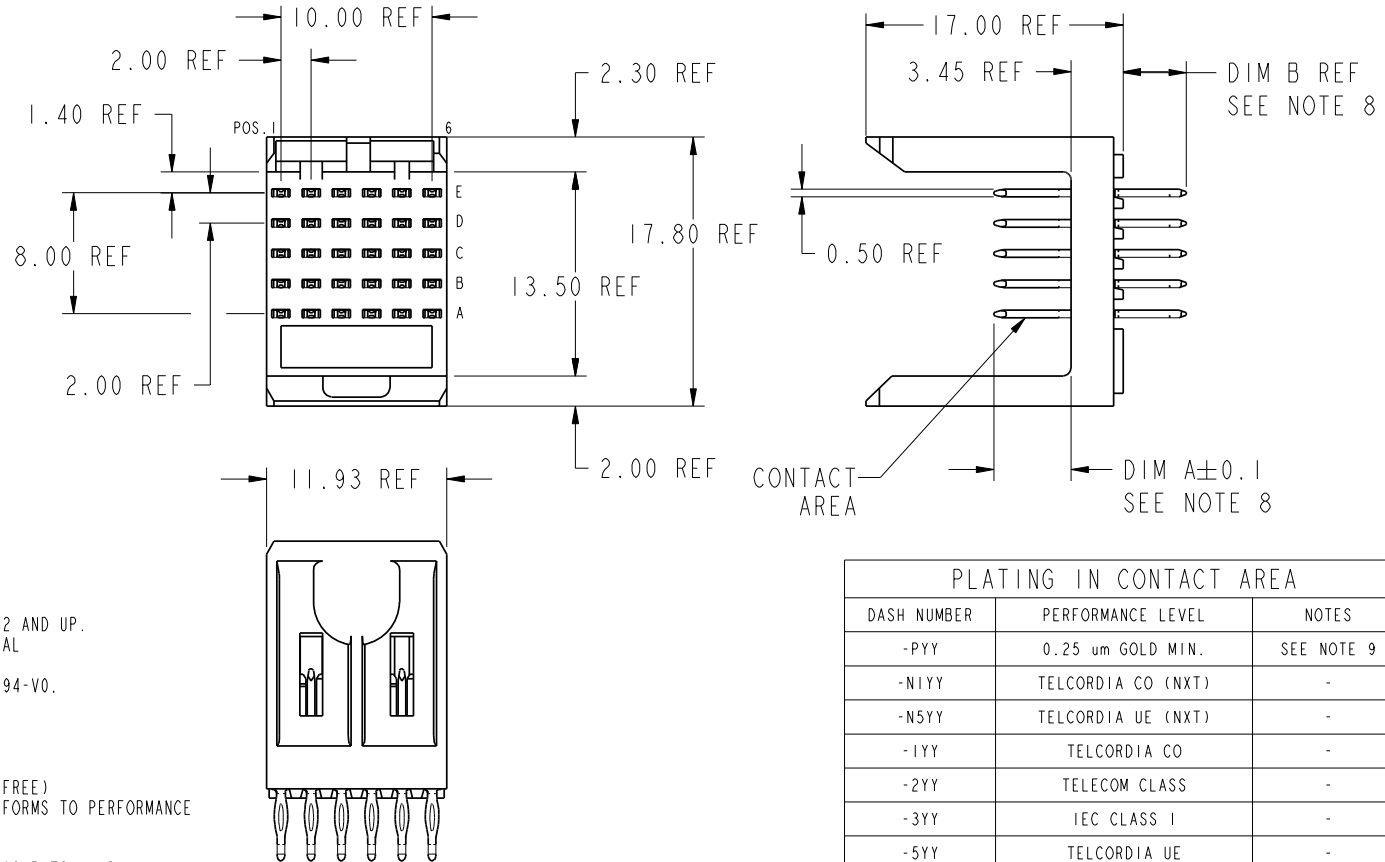

NOTES:

- FOR DIM A, AND B SEE SHEET 2 AND UP.
- BODY MATERIAL: LIQUID CRYSTAL POLYMER 30 % GLASS. FLAME RETARDANT ACC. UL 94-V0.
- PIN MATERIAL: PHOSPHOR BRONZE
- PLATING ON PRESS-FIT TAIL:
 88902-XXX IS SnPb
 88902-XXYLF IS Sn (LEAD FREE)
 PLATING ON CONTACT AREA CONFORMS TO PERFORMANCE LEVEL SHOWN IN TABLE BELOW.
- PRODUCT MARKING:
 PART NUMBER DESIGNATION J & BATCH I.D.
- ALL PRODUCTS WITH PART NUMBERS SHOWN IN SUBSEQUENT TABLES WILL BE PACKAGED IN TUBES. IF TRAY PACKAGING IS REQUIRED, SUFFIX "P" WILL BE ADDED TO THE END OF THE PART NUMBER. EXAMPLE: XXXXX-XXPP OR XXXXX-XXXP
- PRODUCT SPECIFICATION: GS-12-180
 APPLICATION SPECIFICATION: BUS-20-073
- AFTER INSERTION INTO CIRCUIT BOARD WITH QUALIFIED TOOL.
- AYY PLATING HAS Au FLASH IN PRESS-FIT AREA (LEAD FREE)
- THE PRODUCTS WHERE THE PART NUMBER ENDS IN 'LF' MEET THE EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY REGULATIONS AS DESCRIBED IN GS-22-008.
- FOR LEAD FREE PART NUMBERS, ADD AN 'LF' SUFFIX. EXAMPLE: 88902-X01LF.
- ALL PRODUCTS EXCEPT THOSE WITH PART NUMBERS CONTAINING (DRAWING NO.)-N1--- OR (DRAWING NO.)-N5--- WILL WITHSTAND EXPOSURE TO 260°C FOR 60 SECONDS IN A CONVECTION, INFRA-RED OR VAPOR PHASE REFLOW OVEN. PART NUMBERS (DRAWING NO.)-N1--- AND (DRAWING NO.)-N5--- WILL NOT WITHSTAND REFLOW AND Au CONTACT SURFACES OF THE CONTACTS SHALL BE EXPOSED TO A MAXIMUM OF 140°C FOR NO LONGER THAN 15 SECONDS IN A WAVE SOLDER APPLICATION.

PLATING IN CONTACT AREA


DASH NUMBER	PERFORMANCE LEVEL	NOTES
-PYY	0.25 um GOLD MIN.	SEE NOTE 9
-NIYY	TELCORDIA CO (NXT)	-
-N5YY	TELCORDIA UE (NXT)	-
-1YY	TELCORDIA CO	-
-2YY	TELECOM CLASS	-
-3YY	IEC CLASS I	-
-5YY	TELCORDIA UE	-
-NIYYLF	TELCORDIA CO (NXT) IEC CLASS I	SEE NOTE 10
-N5YYLF	TELCORDIA UE (NXT)	SEE NOTE 10
-1YYLF	TELCORDIA CO IEC CLASS I	SEE NOTE 10
-2YYLF	TELECOM CLASS	SEE NOTE 10
-5YYLF	TELCORDIA UE	SEE NOTE 10

MATERIAL CODE				SEE NOTES		TOLERANCES UNLESS OTHERWISE SPECIFIED		CUSTOMER		FCI	
lir	ecn no.	dr	date	linear	angles	dr	engr	chr	appd	COPY	projection
X	DG09-0256	TER	2009-08-19	0.X ±0.3	0° ±2°	T.BRUNGARD	11/19/99	M.STRAWSE	11/19/99	projection	title
Y	DG09-0306	TER	2009-09-14	0.XX ±0.13	0° ±2°	M.STRAWSE	11/19/99	M.STRAWSE	11/19/99	projection	title
AA	DG09-0366	TER	2009-11-24	.XXX ±0.051	0° ±2°	M.STRAWSE	11/19/99	M.STRAWSE	11/19/99	projection	title
AB	DG10-0165	TER	2010-05-05	0° ±2°	0° ±2°	M.STRAWSE	11/19/99	M.STRAWSE	11/19/99	projection	title
AC	DG10-0243	TER	2010-06-28	0° ±2°	0° ±2°	M.STRAWSE	11/19/99	M.STRAWSE	11/19/99	projection	title
W	DG09-0169	TER	2009-05-25	0° ±2°	0° ±2°	M.STRAWSE	02/29/00	M.STRAWSE	02/29/00	projection	title
sheet index	revision sheet	AC	AC	AC	AC	AC	AC	AC	AC	AC	AC
1	2	3	4								

1 | 2

3 |

4

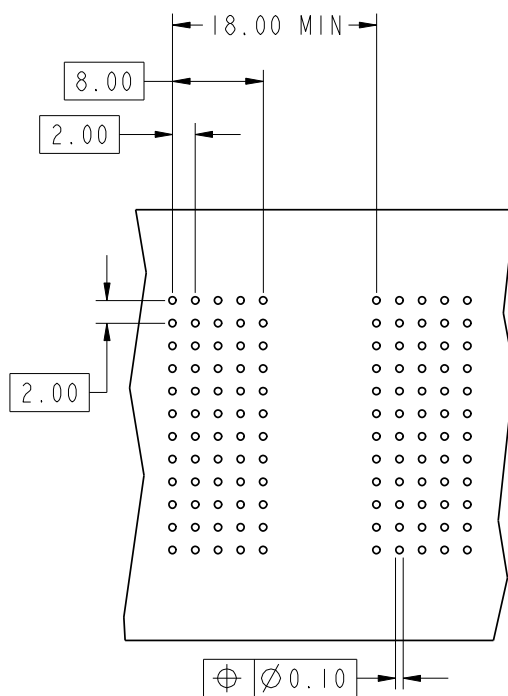

REQUIRED PC BOARD LAYOUT
COMPONENT SIDE
SEE PRINT 58351 FOR
ADDITIONAL PCB INFORMATION

KEY (SIGNAL PRESS-FIT)		
CODE	DIMENSIONS	
	DIM "A" MATE	DIM "B" TAIL
1	5.00	4.30
2	5.75	4.30
3	6.50	4.30
4	7.25	4.30
5	5.00	13.60
6	5.75	13.60
7	6.50	13.60
8	7.25	13.60
19	8.00	4.30
20	8.00	13.60
39	8.00	14.10
54	5.00	11.55
55	5.75	11.55
57	7.25	11.55



This document is the property of and embodies
CONFIDENTIAL and PROPRIETARY information of FCI.
No part of the information shown on this
document may be used in any way or disclosed
to others without the written consent of FCI.
Copyright FCI.

mat'l code				tolerances unless otherwise specified		CUSTOMER		FCI	
lir	ecm no.	dr	date	linear	0.X ±0.3	projection	COPY	www.fciconnect.com	
AC					0.XX ±0.13				
					.XXX ±0.051				
				angles	0° ±2°	MM	scale	product family METRAL	
				dr	T. BRUNGARD 11/19/99				
				enr	M. STRAWSER 11/19/99				
				chr	M. STRAWSER 11/19/99	A	88902	code 213	
				appd	M. STRAWSER 02/29/00				
sheet index	revision sheet								

1 | 2

Pro/E

PDM: Rev:AC

STATUS Released

Printed: Jul 01, 2010



METRAL P/N	ROW	CONTACT CODE MOD. I				
		1	2	3	4	5
88902-X01 SEE NOTE 11 FOR LEAD FREE	E	2	2	2	2	1919
	D	2	2	2	2	1919
	C	2	1	2	3	2 2
	B	2	2	2	2	1919
	A	2	2	2	2	1919
88902-X02 SEE NOTE 11 FOR LEAD FREE	E	6	6	6	6	2020
	D	6	6	6	6	2020
	C	6	5	6	7	6 6
	B	6	6	6	6	2020
	A	6	6	6	6	2020
88902-X03 SEE NOTE 11 FOR LEAD FREE	E	5	3	3	3	3 3
	D	5	3	3	3	3 3
	C	5	3	3	3	3 3
	B	5	3	3	3	3 3
	A	5	3	3	3	3 3
88902-X04 SEE NOTE 11 FOR LEAD FREE	E	7	6	6	6	6 6
	D	7	6	6	6	6 6
	C	7	6	6	6	6 6
	B	7	6	6	6	6 6
	A	7	6	6	6	6 6
88902-X05 SEE NOTE 11 FOR LEAD FREE	E	3	3	2	4	4 19
	D	3	3	2	4	4 19
	C	3	3	2	4	4 19
	B	3	3	2	4	4 19
	A	3	3	2	4	4 19

METRAL P/N	ROW	CONTACT CODE MOD. I				
		1	2	3	4	5
88902-X06 SEE NOTE 11 FOR LEAD FREE	E	2	2	2	4	2 2
	D	2	2	2	4	2 2
	C	2	2	2	4	2 2
	B	2	2	2	4	2 2
	A	2	2	2	4	2 2
88902-X07 SEE NOTE 11 FOR LEAD FREE	E	57	55	55	55	5555
	D	57	55	55	55	5555
	C	57	55	55	55	5555
	B	57	55	55	55	5555
	A	57	55	55	55	5457
88902-X08 SEE NOTE 11 FOR LEAD FREE	E	3	2	2	2	2 2
	D	3	2	2	2	2 2
	C	3	2	2	2	2 2
	B	3	2	2	2	2 2
	A	3	1	2	2	2 2
88902-X09 SEE NOTE 11 FOR LEAD FREE	E	39	39	39	39	3939
	D	39	39	39	39	3939
	C	39	39	39	39	3939
	B	39	39	39	39	3939
	A	39	39	39	39	3939
88902-X10 SEE NOTE 11 FOR LEAD FREE	E	4	2	2	2	2 2
	D	4	2	2	2	2 2
	C	4	2	2	2	1 4
	B	4	2	2	2	2 2
	A	4	2	2	2	2 2

METRAL P/N	ROW	CONTACT CODE MOD. I				
		1	2	3	4	5
88902-X11 SEE NOTE 11 FOR LEAD FREE	E	2	2	2	1	2 1
	D	2	2	2	2	2 2
	C	2	2	2	1	2 1
	B	2	2	2	2	2 2
	A	2	2	2	1	2 1
88902-X12 SEE NOTE 11 FOR LEAD FREE	E	6	6	6	5	6 5
	D	6	6	6	6	6 6
	C	6	6	6	5	6 5
	B	6	6	6	6	6 6
	A	6	6	6	5	6 5
88902-X13 SEE NOTE 11 FOR LEAD FREE	E	2	-	2	-	2 -
	D	-	2	-	2	- 2
	C	2	-	2	-	2 -
	B	-	2	-	2	- 2
	A	2	-	2	-	2 -
88902-X14 SEE NOTE 11 FOR LEAD FREE	E	2	2	2	2	2 2
	D	2	2	2	2	2 2
	C	19	2	2	2	2 2
	B	2	2	2	2	2 2
	A	2	2	2	2	2 2
88902-X15 SEE NOTE 11 FOR LEAD FREE	E	2	2	2	2	2 2
	D	2	2	2	2	2 2
	C	3	2	4	2	2 4
	B	2	2	2	2	2 2
	A	2	4	2	2	2 2

METRAL P/N	ROW	CONTACT CODE MOD. I				
		1	2	3	4	5
88902-X16 SEE NOTE 11 FOR LEAD FREE	E	2	2	2	2	3 2
	D	2	2	2	2	2 2
	C	3	2	4	2	2 4
	B	2	2	2	2	2 2
	A	2	4	2	2	2 3
88902-X17 SEE NOTE 11 FOR LEAD FREE	E	4	-	2	-	2 -
	D	-	2	-	2	- 2
	C	2	-	4	-	4 -
	B	-	2	-	1	- 2
	A	2	-	1	-	2 -
88902-X18 SEE NOTE 11 FOR LEAD FREE	E	2	-	2	-	2 -
	D	-	2	-	2	- 2
	C	2	-	4	-	4 -
	B	-	2	-	2	- 2
	A	2	-	2	-	2 -
88902-X19 SEE NOTE 11 FOR LEAD FREE	E	6	6	6	6	6 6
	D	6	6	6	6	6 6
	C	8	6	6	6	6 6
	B	6	6	6	6	2020
	A	5	6	6	6	2020
88902-X20 SEE NOTE 11 FOR LEAD FREE	E	6	6	6	6	6 6
	D	6	6	6	6	6 6
	C	6	6	6	6	6 8
	B	20	20	6	6	6 6
	A	20	20	6	6	6 6

METRAL P/N	ROW	CONTACT CODE MOD. I				
		1	2	3	4	5
88902-X21 SEE NOTE 11 FOR LEAD FREE	E	2	2	2	2	2 2
	D	2	2	2	2	2 2
	C	2	2	2	2	2 2
	B	2	19	2	19	2 2
	A	2	19	2	19	2 2
88902-X22 SEE NOTE 11 FOR LEAD FREE	E	2	2	2	2	2 2
	D	2	2	2	2	2 2
	C	4	2	2	2	2 2
	B	2	2	2	19	19
	A	1	2	2	19	19
88902-X23 SEE NOTE 11 FOR LEAD FREE	E	2	2	2	2	2 2
	D	2	2	2	2	2 2
	C	19	2	2	2	2 2
	B	1	2	2	2	2 2
	A	19	2	2	2	2 2
88902-X24 SEE NOTE 11 FOR LEAD FREE	E	2	2	2	2	2 2
	D	2	2	2	2	2 2
	C	2	2	2	2	2 4
	B	19	19	2	2	2 2
	A	19	19	2	2	2 2
88902-X25 SEE NOTE 11 FOR LEAD FREE	E	2	2	2	2	2 19
	D	2	2	2	2	2 19
	C	2	2	2	2	2 19
	B	2	2	2	2	2 19
	A	2	2	2	2	2 19

mol't code				tolerances unless otherwise specified		CUSTOMER		FCI	
lir	ecn no.	dr	date	linear	0.X ±0.3	COPY	www.fciconnect.com		
AC				linear	0.XX ±0.13	projection	title		
				angles	.XXX ±.051		METRAL SIGNAL HEADER		
				angles	0° ±2°		1 MOD, 5 ROW PRESS-FIT		
				dr	T.BRUNGARD 11/19/99		product family		code
				enrg	M.STRAWSER 11/19/99		METRAL		213
				chr	M.STRAWSER 11/19/99		size	dwg no	sheet
				appd	M.STRAWSER 02/29/00		A	88902	3
sheet index	revision	sheet				scale	1:1		

METRAL P/N	ROW	CONTACT CODE MOD. I					
		1	2	3	4	5	6
88902-X26 SEE NOTE 11 FOR LEAD FREE	E	1	2	2	2	2	1
	D	2	2	2	2	2	2
	C	2	2	2	2	2	2
	B	2	2	2	2	2	2
	A	1	2	2	2	2	1

METRAL P/N	ROW	CONTACT CODE MOD. I					
		1	2	3	4	5	6
88902-X27 SEE NOTE 11 FOR LEAD FREE	E	5	5	5	1	1	1
	D	5	5	5	1	1	1
	C	5	5	5	1	1	1
	B	5	5	5	1	1	1
	A	5	5	5	1	1	1

METRAL P/N	ROW	CONTACT CODE MOD. I					
		1	2	3	4	5	6
88902-X28 SEE NOTE 11 FOR LEAD FREE	E	19	2	19	2	2	1
	D	2	19	2	19	19	2
	C	19	2	19	2	2	19
	B	2	19	2	19	19	2
	A	19	2	19	2	2	19

METRAL P/N	ROW	CONTACT CODE MOD. I					
		1	2	3	4	5	6
88902-X29 SEE NOTE 11 FOR LEAD FREE	E	2	2	2	2	2	2
	D	2	2	2	2	2	2
	C	2	2	2	2	2	2
	B	2	2	1	2	2	2
	A	2	2	2	2	2	2

METRAL P/N	ROW	CONTACT CODE MOD. I					
		1	2	3	4	5	6
88902-X30 SEE NOTE 11 FOR LEAD FREE	E	2	2	2	1	2	4
	D	2	2	2	2	2	2
	C	2	2	2	2	2	2
	B	2	2	2	2	2	2
	A	2	2	2	2	2	2

METRAL P/N	ROW	CONTACT CODE MOD. I					
		1	2	3	4	5	6
88902-X31 SEE NOTE 11 FOR LEAD FREE	E	4	2	3	3	2	4
	D	4	2	3	3	2	4
	C	4	2	3	3	2	4
	B	4	2	3	3	2	4
	A	4	2	3	3	2	4



mat'l code				tolerances unless otherwise specified		CUSTOMER		FCI	
lfr	ecn no.	dr	date	linear	0.X $\pm$ 0.3	projection	COPY	www.fciconnect.com	
AC					0.XX $\pm$ 0.13				
					.XXX $\pm$.051				
				angles	0° $\pm$ 2°	MM	scale	product family METRAL	
				dr	T. BRUNGARD 11/19/99				
				enrg	M. STRAWSER 11/19/99				
				chr	M. STRAWSER 11/19/99	1:1	A	size	dwg no
				appd	M. STRAWSER 02/29/00				
sheet index	revision sheet								



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.