



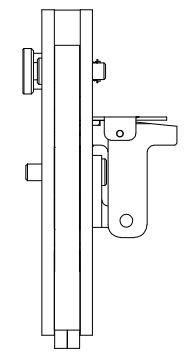


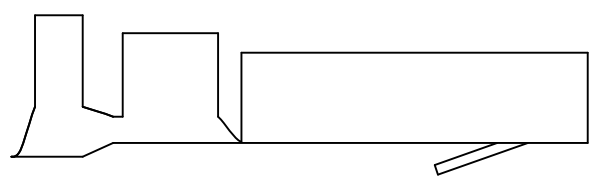
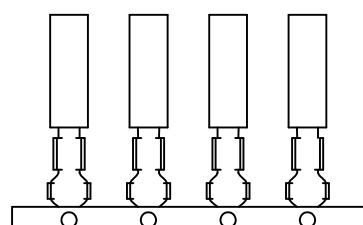


THIS DRAWING IS A CONTROLLED DOCUMENT. DWG NO 1583000	USED ON _____												
	TOOL NUMBER  -1 	WIRE SIZE mm ² [AWG] 	INSULATION DIAMETER mm [in.] 	INSUL. ADJ. 	FLIP LOCATOR 	STRIP LENGTH mm [in.] 	CRIMP HEIGHT mm [in.] 	CONTACT PART NUMBERS 				CONTACT DESCRIP.	APPLIC. SPECIF.
								LOOSE PIECE 		STRIP FORM 			
	91500-1 91500-3 91500-4 	0.5 - 0.9 [20-18] 1.2 - 2.1 [16-14]	1.52 - 3.30 [.060 - .130]	YES	NO	4.75 ± 0.38 [.187 ± .015]	1.27 ± 0.05 [.050 ± .002] 1.60 ± 0.05 [.063 ± .002]	350547-[] 350550-[] 350669-[] 350705-[] 770250-[] 770251-[] 770254-[] 770251-[]	350218-[] 350536-[] 350654-[] 350687-[] 770007-[] 770008-[] 770193-[] 770008-[]	Univ. MATE-N-LOK Contacts Univ. MATE-N-LOK 2 Contacts	114-1010 & 114-1011 114-1043		
	91506-1 91506-3	1.21 - 2.1 [16-14]	3.3 - 5.1 [.130 - .200]	YES	NO	4.75 ± 0.38 [.187 ± .015]	1.60 ± 0.05 [.063 ± .002]	350551-[] 350552-[] 350707-[] 350919-[] 350918-[] 770249-[] 770248-[] 770255-[]	350537-[] 350538-[] 350700-[] 350874-[] 350873-[] 770006-[] 770005-[] 770194-[]	Univ. MATE-N-LOK Contacts Univ. MATE-N-LOK 2 Contacts	114-1010 & 114-1011 114-1043		
	91508-1 91508-3	0.5 - 0.9 [20-18]	3.3 - 5.1 [.130 - .200]	YES	NO	4.75 ± 0.38 [.187 ± .015]	1.24 ± 0.05 [.049 ± .002]	350551-[] 350552-[] 350707-[] 350919-[] 350918-[] 770249-[] 770248-[] 770255-[]	350537-[] 350538-[] 350700-[] 350874-[] 350873-[] 770006-[] 770005-[] 770194-[]	Univ. MATE-N-LOK Contacts Univ. MATE-N-LOK 2 Contacts	114-1010 & 114-1011 114-1043		
	91510-1 91510-3	0.2 - 0.38 [24-22] 0.5 - 0.9 [20-18]	1.02 - 2.54 [.040 - .100]	YES	NO	4.75 ± 0.38 [.187 ± .015]	1.02 ± 0.05 [.040 ± .002] 1.17 ± 0.05 [.046 ± .002]	350689-[] 350690-[] 350706-[] 640347-[] 770252-[] 770253-[]	350570-[] 350561-[] 350699-[] 350851-[] 770009-[] 770010-[]	Univ. MATE-N-LOK Contacts Univ. MATE-N-LOK 2 Contacts	114-1010 & 114-1011 114-1043		
	91522-1 91522-3	0.32 - 0.6 [22-20]	1.50 - 2.2 [.059 - .087]	YES	NO	3.45 ± 0.25 [.136 ± .010]	0.79 ± 0.05 [.031 ± .002]	170364-[] 170366-[]	170360-[] 170362-[]	Mini-Univ. MATE-N-LOK Contacts	114-5050 & 114-16017 114-13089		
		(1 wire) 0.8-0.9 [18] (2 wire) 0.31-0.38 [22]	(1 wire) 1.54-2.4 [.059-.095] (2 wire) 1.5-1.7 [.059-.067]			(1 wire) 3.45 ± 0.25 [.136 ± .010] (2 wire) 3.7 ± 0.2 [.146 ± .008]	1.04 ± 0.05 [.041 ± .002]	794228-[] 794229-[]	794220-[] 794221-[]	Mini-Univ. MATE-N-LOK 2 Contacts			
								770987-[] 770988-[]	770903-[] 770904-[]				
	91529-1 91529-3	0.12 - 0.24 [26-24] 0.32 - 0.38 [22]	1.2 - 1.75 [.047 - .069]	YES	YES	3.45 ± 0.25 [.136 ± .010]	0.69 ± 0.05 [.027 ± .002] 0.79 ± 0.05 [.031 ± .002]	170363-[] 170365-[] 794226-[] 794227-[] 770985-[] 770986-[]	170359-[] 170361-[] 794136-[] 794218-[] 770901-[] 770902-[]	Mini-Univ. MATE-N-LOK Contacts Mini-Univ. MATE-N-LOK 2 Contacts	114-5050 & 114-16017 114-1111 114-13089		
		0.5 - 0.9 [20-18] (1 wire) 1.2-1.4 [16] (2 wire) 0.5-0.6 [20]	2.0 - 3.0 [.079 - .118] (1 wire) 2.5-3.2 [.098-.126] (2 wire) 2.0-2.4 [.079-.094]	YES	NO	3.45 ± 0.25 [.136 ± .010] (1 wire) 3.45 ± 0.25 [.136 ± .010] (2 wire) 3.70 ± 0.20 [.146 ± .008]	1.07 ± 0.05 [.042 ± .002] 1.27 ± 0.05 [.050 ± .002]	171638-[] 171639-[]	171636-[] 171637-[]	Mini-Univ. MATE-N-LOK Contacts	114-5050 & 114-16017		
		91594-1 91594-3	0.50-0.89 [20-18] 0.50-1.42x2 [16-20x2]	2.00-3.20 [.079-.126] 2.26-3.20 [.098-.126]	YES	NO	(1 wire) 3.45 ± 0.25 [.136 ± .010] (2 wire) 3.70 ± 0.20 [.146 ± .008]	1.07 ± 0.05 [.042 ± .002] 1.29 ± 0.05 [.051 ± .002]	794230-[] 794231-[]	794222-[] 794223-[]	Mini-Univ. MATE-N-LOK 2 Contacts	114-1111	

THIS INFORMATION IS CONFIDENTIAL AND PROPRIETARY TO TE CONNECTIVITY. IT IS NOT TO BE DISCLOSED OR REPRODUCED IN ANY MANNER WITHOUT THE WRITTEN AUTHORIZATION OF TE CONNECTIVITY. ANY VIOLATION OF THIS NOTICE WILL BE PROSECUTED TO THE FULL EXTENT OF THE LAW. © 2014 TE CONNECTIVITY. ALL RIGHTS RESERVED.

 LIST OF APPLIED CONTACT PART NUMBERS MAY NOT BE COMPLETE AND IS SUBJECT TO CHANGE. FOR CURRENT INFORMATION ON TERMINAL PART NUMBERS, CONTACT THE TOOLING ASSISTANCE CENTER : 1-800-722-1111.

2. AMP, CERTI-CRIMP, and MATE-N-LOK are trademarks.

 -1 IS A CERTICRIMP II HAND TOOL ASSEMBLY. -3 IS A CERTICRIMP II HEAD SUB-ASSEMBLY.

 SUPERSEDED

 -4 IS A CERTICRIMP II HAND TOOL ASSEMBLY FOR SMALL INSULATION DIAMETER.

6. THE HAND TOOL INSTRUCTION SHEET, ALSO KNOWN AS AN "IS", FOR MOST CERTI-CRIMP II TOOLS USE IS 408-8547. IF THE TOOL HAS A FLIP LOCATOR USE IS 408-10414.

CERTI-CRIMP II DATA SHEET

DWG: M.YOUNGER 21FEB2012		MATERIAL: -	HEAT TREAT: -
CHK: B.A.WOLFE 22FEB2012			
APVD: B.A. WOLFE 22FEB2012			
NAME: CERTI-CRIMP II TOOL DATA SHEET			
UNIVERSAL MATE-N-LOK CONTACT FAMILY			
SCALE: -	SIZE: A1	DRAWING NO: 1583000	SHEET: 1 of 2
REV: C1			

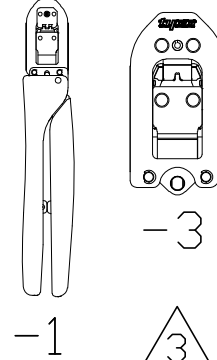






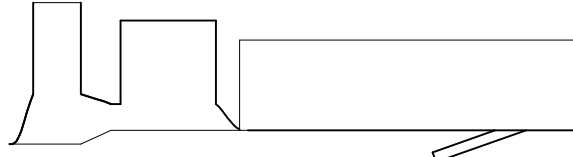
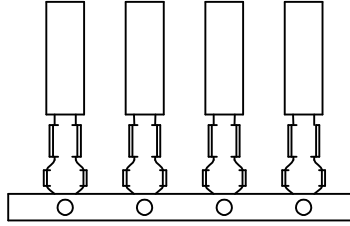
0	PLC	±	-
1	PLC	±	-
2	PLC	±	-
3	PLC	±	-
4	PLC	±	-

ANGLES: ±	-
SURFACE TEXTURE	✓

P	LTR	REVISION RECORD	DATE	DWN	APVD

LOC: A
DIST: 00

THIS INFORMATION IS CONFIDENTIAL AND PROPRIETARY TO TE CONNECTIVITY. IT IS TO BE USED ONLY FOR THE PURPOSES AND APPLICATIONS SPECIFIED IN THE DRAWING. IT IS NOT TO BE REPRODUCED, COPIED, OR TRANSMITTED IN ANY FORM OR BY ANY MEANS, WITHOUT AUTHORIZATION FROM TE CONNECTIVITY.

USED ON										
TOOL NUMBER  -1 	WIRE SIZE mm ² [AWG] 	INSULATION DIAMETER mm [in.] 	INSUL. ADJ. 	FLIP LOCATOR 	STRIP LENGTH mm [in.] 	CRIMP HEIGHT mm [in.] 	CONTACT PART NUMBERS 		CONTACT DESCRIP.	APPLIC. SPECIF.
							LOOSE PIECE 	STRIP FORM 		
 91574-1	0.20-0.56 [24-20]	1.52-2.54 [.060-.100]	YES	NO 	5.16 ± 0.38 [.203 ± .015]	1.05 ± 0.08 [.041 ± .003]	350689-[]	350570-[]	Universal MATE-N-LOK Contacts	114-1010 & 114-1011
	0.75-0.89 [18]					1.27 ± 0.08 [.050 ± .003]	350690-[]	350561-[]		
 91575-1	0.50-0.89 [20-18]	2.54-3.31 [.100-.130]	YES	NO 	5.16 ± 0.38 [.203 ± .015]	1.29-1.45 [.051-.057]	350547-[]	350218-[]	Universal MATE-N-LOK Contacts	114-1010 & 114-1011
	0.75+0.75 OR 0.75+1.25 [18+18 OR 18+16]					1.60-1.75 [.063-.069]	350669-[]	350564-[]		
1976176-1	18 GA SOLID	1.02-2.54 [.040-.100]	YES	NO 	4.37-0.38 [.172-.015]	1.118 ± .025 [.044 ± .001]	350689-[] 350550-[] 350690-[] 350547-[]	350851-[] 350536-[] 350561-[] 350218-[]	Universal MATE-N-LOK Contacts	114-1010 & 114-1011

 LIST OF APPLIED CONTACT PART NUMBERS MAY NOT BE COMPLETE AND IS SUBJECT TO CHANGE. FOR CURRENT INFORMATION ON TERMINAL PART NUMBERS, CONTACT THE TOOLING ASSISTANCE CENTER : 1-800-722-1111.

2. AMP, CERTI-CRIMP, and MATE-N-LOK are trademarks.


 -1 IS A CERTICRIMP II HAND TOOL ASSEMBLY.
-3 IS A CERTICRIMP II HEAD SUB-ASSEMBLY.

 SUPERSEDED

 -4 IS A CERTICRIMP II HAND TOOL ASSEMBLY FOR SMALL INSULATION DIAMETER.

6. THE HAND TOOL INSTRUCTION SHEET, ALSO KNOWN AS AN "IS", FOR MOST CERTI-CRIMP II TOOLS USE IS 408-8547. IF THE TOOL HAS A FLIP LOCATOR USE IS 408-10414.

CERTI-CRIMP II DATA SHEET

DIMENSIONS: mm		TOLERANCES UNLESS OTHERWISE SPECIFIED:		DWN: 21FEB2012	MATERIAL: -	HEAT TREAT: -
		0 PLC ± - 1 PLC ± - 2 PLC ± - 3 PLC ± - 4 PLC ± -		CHK: 22FEB2012	 TE Connectivity	
ANGLES: ± -		SURFACE TEXTURE: 		APVD: 22FEB2012		
P	LTR	REVISION RECORD	DATE	DWN	APVD	SCALE: -
- SEE SHEET 1		-	-	-	-	SIZE: A1
						DRAWING NO: 1583000
						SHEET 2 of 2
						REV C1

LOC	A
DIST	00



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.