


780-002

"Marshal Bean" Protective Rubber Cover for Circular Receptacle Connectors

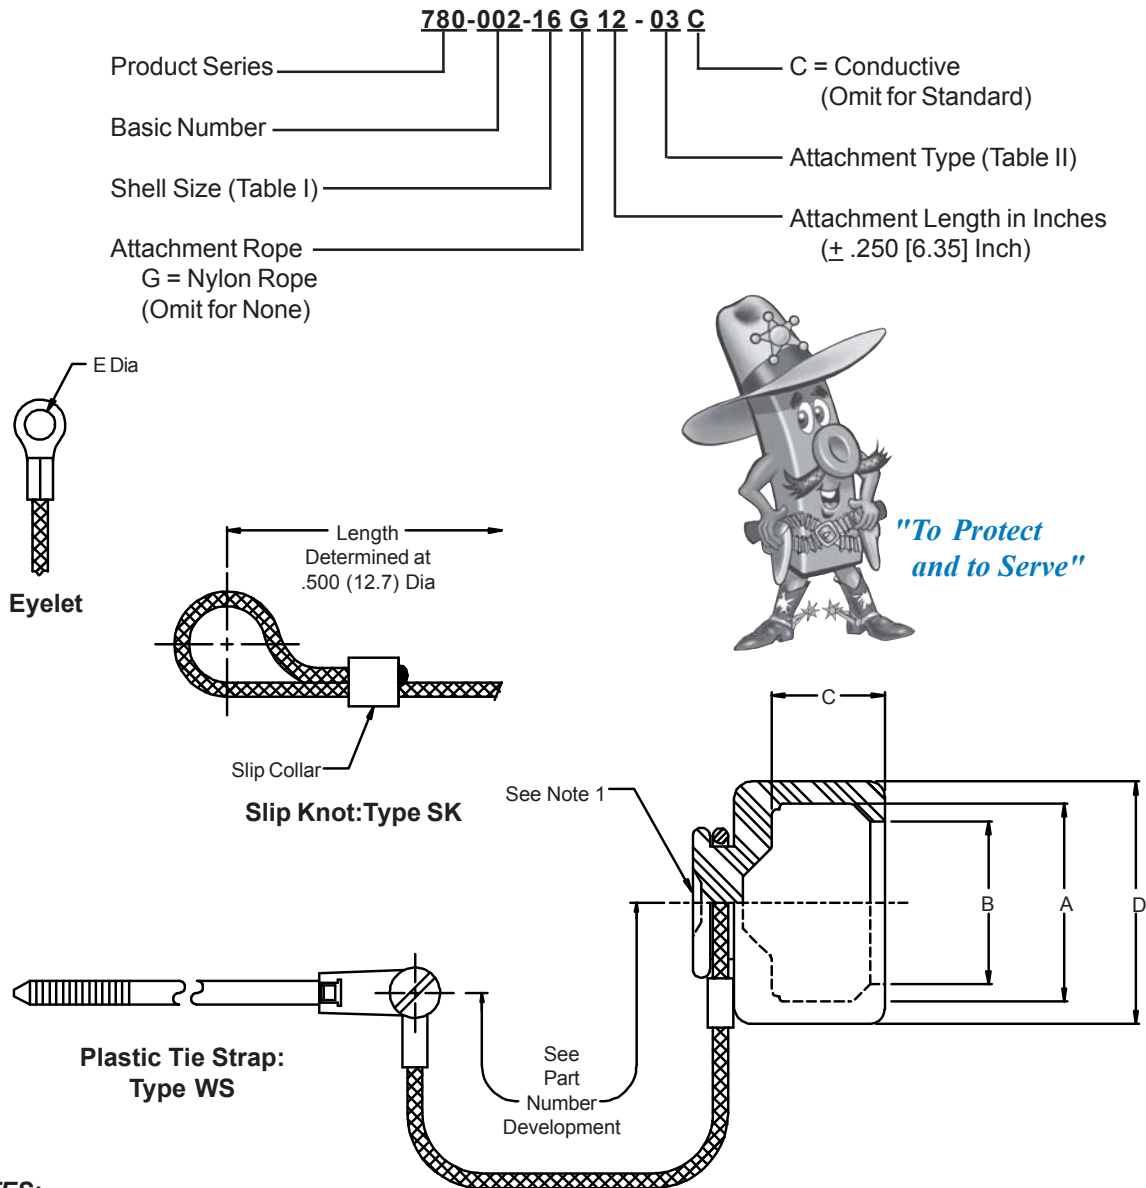

NOTES:

1. Cover identified in area shown.
2. Metric dimensions (mm) are indicated in parentheses.
3. This series of covers is similar to Bean Rubber Mfg. Co. BP Series, Same Dash Number Except as noted in Table I), ie: SBP-16-WC equivalent to 780-002-16G12-09.
4. Material/Finish: Cover - 5BR blend/A.A.
Lanyard, Screw and Locknut - Cres/Passivated; Slip Bushing - Kynar/N.A.
5. Standard material contains trace amounts of sulfur (a vulcanizing agent) which is known to contribute to degradation/corrosion of silver plated components such as braid, etc. Specify MOD Code suffix -678 for sulfur-free material.

780-002 "Marshal Bean" Protective Rubber Cover for Circular Receptacle Connectors



Miscellaneous
Accessories

TABLE I: SHELL SIZE

Shell Size	A Dia	B Dia	C Dim	D Dia
01	.160 (4.1)	N/A	.400 (10.2)	.750 (19.1)
02	.240 (6.1)	.220 (5.6)	.400 (10.2)	.750 (19.1)
03	.320 (8.1)	.250 (6.4)	.300 (7.6)	.750 (19.1)
04	.420 (10.7)	.390 (9.9)	.630 (16.0)	.750 (19.1)
05	.370 (9.4)	.330 (8.4)	.500 (12.7)	.750 (19.1)
06	.470 (11.9)	.440 (11.2)	.630 (16.0)	.750 (19.1)
07	.780 (19.8)	.560 (14.2)	.630 (16.0)	1.150 (29.2)
08	.780 (19.8)	.560 (14.2)	.630 (16.0)	1.150 (29.2)
09	.850 (21.6)	.650 (16.5)	.630 (16.0)	1.250 (31.8)
10	.890 (22.6)	.680 (17.3)	.630 (16.0)	1.250 (31.8)
11	1.050 (26.7)	.830 (21.1)	.630 (16.0)	1.560 (39.6)
12	1.060 (26.9)	.840 (21.3)	.630 (16.0)	1.560 (39.6)
13	1.220 (31.0)	1.000 (25.4)	.630 (16.0)	1.680 (42.7)
14	1.180 (30.0)	.960 (24.4)	.630 (16.0)	1.680 (42.7)
15	1.350 (34.3)	1.130 (28.7)	.630 (16.0)	1.810 (46.0)
16	1.310 (33.3)	1.090 (27.7)	.630 (16.0)	1.810 (46.0)
17	1.480 (37.6)	1.260 (32.0)	.630 (16.0)	2.040 (51.8)
18	1.420 (36.1)	1.210 (30.7)	.630 (16.0)	2.040 (51.8)
19	1.560 (39.6)	1.340 (34.0)	.630 (16.0)	2.150 (54.6)
20	1.560 (39.6)	1.340 (34.0)	.630 (16.0)	2.180 (55.4)
21	1.680 (42.7)	1.460 (37.1)	.630 (16.0)	2.310 (58.7)
22	1.680 (42.7)	1.460 (37.1)	.630 (16.0)	2.310 (58.7)
23	1.800 (45.7)	1.590 (40.4)	.630 (16.0)	2.430 (61.7)
24	1.800 (45.7)	1.590 (40.4)	.630 (16.0)	2.430 (61.7)
25	1.960 (49.8)	1.740 (44.2)	.630 (16.0)	2.580 (65.5)
26	1.900 (48.3)	1.710 (43.4)	.630 (16.0)	2.640 (67.1)
27	2.160 (54.9)	1.750 (44.5)	.630 (16.0)	2.580 (65.5)
28	2.050 (52.1)	1.580 (40.1)	.630 (16.0)	3.300 (83.8)
32	2.310 (58.7)	2.130 (54.1)	TBD	2.980 (75.7)
36	2.560 (65.0)	2.320 (58.9)	TBD	3.180 (80.8)
40	2.810 (71.4)	2.590 (65.8)	.690 (17.5)	3.430 (87.1)
50	3.000 (76.2)	2.870 (72.9)	TBD	3.570 (90.7)
12JA	.980 (24.9)	.840 (21.3)	.630 (16.0)	1.250 (31.8)

**TABLE II:
ATTACHMENT
TYPE**

Dash No.	E Dia ±.010 (0.3)
00	No Terminal
01	.140 (3.6)
02	.182 (4.6)
03	.191 (4.9)
04	.197 (5.0)
05	.167 (4.2)
06	.125 (3.2)
07	.218 (5.5)
09	.156 (4.0)
WS	With Strap
SK	Slip Knot

Metric dimensions (mm) are indicated in parentheses.

CONNECTOR APPLICATION REFERENCE

Shell Size	MIL-DTL-5015	MIL-C-26482 Series I & II	MIL-DTL-38999 Series I	MIL-DTL-38999 Series II	MIL-DTL-38999 Series III	MIL-DTL-83723 Series III Bayonet	MIL-DTL-83723 Series III Threaded	MIL-C-81511 Series I, II, III & IV	MIL-C-28840
04	8, 8S	8		8					
06		10	9	10		8	8	8	
08	10S, 10SL		11		9	10	10	10	
09	12, 12S	12		12	11				A (11)
10			13						
11	14, 14S	14		14	13	12	12	14	B (13)
12			15			14	14		
13	18	18	17	18					D (17)
14	16, 16S	16		16	15	16	16	16	C (15)
15	20	20		20	19				
16			19		17	18	18	18	
17	22	22		22	21				E (19)
18			21			20	20	20	
19	24								
20			23		23	22	22	22	G (25)
21					25				F (23)
22		24	25	24		24	24	24	
23	28								H (29)
26									J (33)
28	32								
32	36								
36	40								
40	44								
50	48								



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.