



SWITCHED USB
EXPANSION HUBS



HUBPORT®

Industrial grade switched hubs offer instant Plug and Play USB connectivity

Hubport offers a simple solution for adding USB ports to a PC, server or thin client for instant peripheral device connectivity. This external, user installable solution plugs into a standard USB port to provide additional USB ports in a compact chassis. The switched USB architecture guarantees maximum performance on all ports simultaneously.


Models include AC or DC powered hubs that accept power from standard AC wall plugs or a range of 5.5-30 VDC power sources, such as vehicle batteries. The Industrial grade compact chassis is small enough to fit nearly anywhere. With a high USB port count, the rack mount option is perfect for data center applications.

Feature-rich design, extensive operating system support and reliable performance make Hubport ideal for mission-critical environments. Applications include connecting devices to a hub powered by car or truck battery for mobile applications; providing multiport USB connectivity in a kiosk or other compact environments; and connecting USB peripheral devices at an office workstation.

BENEFITS

- Industrial USB 2.0 or 3.1 hubs for instant USB expansion
- Compact chassis with 4 or 7 port options
- Rack-mountable 14-port USB 2.0 model
- AC models for indoor applications
- Variable range DC models for outdoor/mobile applications
- Switched USB ensures maximum performance on all ports
- Locking or Terminal power connector on compact models
- Individual port power management

APPLICATION EXAMPLE

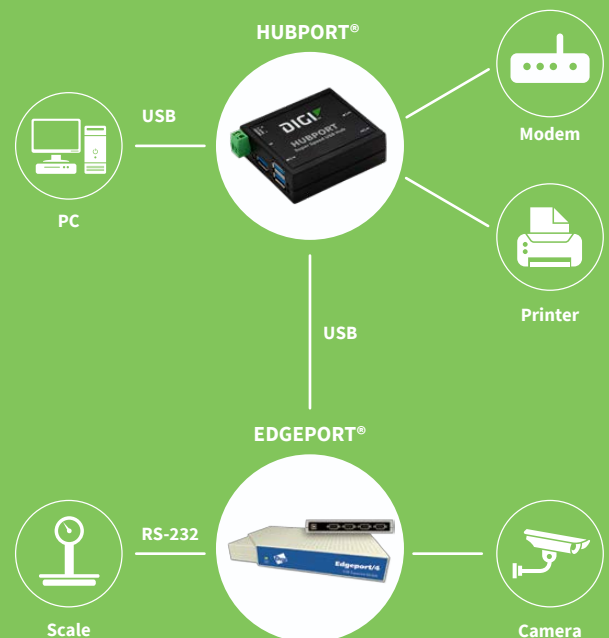

RELATED PRODUCTS



Edgeport®



AnywhereUSB








XStick USB
Adapter



XBee 802.15.4
Adapters

USB FEATURES			
PORTS	7 USB 3.1 Type A	4 or 7 USB 2.0 Type A	14 USB 2.0 Type A
DATA RATE	5 Gbps	480 Mbps; Multi-TT switched USB architecture guarantees a full 12 Mbps simultaneously on all downstream ports, even if a high-speed 480 Mbps transfer is active	
GENERAL FEATURES			
POWER	Individual port power management; 500 mA downstream power available per port		
OPERATING SYSTEMS	Linux®, Windows Server 2016, Windows 10®, Windows Server® 2012, Windows 8®, Windows® 7, Windows Vista®, Windows Server® 2008, Windows XP®, Windows® XP Embedded, Windows NT® 4.0**, Windows NT Embedded**, Windows CE, Windows Server® 2003, Windows 2000		
LEDS	1 System status LED 7 Port Status LEDs; Yellow=Full/High speed, Blue=Super Speed, Off=Port not in operation	1 System status LED 4 or 7 Port Status LEDs; Green=Port operational, Off = Port out of operation	1 System Status LED 14 Port Status LEDs; Green=Port operational, Blinking Green=Port needs attention, Off = Port not in operation
DIMENSIONS (L X W X H) & WEIGHT	2.61 in x 3.00 in x 1.00 in (6.63 cm x 7.62 cm x 2.54 cm); 6.20 oz (175.80 g)	2.61 in x 3.00 in x 1.00 in (6.63 cm x 7.62 cm x 2.54 cm); 6.20 oz (175.80 g)	4.97 in x 17.00 in x 1.74 in (12.62 cm x 43.18 cm x 4.42 cm); 35.00 oz (1134 g)
OTHER	No additional IRQ or memory address requirements; Hot-swappable; 14 port is 1U Rack-Mountable (mounting ears included); Plug and Play; USB ports are backwards compatible to USB 2.0, 1.1 and 1.0		
POWER REQUIREMENTS			
POWER INPUT (AC MODELS)	N/A	Ships with plug-mounted 120-230VAC 50-60 Hz at 5VDC @ 3Amps max	Single 120-230 VAC 50/60 Hz power input IEC 60320 inlet. Max power 40W
POWER INPUT (DC MODELS)	Variable power DC products are 6V to 28V Max power of 35W (Terminal Block connector)	Variable power DC products are 5.5V to 30V @ 15W (Locking Power connector pigtail included)	N/A
ENVIRONMENTAL			
OPERATING TEMPERATURE	-40°C to +70°C (-40°F to 158°F) (Industrial)	Hubport/7c (AC model) 0°C to 55°C or Hubport/4c DC and Hubport/7c DC -40°C to +70°C	0°C to 55°C (32°F to 131°F)
RELATIVE HUMIDITY	0% to 95% (non-condensing)		
REGULATORY APPROVALS			
SAFETY	EN60950, UL 1950, CSA 2.2 No. 950, IEC 950		
EMISSIONS/IMMUNITY	CE, FCC Part 15 Class B, EN55022 Class B, EN55024		

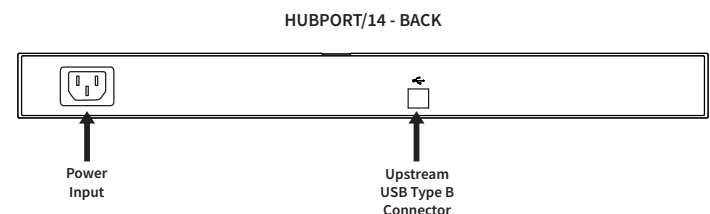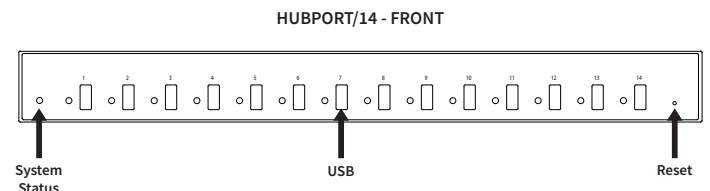

*Third-party support only.

**Supported when connecting Digi products.

PART NUMBERS	DESCRIPTION
HP-USB-14	Hubport/14 - 14-port USB 2.0 hub 19" rack 1U
301-2010-27	Hubport/7c - 7-port switched USB 2.0 hub (Worldwide)
301-3010-71	Hubport/7c - USB 3.1 SuperSpeed 6-28U DC (international)
301-1010-44	Hubport/4c 5.5-30V DC powered USB 2.0 hub, 4 type A and 1 type B USB connectors
301-1010-74	Hubport/7c 5.5-30V DC powered USB 2.0 hub, 7 type A and 1 type B USB connectors
301-3010-71	Hubport/7c USB 3.1 SuperSpeed 6-28V DC, with terminal power connector

FOR MORE INFORMATION
PLEASE VISIT WWW.DIGI.COM

DIGI SERVICE AND SUPPORT / You can purchase with confidence knowing that Digi is always available to serve you with expert technical support and our industry leading warranty. For detailed information visit www.digi.com/support.

© 1996-2018 Digi International Inc. All rights reserved.
All trademarks are the property of their respective owners.

91001224
G8/1018

DIGI INTERNATIONAL WORLDWIDE HQ
877-912-3444 / 952-912-3444 / www.digi.com

DIGI INTERNATIONAL GERMANY
+49-89-540-428-0

DIGI INTERNATIONAL JAPAN
+81-3-5428-0261 / www.digi-intl.co.jp

DIGI INTERNATIONAL SINGAPORE
+65-6213-5380

DIGI INTERNATIONAL CHINA
+86-21-50492199 / www.digi.com.cn





Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.