THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION 20
© COPYRIGHT 20 BY - ALL RIGHTS RESERVED.

LOC	DIST
FX	00

REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
	U4	REVISED PER ECO-11-005030	11MAR2011	RK	HMR
	V	REVISED PER ECO-11-009058	02MAY2011	DLD	WTW
	V1	REVISED PER ECO-12-012119	05JUL2012	DLD	DCM

V23542-G1104-P10••-7627

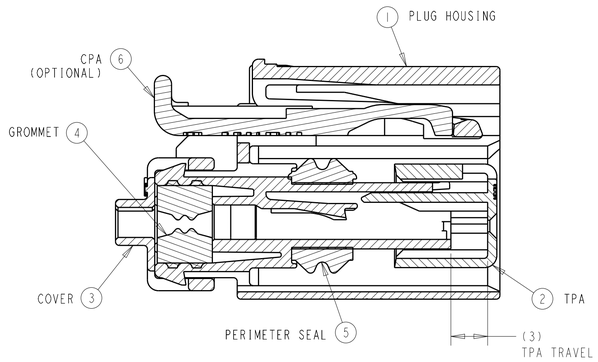

SECTION A-A
SHOWN WITH TPA AND CPA (OPTIONAL) IN THEIR PRE-LOADED POSITION (DELIVERY CONDITION)

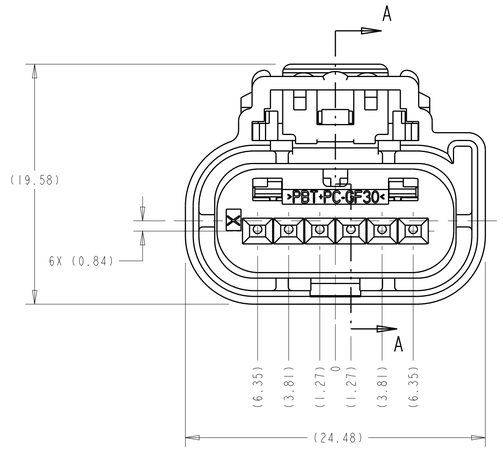

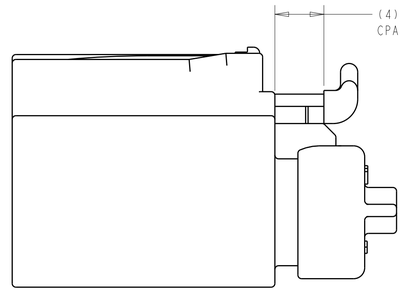



KEYING OPTION "A"



KEYING OPTION "B"



KEYING OPTION "C"



KEYING OPTION "D"

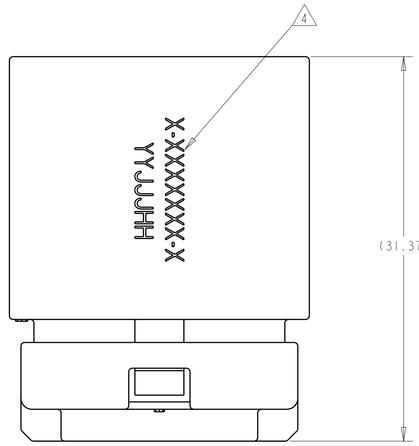

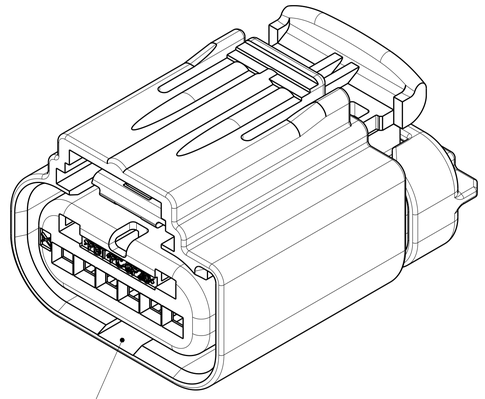

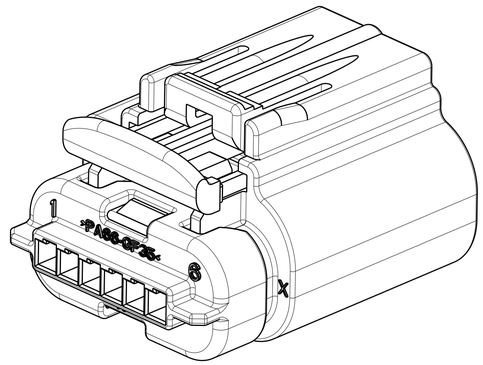

SCALE 1:1

KEYING OPTION "A" SHOWN
SEE NOTE 5 FOR APPLICABLE HEADER INTERFACE INFORMATION

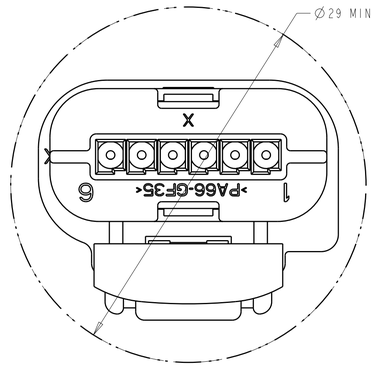

MINIMUM FEED THROUGH CONDITION
WITH 1mm CLEARANCE ALL AROUND

1-1438153-9	1-1438153-8	1-1438153-7	1-1438153-6	1-1438153-5	1-1438153-4	1-1438153-3	1-1438153-2	1-1438153-1	1-1438153-0	1438153-9	1438153-8	1438153-7	1438153-6	1438153-5	1438153-4	1438153-3	1438153-2	1438153-1	1-1419168-5	1-1419168-4	1-1419168-3	1-1419168-2	1-1419168-1	1-1419168-0	1419168-9	1419168-8	1419168-7	ITEM	DESCRIPTION	MATERIAL	COLOR
<---- ASSEMBLY PART NUMBERS																														
1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	6	CPA	PBT-GF20	RED
1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	5	PERIMETER SEAL	SILICONE	GREEN
1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	4	GROMMET	SILICONE	BROWN
1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	3	COVER	PA66-GF35	BLACK
1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	2	TPA	PBT+PC-GF30	RED
																				1				1				1	PLUG WITH KEYING KEYING OPTION "D"	PA66-GF35	BLACK
		1	1																1		1			1				1	PLUG WITH KEYING KEYING OPTION "C"	PA66-GF35	BLACK
				1	1	1			1	1			1	1	1		1					1				1		1	PLUG WITH KEYING KEYING OPTION "B"	PA66-GF35	BLACK
1							1	1			1	1				1	1						1				1	1	PLUG WITH KEYING KEYING OPTION "A"	PA66-GF35	BLACK
QUANTITY																												ITEM	DESCRIPTION	MATERIAL	COLOR

1. APPLICABLE TERMINAL PART NUMBERS (SOLD SEPARATELY):
   FOR TIN APPLICATIONS: 1393367 AND 1393366.
   FOR GOLD APPLICATIONS: 1393365 AND 1393364.
   FOR TERMINATION AND REELING OPTIONS
   SEE DRAWINGS 1393367, 1393366, 1393365, AND 1393364.

2. COMPATIBLE WIRE SIZES FOR MAT SEAL DESIGN 1.19 TO 2.06 O.D.
   (22-18 AWG, 0.35-0.75 mm^2)

3. TPA IS SHIPPED IN PRE-LOADED POSITION. SOME TPA'S MAY BECOME FULLY SEATED DURING SHIPPING. USE TE CONNECTIVITY INSTRUCTION SHEET 408-10128 TO REPOSITION TPA TO IT'S PRE-LOADED POSITION.

4. TE CONNECTIVITY ASSEMBLY PART NUMBER (X-XXXXXXX-X) AND TRACEABILITY CODE (YY = TWO DIGIT YEAR, JJJ = JULIAN DAY, HH = TWO DIGIT MILITARY HOUR) ARE PRINTED IN THIS LOCATION.

5. APPLICABLE HEADER INTERFACE DRAWING 1438199 IS AVAILABLE UPON REQUEST. A COPY OF THIS DRAWING CAN BE OBTAINED FROM THE TE CONNECTIVITY PRODUCT MANAGER, VIA YOUR TE CONNECTIVITY SALES REPRESENTITVE OR CUSTOMER SERVICE.

6. ASSEMBLIES ARE BULK PACKAGED.

7. OPTIONAL CPA IS SHIPPED IN IT'S PRE-LOADED POSITION.

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: mm

TOLERANCES UNLESS OTHERWISE SPECIFIED:
0 PLC ±-
1 PLC ±0.3
2 PLC ±0.10
3 PLC ±-
4 PLC ±-
ANGLES ±3°

MATERIAL - -
FINISH - -

DWN M. FORISKA 15OCT2001
CHK M. FORISKA 15OCT2001
APVD A. SHUMAN 15OCT2001
PRODUCT SPEC -
APPLICATION SPEC 114-13150
WEIGHT -

TE Connectivity

NAME 1 X 6 SEALED CONNECTOR HARNESS ASSEMBLY

SIZE A1 | CAGE CODE 00779 | DRAWING NO C-1-1419168-1 | RESTRICTED TO -

CUSTOMER DRAWING | SCALE 4:1 | SHEET 1 OF 2 | REV V1

4805 (3/11)

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION 20
© COPYRIGHT 20 BY - ALL RIGHTS RESERVED.

LOC	DIST
FX	00

REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
	-	SEE SHEET 1	-	-	-

6			3	2	1	1-1438153-9	---
6						1-1438153-3	3L2T-14A464-BA-006
			3			1-1438153-2	3L2T-14A464-BA-005
			3		1	1438153-9	3L2T-14A464-BA-004
		4				1438153-8	3L2T-14A464-BA-003
					1	1438153-4	3L2T-14A464-BA-002
6					1	1438153-1	3L2T-14A464-BA-001
						1-1419168-1	3L2T-14A464-BA-000
6	5	4	3	2	1	TE CONNECTIVITY ASSEMBLY PART NUMBER	FORD PART NUMBER
TERMINAL POSITIONS							

CAVITIES WITH A NUMBER INDICATES CLOSED TERMINAL HOLE LOCATION

BLANK CAVITIES INDICATES OPEN TERMINAL HOLE LOCATION

KEY A, WITH CPA

6						1-1438153-6	3W4T-14A464-VA-007
6	5		3		1	1-1438153-5	3W4T-14A464-VA-006
6				2	1	1-1438153-4	3W4T-14A464-VA-005
	5					1-1438153-1	3W4T-14A464-VA-004
		4			1	1-1438153-0	---
					1	1438153-6	3W4T-14A464-VA-003
6					1	1438153-5	3W4T-14A464-VA-002
6		4			1	1438153-2	3W4T-14A464-VA-001
						1-1419168-2	3W4T-14A464-VA-000
6	5	4	3	2	1	TE CONNECTIVITY ASSEMBLY PART NUMBER	FORD PART NUMBER
TERMINAL POSITIONS							

CAVITIES WITH A NUMBER INDICATES CLOSED TERMINAL HOLE LOCATION

BLANK CAVITIES INDICATES OPEN TERMINAL HOLE LOCATION

KEY B, WITH CPA

					1	1-1438153-8	9U5T-14A464-GAA-003
6					1	1-1438153-7	9U5T-14A464-GAA-002
6						1-1419168-5	9U5T-14A464-GAA-001
						1-1419168-3	9U5T-14A464-GAA
6	5	4	3	2	1	TE CONNECTIVITY ASSEMBLY PART NUMBER	FORD PART NUMBER
TERMINAL POSITIONS							

CAVITIES WITH A NUMBER INDICATES CLOSED TERMINAL HOLE LOCATION

BLANK CAVITIES INDICATES OPEN TERMINAL HOLE LOCATION

KEY C, WITH CPA

					1	1438153-3	3L2T-14A464-GA-001
						1419168-7	3L2T-14A464-GA-000
6	5	4	3	2	1	TE CONNECTIVITY ASSEMBLY PART NUMBER	FORD PART NUMBER
TERMINAL POSITIONS							

CAVITIES WITH A NUMBER INDICATES CLOSED TERMINAL HOLE LOCATION

BLANK CAVITIES INDICATES OPEN TERMINAL HOLE LOCATION

KEY A, NO CPA

6					1	1438153-7	4L5T-14A464-BA-001
						1419168-8	4L5T-14A464-BA-000
6	5	4	3	2	1	TE CONNECTIVITY ASSEMBLY PART NUMBER	FORD PART NUMBER
TERMINAL POSITIONS							

CAVITIES WITH A NUMBER INDICATES CLOSED TERMINAL HOLE LOCATION

BLANK CAVITIES INDICATES OPEN TERMINAL HOLE LOCATION

KEY B, NO CPA

						1419168-9	---
6	5	4	3	2	1	TE CONNECTIVITY ASSEMBLY PART NUMBER	FORD PART NUMBER
TERMINAL POSITIONS							

CAVITIES WITH A NUMBER INDICATES CLOSED TERMINAL HOLE LOCATION

BLANK CAVITIES INDICATES OPEN TERMINAL HOLE LOCATION

KEY C, NO CPA

						1-1419168-0	---
6	5	4	3	2	1	TE CONNECTIVITY ASSEMBLY PART NUMBER	FORD PART NUMBER
TERMINAL POSITIONS							

CAVITIES WITH A NUMBER INDICATES CLOSED TERMINAL HOLE LOCATION

BLANK CAVITIES INDICATES OPEN TERMINAL HOLE LOCATION

KEY D, NO CPA

PINOUT CHARTS

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: mm

TOLERANCES UNLESS OTHERWISE SPECIFIED:
0 PLC ±-
1 PLC ±0.3
2 PLC ±0.10
3 PLC ±-
4 PLC ±-
ANGLES ±3°

MATERIAL - -

FINISH - -

DWN M. FORISKA 15OCT2001
CHK M. FORISKA 15OCT2001
APVD A. SHUMAN 15OCT2001
PRODUCT SPEC -
APPLICATION SPEC -
WEIGHT -

TE Connectivity

NAME 1 X 6 SEALED CONNECTOR HARNESS ASSEMBLY

SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A1	00779	C-1-1419168-1	-

CUSTOMER DRAWING

SCALE 4:1 SHEET 2 OF 2 REV V1

Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits,General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)
Факс: 8 (812) 320-02-42
Электронная почта: org@eplast1.ru
Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.