



## SILICONE RUBBER SURFACE RTD

### Temperature Sensor

#### Specifications

- Fast Response
- Surface Sensing
- Noninvasive, Simple Installation
- Flat, Flexible
- Custom Dimensions Available

The Silicone Rubber Surface RTD is a flat, flexible, rectangular sensor with a sensing element laminated in silicone rubber. They are used to monitor or measure temperature on round or uneven surfaces. For motor and generator applications, they are commonly used in the end turns of the windings. Silicone rubber surface RTD sensors are manufactured with plotted element style. A plotted element allows for measuring the average temperature over an extended area. Measurement Specialties has many sizes available from stock or we can customize to meet your specifications.

#### Features

- Temperature Range:
  - » -50° to 220°C (-58° to 428°F)
- Elements:
  - » Platinum, Copper, Nickel
  - » Style: Plotted
- Optional Adhesive Backing
- Leadwire/Cable Options

#### Applications

- Industrial
- Electric Motors
- Generators
- HVACR
- Aerospace & Defense

## SILICONE RUBBER SURFACE RTD

Temperature Sensor

### Performance Specifications

#### Time Constant:

Two seconds maximum for 63.2% response to change in temperature per ASTM E644

#### Repeatability:

Less than  $\pm .06\%$  change in ice point resistance after 10 consecutive cycles between ice point and 250°C

#### Long Term Stability:

Less than  $\pm .2\%$  ice point resistance shift after 1000 hours at 250°C

#### Self-Heating:

10 mW/C in water moving 3 feet/sec

#### Hysteresis:

$\pm .15\%$  of span temperature

#### Dielectric Strength:

1,000 Volts RMS at 60 Hz, for one minute, element to outer surfaces, with 1 mA leakage current

#### Application Temperature Range:


Plotted Element: -50 to 220°C (-58 to 428°F)

#### Leadwires:

Three Wire: 26 AWG PTFE Insulated

Four Wire: 26 AWG PTFE Insulated

### Dimensions

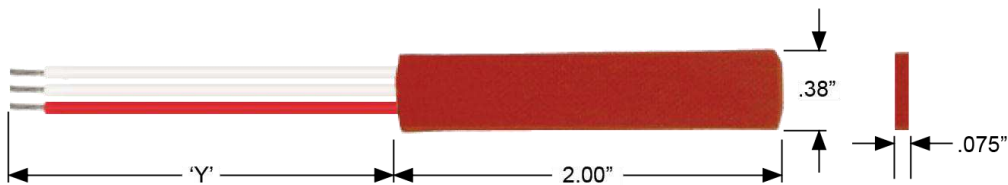

'Y' = Leadwire/Cable Length

## SILICONE RUBBER SURFACE RTD

Temperature Sensor

### Ordering Information

#### Silicone Rubber Surface RTD Sensor

Model	Temperature Range
-------	-------------------

320M	Moderate Temperature: -50 to 220°C (-58 to 428°F)
------	---

Model	Element	Accuracy	Temperature Coefficient
-------	---------	----------	-------------------------

P2B	Platinum	100 Ohm $\pm$ .12% at 0°C	.00385
P2C	Platinum	100 Ohm $\pm$ .5% at 0°C	.00385
G2C	Platinum	100 Ohm $\pm$ .5% at 0°C	.00392
C1D	Copper	10 Ohm $\pm$ .2% at 25°C	.00427
N3C	Nickel	120 Ohm $\pm$ .5% at 0°C	.00672

Model	Leadwires, Element Configuration	Color Code
-------	----------------------------------	------------

2S	Two Wire, Single	Red/White
3S	Three Wire, Single	Red/White/White
4S	Four Wire, Single	Red/Red/White/White

Model	'Y' Leadwire/Cable Options
-------	----------------------------

----	Define 'Y' Length in Inches (120 = 120.0")
------	--

Model	Leadwire Material
-------	-------------------

A	PTFE
---	------

Model	Mounting Options
-------	------------------

1	Standard, No Adhesive
2	Adhesive Backing

#### Stocked Part Numbers\*

Part Number	Model Number
R-1630	320M C1D 3S 36 A 1
R-2428	320M P2C 3S 96 A 1
R-10224-16	320M P2C 3S 180 A 1
R-10494-3	320M C1D 3S 96 A 1

\* Please consult factory for availability.

#### NORTH AMERICA

Measurement Specialties, Inc.,  
a TE Connectivity Company  
1711 139th Lane NW  
Andover, MN 55304  
Tel +1 763 689 4870  
Fax +1 763 689 5033  
temp.eng.us@meas-spec.com

#### EUROPE

Measurement Specialties (Europe), Ltd.,  
a TE Connectivity Company  
4 Rue Gaye Marie  
31027 Toulouse, France  
Tel +33 (0) 582 082 200  
Fax +33 (0) 582 082 151

#### ASIA

Measurement Specialties (China), Ltd.,  
a TE Connectivity Company  
No. 26 Langshan Road  
Shenzhen High-Tech Park (North)  
Nanshan District, Shenzhen 518057 China  
Tel +86 755 3330 5088  
Fax +86 755 3330 5099

#### TE.com/sensorsolutions

Measurement Specialties, Inc., a TE Connectivity company.

Measurement Specialties, TE Connectivity, TE connectivity (logo) and EVERY CONNECTION COUNTS are trademarks. All other logos, products and/or company names referred to herein might be trademarks of their respective owners.

The information given herein, including drawings, illustrations and schematics which are intended for illustration purposes only, is believed to be reliable. However, TE Connectivity makes no warranties as to its accuracy or completeness and disclaims any liability in connection with its use. TE Connectivity's obligations shall only be as set forth in TE Connectivity's Standard Terms and Conditions of Sale for this product and in no case will TE Connectivity be liable for any incidental, indirect or consequential damages arising out of the sale, resale, use or misuse of the product. Users of TE Connectivity products should make their own evaluation to determine the suitability of each such product for the specific application.

© 2015 TE Connectivity Ltd. family of companies All Rights Reserved.



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



#### Как с нами связаться

**Телефон:** 8 (812) 309 58 32 (многоканальный)

**Факс:** 8 (812) 320-02-42

**Электронная почта:** [org@eplast1.ru](mailto:org@eplast1.ru)

**Адрес:** 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.