

IDP31-104

100% flat fronted touch and non-touch, Industrial grade monitors. Ultra thin profile, smooth rounded corners and rugged glass fronted for a totally contemporary outlook.

NEW



FCC CE RoHS COMPLIANT PRODUCT

Features

- 10.4" LCD panel with LED backlight for long service life
- Wide operating temperature -10 to +70° C for broad range of applications
- Regular brightness 400 CD/m²
- True flat surface – contemporary Proflat style
- Wide view-angle for portrait and landscape mode
- Built-in audio and speakers
- Thin profile, enclosure – no need for additional enclosures or metalwork
- Multi-touch PCT touch overlay
- Configurable Options:
 - Brightness 400 CD/m²
 - View angle 80°/80°/60°/70°
 - Mechanical housing
 - VGA, DVI interface

Introduction

The IDP31-104 Proflat series responds to a demand for contemporary styling in demanding applications such as public signage, front of house information, medical and point-of-sale. Each product features a truly-flat, easy to clean and maintain glass surface with long term product availability. All products can be used in either portrait or landscape mode and are cleverly packaged in such a way that no further mechanical parts are needed other than a VESA mount to create a display system. The use of a metal chassis provides a rugged and stable platform for the widest range of applications. Optional multi-touch and the choice of both black or white finish creates further opportunity for those seeking to differentiate their next product design.

Typical Applications


- Signage and public information
- Way-finder
- Kiosks and point of sale
- Medical
- Digital assistant

Specifications

Display Features	Spec	Notes
Model	IDP31-104	
Backlight	LED	Light source
Resolution	800 x 600	Native resolution. Other resolutions supported by A/D card scaling
Brightness	400 cd/m ²	Measured at typical operating voltage
Viewing Angle	80°/80°/60°/70°	Left/Right/Up/Down
Surface Treatment	3H	MoHS/Anti glare
Contrast Ratio	700:1	In laboratory measurement conditions
Max Colors	16.2M/262K	6/8 bit per colour
Response Time	15 ms	Typical
Backlight Lifetime	50,000 hours	Typ. time to half brightness in room temperature operation
Cover glass	3mm toughened	
Operating Temp	-10° to +70° C	Industrial use
Touch Screen	10 points PCT	Projected Capacitive overlay (USB)
Input / Output	VGA, DVI	Audio output 3W
IP Rating	IP54	Front & Side of the monitor

Dimensions

Unit: mm

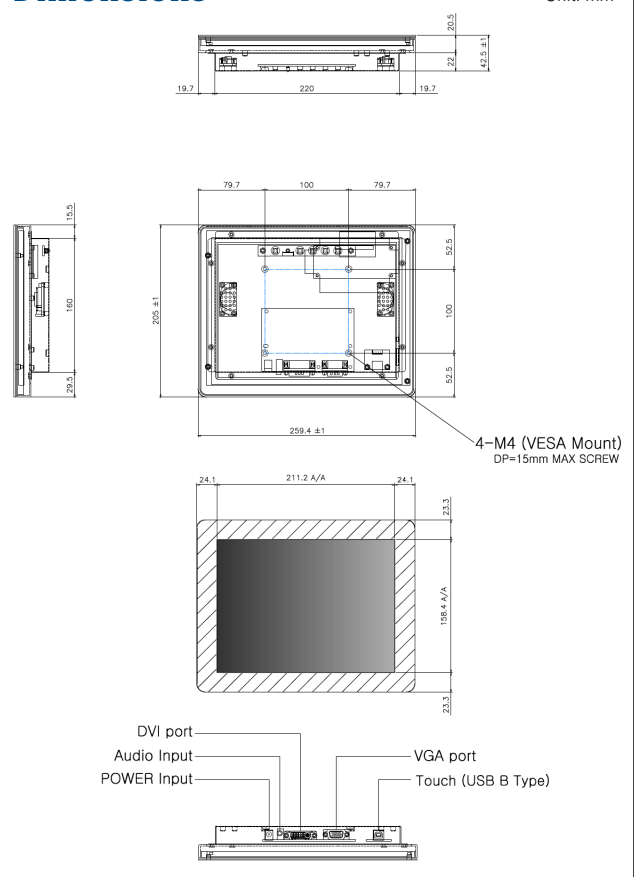

Touch Screen Options

Type 10.4" Screen	Cover glass (CG)	Analogue Resistive (AR)	Surface Acoustic Wave (SAW)	Surface Capacitive (SCAP)	Projected Capacitive (PCT)	Infra-red (IR)	Multi-touch
	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>
Construction	3mm heat strengthened glass	ITO film to ITO coated glass	4mm pure glass sensor	Hard coat ITO pure glass	ITO film/film with Chemical strengthened glass	3mm tempered glass with infrared sensor	Either PCT or IR
Surface Durability (no of touches)	7H	3H	7H	<4H	<4H	7H	-
IP Rating (potential)	-	> 1m	>5m	>1m	>1m	>1m	-
IP Rating (potential)	IP65	IP65	IP65	IP65	IP65	IP65	IP65
Touches	0	1	1	1	1/2/10/30	1040g/63.5mm	-
Transparency	93±2%	81%	90±5%	91±1.5%	82%	-	-
Drop Ball	500g / 50cm	227g/38Φ steel ball from 80cm height	1040g / 90cm	UL60950 (Tough touch only)	227g/38Φ steel ball from 80cm height	1040g/63.5mm ball dropped from height of 1.0m	227g/38Φ steel ball from 80cm height
Added thickness (typ.)	4/5/6/10/12mm	1.8mm	6mm	8mm	3/4/5/6m	See drawing	See drawing
Custom Options	AR coating Optical bonding	Optical bonding	Dustproof, Waterproof, Antiglare, Safe touch	Optical bonding, Tough touch	AR coating, Glass painting, Customer logo, 10point touch (21.5",23",24"), Optical bonding	2point, AR coating, Optical bonding	Extended cover glass Back printing Whole cutting

System/Electrical Features

System / Electrical	Spec	Unit / Notes
Power Consumption	4.88W	Typical consumption at standard brightness and temperature
Power Supply	12V / 3.5A	External DC power brick (included) Input voltage-DC +12V +/-5% @ 2.5A max Power connector: DC jack
Video Input (available options)	<input checked="" type="checkbox"/> VGA <input checked="" type="checkbox"/> DVI HDMI COMPOSITE USB DisplayPort	Native resolution. Other resolutions supported by A/D card scaling
On-screen Display (OSD)	5- keys Menu Functions	Menu / up / down / enter / Power ON-OFF Brightness, Contrast, Screen Setting, Colour Temp, Language OSD Settings, VGA/DVI, Recall, Auto Adjust
Custom BIOS options		

Mechanical Features

Mechanical	Spec	Notes
Overall size	259.4 x 205 x 42.5 mm	[proflat]
Active Area Size	211.2 (H) x 158.4 (V) mm	
Case / Bezel color	Black or White powder coat	Custom colour and finishes available
Weight	3.0kg	Typ .inc touch
VESA Mounting Options:	100 x 100	For User defined mounting requirements contact rep

Environmental Features

Environmental	Spec
Operating Temp	-10 to +70° C
Storage Temp	-30 to +85° C
Humidity	90% RH
Vibration	1.5G, (10~200Hz, P-P) 30 mins/axis (X, Y, Z)
Agency Approvals	CE, FCC, RoHS

Ordering Information

Model Name	Description
IDP31-104-P40DVB1E	10.4" Industrial black ProFlat monitor with PCT Multi-touch touchscreen, 400CD/m ² brightness, VGA & DVI input
IDP31-104-P40DWW1E	10.4" Industrial white ProFlat monitor with PCT Multi-touch touchscreen, 400CD/m ² brightness, VGA & DVI input

Accessory Package

- Power supply (110V-240V), UK/EU/US power cord, VGA cable, DVI cable, USB cable for touch function

All Advantech monitors are configurable to order. Use www.advantech.com for guidance on versions, pricing and deliver for all models



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.