



## 3.3V ZERO DELAY CLOCK BUFFER, SPREAD SPECTRUM COMPATIBLE

**IDT23S05E**

### FEATURES:

- Phase-Lock Loop Clock Distribution
- 10MHz to 200MHz operating frequency
- Distributes one clock input to one bank of five outputs
- Zero Input-Output Delay
- Output Skew < 250ps
- Low jitter < 200 ps cycle-to-cycle
- IDT23S05E-1 for Standard Drive
- IDT23S05E-1H for High Drive
- No external RC network required
- Operates at 3.3V V<sub>DD</sub>
- Power down mode
- Spread spectrum compatible
- Available in SOIC package


### DESCRIPTION:

The IDT23S05E is a high-speed phase-lock loop (PLL) clock buffer, designed to address high-speed clock distribution applications. The zero delay is achieved by aligning the phase between the incoming clock and the output clock, operable within the range of 10 to 200MHz.


The IDT23S05E is an 8-pin version of the IDT23S09E. IDT23S05E accepts one reference input, and drives out five low skew clocks. The -1H version of this device operates up to 200MHz frequency and has a higher drive than the -1 device. All parts have on-chip PLLs which lock to an input clock on the REF pin. The PLL feedback is on-chip and is obtained from the CLKOUT pad. In the absence of an input clock, the IDT23S05E enters power down. In this mode, the device will draw less than 12μA for Commercial Temperature range and less than 25μA for Industrial temperature range, the outputs are tri-stated, and the PLL is not running, resulting in a significant reduction of power.

The IDT23S05E is characterized for both Industrial and Commercial operation.

### FUNCTIONAL BLOCK DIAGRAM

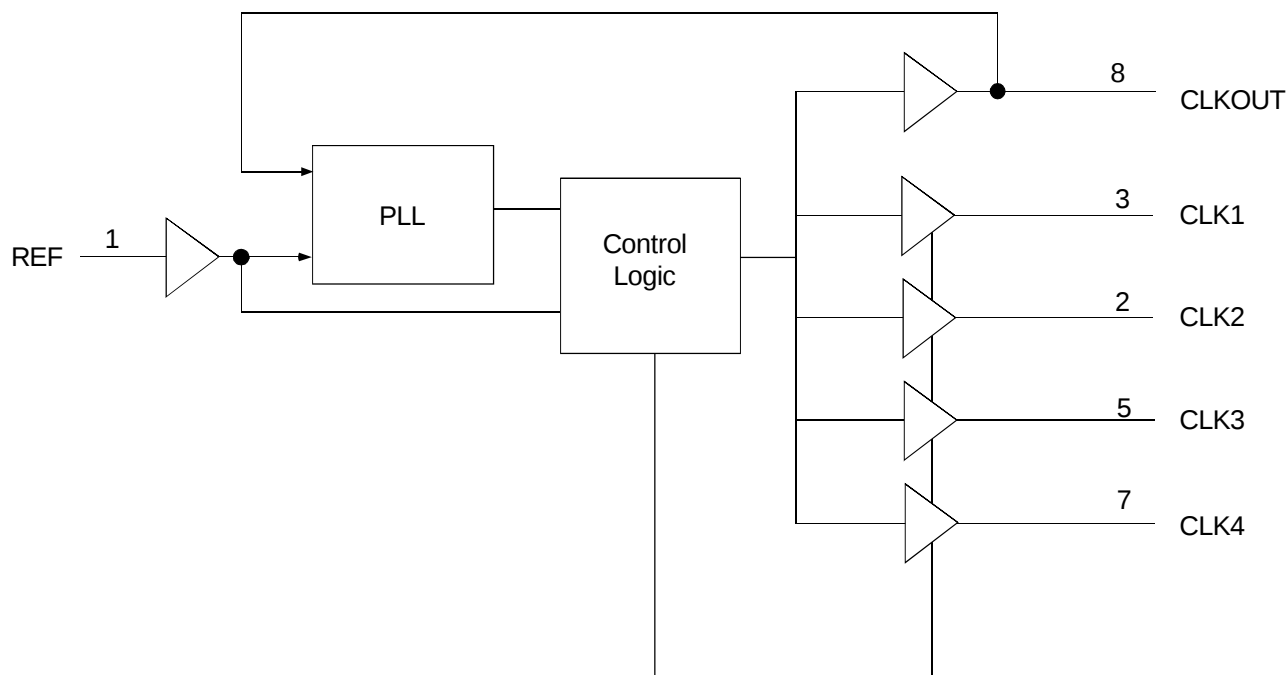

## PIN CONFIGURATION

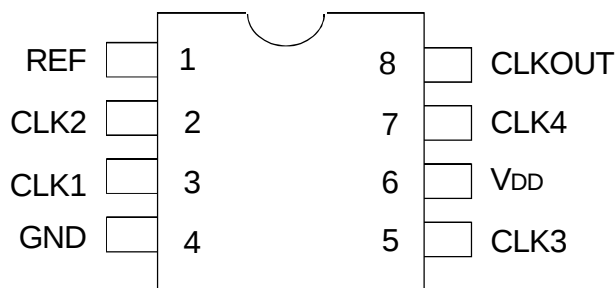

## ABSOLUTE MAXIMUM RATINGS<sup>(1)</sup>

| Symbol                                                  | Rating                           | Max.                         | Unit |
|---------------------------------------------------------|----------------------------------|------------------------------|------|
| V <sub>DD</sub>                                         | Supply Voltage Range             | -0.5 to +4.6                 | V    |
| V <sub>I</sub> <sup>(2)</sup>                           | Input Voltage Range (REF)        | -0.5 to +5.5                 | V    |
| V <sub>I</sub>                                          | Input Voltage Range (except REF) | -0.5 to V <sub>DD</sub> +0.5 | V    |
| I <sub>IK</sub> (V <sub>I</sub> < 0)                    | Input Clamp Current              | -50                          | mA   |
| I <sub>O</sub> (V <sub>O</sub> = 0 to V <sub>DD</sub> ) | Continuous Output Current        | ±50                          | mA   |
| V <sub>DD</sub> or GND                                  | Continuous Current               | ±100                         | mA   |
| T <sub>A</sub> = 55°C (in still air) <sup>(3)</sup>     | Maximum Power Dissipation        | 0.7                          | W    |
| T <sub>STG</sub>                                        | Storage Temperature Range        | -65 to +150                  | °C   |
| Operating Temperature                                   | Commercial Temperature Range     | 0 to +70                     | °C   |
| Operating Temperature                                   | Industrial Temperature Range     | -40 to +85                   | °C   |

### NOTES:

1. Stresses greater than those listed under ABSOLUTE MAXIMUM RATINGS may cause permanent damage to the device. This is a stress rating only and functional operation of the device at these or any other conditions above those indicated in the operational sections of this specification is not implied. Exposure to absolute maximum rating conditions for extended periods may affect reliability.
2. The input and output negative-voltage ratings may be exceeded if the input and output clamp-current ratings are observed.
3. The maximum package power dissipation is calculated using a junction temperature of 150°C and a board trace length of 750 mils.

## APPLICATIONS:

- SDRAM
- Telecom
- Datacom
- PC Motherboards/Workstations
- Critical Path Delay Designs

## PIN DESCRIPTION

| Pin Name              | Pin Number | Type   | Functional Description                       |
|-----------------------|------------|--------|----------------------------------------------|
| REF <sup>(1)</sup>    | 1          | IN     | Input reference clock, 5 Volt tolerant input |
| CLK2 <sup>(2)</sup>   | 2          | Out    | Output clock                                 |
| CLK1 <sup>(2)</sup>   | 3          | Out    | Output clock                                 |
| GND                   | 4          | Ground | Ground                                       |
| CLK3 <sup>(2)</sup>   | 5          | Out    | Output clock                                 |
| V <sub>DD</sub>       | 6          | PWR    | 3.3V Supply                                  |
| CLK4 <sup>(2)</sup>   | 7          | Out    | Output clock                                 |
| CLKOUT <sup>(2)</sup> | 8          | Out    | Output clock, internal feedback on this pin  |

### NOTES:

1. Weak pull down.
2. Weak pull down on all outputs.

## OPERATING CONDITIONS - COMMERCIAL

| Symbol          | Parameter                                   | Min. | Max. | Unit |
|-----------------|---------------------------------------------|------|------|------|
| V <sub>DD</sub> | Supply Voltage                              | 3    | 3.6  | V    |
| T <sub>A</sub>  | Operating Temperature (Ambient Temperature) | 0    | 70   | °C   |
| C <sub>L</sub>  | Load Capacitance < 100MHz                   | —    | 30   | pF   |
|                 | Load Capacitance 100MHz - 200MHz            | —    | 10   |      |
| C <sub>IN</sub> | Input Capacitance                           | —    | 7    | pF   |

## DC ELECTRICAL CHARACTERISTICS - COMMERCIAL

| Symbol             | Parameter                | Conditions                        |                               | Min. | Max. | Unit |
|--------------------|--------------------------|-----------------------------------|-------------------------------|------|------|------|
| V <sub>IL</sub>    | Input LOW Voltage Level  |                                   |                               | —    | 0.8  | V    |
| V <sub>IH</sub>    | Input HIGH Voltage Level |                                   |                               | 2    | —    | V    |
| I <sub>IL</sub>    | Input LOW Current        | V <sub>IN</sub> = 0V              |                               | —    | 50   | μA   |
| I <sub>IH</sub>    | Input HIGH Current       | V <sub>IN</sub> = V <sub>DD</sub> |                               | —    | 100  | μA   |
| V <sub>OL</sub>    | Output LOW Voltage       | Standard Drive                    | I <sub>OL</sub> = 8mA         | —    | 0.4  | V    |
|                    |                          | High Drive                        | I <sub>OL</sub> = 12mA (-1H)  |      |      |      |
| V <sub>OH</sub>    | Output HIGH Voltage      | Standard Drive                    | I <sub>OH</sub> = -8mA        | 2.4  | —    | V    |
|                    |                          | High Drive                        | I <sub>OH</sub> = -12mA (-1H) |      |      |      |
| I <sub>DD_PD</sub> | Power Down Current       | REF = 0MHz                        |                               | —    | 12   | μA   |
| I <sub>DD</sub>    | Supply Current           | Unloaded Outputs at 66.66MHz      |                               | —    | 32   | mA   |

SWITCHING CHARACTERISTICS (23S05E-1) - COMMERCIAL<sup>(1,2)</sup>

| Symbol            | Parameter                                    | Conditions                                                   | Min. | Typ. | Max. | Unit |
|-------------------|----------------------------------------------|--------------------------------------------------------------|------|------|------|------|
| t <sub>1</sub>    | Output Frequency                             | 10pF Load                                                    | 10   | —    | 200  | MHz  |
|                   |                                              | 30pF Load                                                    | 10   | —    | 100  |      |
|                   | Duty Cycle = t <sub>2</sub> ÷ t <sub>1</sub> | Measured at 1.4V, F <sub>OUT</sub> = 66.66MHz                | 40   | 50   | 60   | %    |
| t <sub>3</sub>    | Rise Time                                    | Measured between 0.8V and 2V                                 | —    | —    | 2.5  | ns   |
| t <sub>4</sub>    | Fall Time                                    | Measured between 0.8V and 2V                                 | —    | —    | 2.5  | ns   |
| t <sub>5</sub>    | Output to Output Skew                        | All outputs equally loaded                                   | —    | —    | 250  | ps   |
| t <sub>6</sub>    | Delay, REF Rising Edge to CLKOUT Rising Edge | Measured at V <sub>DD</sub> /2                               | —    | 0    | ±350 | ps   |
| t <sub>7</sub>    | Device-to-Device Skew                        | Measured at V <sub>DD</sub> /2 on the CLKOUT pins of devices | —    | 0    | 700  | ps   |
| t <sub>8</sub>    | Cycle-to-Cycle Jitter, pk - pk               | Measured at 66.66MHz, loaded outputs                         | —    | —    | 200  | ps   |
| t <sub>LOCK</sub> | PLL Lock Time                                | Stable power supply, valid clock presented on REF pin        | —    | —    | 1    | ms   |

## NOTES:

1. REF Input has a threshold voltage of V<sub>DD</sub>/2.
2. All parameters specified with loaded outputs.

## SWITCHING CHARACTERISTICS (23S05E-1H) - COMMERCIAL<sup>(1,2)</sup>

| Symbol            | Parameter                                    | Conditions                                                   | Min. | Typ. | Max. | Unit |
|-------------------|----------------------------------------------|--------------------------------------------------------------|------|------|------|------|
| t <sub>f</sub>    | Output Frequency                             | 10pF Load                                                    | 10   | —    | 200  | MHz  |
|                   |                                              | 30pF Load                                                    | 10   | —    | 100  |      |
|                   | Duty Cycle = t <sub>2</sub> ÷ t <sub>1</sub> | Measured at 1.4V, F <sub>OUT</sub> = 66.66MHz                | 40   | 50   | 60   | %    |
|                   | Duty Cycle = t <sub>2</sub> ÷ t <sub>1</sub> | Measured at 1.4V, F <sub>OUT</sub> < 50MHz                   | 45   | 50   | 55   | %    |
| t <sub>r</sub>    | Rise Time                                    | Measured between 0.8V and 2V                                 | —    | —    | 1.5  | ns   |
| t <sub>f</sub>    | Fall Time                                    | Measured between 0.8V and 2V                                 | —    | —    | 1.5  | ns   |
| t <sub>s</sub>    | Output to Output Skew                        | All outputs equally loaded                                   | —    | —    | 250  | ps   |
| t <sub>d</sub>    | Delay, REF Rising Edge to CLKOUT Rising Edge | Measured at V <sub>DD</sub> /2                               | —    | 0    | ±350 | ps   |
| t <sub>z</sub>    | Device-to-Device Skew                        | Measured at V <sub>DD</sub> /2 on the CLKOUT pins of devices | —    | 0    | 700  | ps   |
| t <sub>s</sub>    | Output Slew Rate                             | Measured between 0.8V and 2V using Test Circuit #2           | 1    | —    | —    | V/ns |
| t <sub>j</sub>    | Cycle-to-Cycle Jitter, pk - pk               | Measured at 66.66MHz, loaded outputs                         | —    | —    | 200  | ps   |
| t <sub>LOCK</sub> | PLL Lock Time                                | Stable power supply, valid clock presented on REF pin        | —    | —    | 1    | ms   |

### NOTES:

1. REF Input has a threshold voltage of V<sub>DD</sub>/2.
2. All parameters specified with loaded outputs.

## OPERATING CONDITIONS - INDUSTRIAL

| Symbol          | Parameter                                   | Min. | Max. | Unit |
|-----------------|---------------------------------------------|------|------|------|
| V <sub>DD</sub> | Supply Voltage                              | 3    | 3.6  | V    |
| T <sub>A</sub>  | Operating Temperature (Ambient Temperature) | -40  | +85  | °C   |
| C <sub>L</sub>  | Load Capacitance < 100MHz                   | —    | 30   | pF   |
|                 | Load Capacitance 100MHz - 200MHz            | —    | 10   |      |
| C <sub>IN</sub> | Input Capacitance                           | —    | 7    | pF   |

## DC ELECTRICAL CHARACTERISTICS - INDUSTRIAL

| Symbol             | Parameter                | Conditions                        |                               | Min. | Max. | Unit |
|--------------------|--------------------------|-----------------------------------|-------------------------------|------|------|------|
| V <sub>IL</sub>    | Input LOW Voltage Level  |                                   |                               | —    | 0.8  | V    |
| V <sub>IH</sub>    | Input HIGH Voltage Level |                                   |                               | 2    | —    | V    |
| I <sub>IL</sub>    | Input LOW Current        | V <sub>IN</sub> = 0V              |                               | —    | 50   | μA   |
| I <sub>IH</sub>    | Input HIGH Current       | V <sub>IN</sub> = V <sub>DD</sub> |                               | —    | 100  | μA   |
| V <sub>OL</sub>    | Output LOW Voltage       | Standard Drive                    | I <sub>OL</sub> = 8mA         | —    | 0.4  | V    |
|                    |                          | High Drive                        | I <sub>OL</sub> = 12mA (-1H)  |      |      |      |
| V <sub>OH</sub>    | Output HIGH Voltage      | Standard Drive                    | I <sub>OH</sub> = -8mA        | 2.4  | —    | V    |
|                    |                          | High Drive                        | I <sub>OH</sub> = -12mA (-1H) |      |      |      |
| I <sub>DD_PD</sub> | Power Down Current       | REF = 0MHz                        |                               | —    | 25   | μA   |
| I <sub>DD</sub>    | Supply Current           | Unloaded Outputs at 66.66MHz      |                               | —    | 35   | mA   |

SWITCHING CHARACTERISTICS (23S05E-1) - INDUSTRIAL<sup>(1,2)</sup>

| Symbol            | Parameter                                    | Conditions                                                   | Min. | Typ. | Max. | Unit |
|-------------------|----------------------------------------------|--------------------------------------------------------------|------|------|------|------|
| t <sub>l</sub>    | Output Frequency                             | 10pF Load                                                    | 10   | —    | 200  | MHz  |
|                   |                                              | 30pF Load                                                    | 10   | —    | 100  |      |
|                   | Duty Cycle = t <sub>2</sub> ÷ t <sub>1</sub> | Measured at 1.4V, F <sub>OUT</sub> = 66.66MHz                | 40   | 50   | 60   | %    |
| t <sub>3</sub>    | Rise Time                                    | Measured between 0.8V and 2V                                 | —    | —    | 2.5  | ns   |
| t <sub>4</sub>    | Fall Time                                    | Measured between 0.8V and 2V                                 | —    | —    | 2.5  | ns   |
| t <sub>5</sub>    | Output to Output Skew                        | All outputs equally loaded                                   | —    | —    | 250  | ps   |
| t <sub>6</sub>    | Delay, REF Rising Edge to CLKOUT Rising Edge | Measured at V <sub>DD</sub> /2                               | —    | 0    | ±350 | ps   |
| t <sub>7</sub>    | Device-to-Device Skew                        | Measured at V <sub>DD</sub> /2 on the CLKOUT pins of devices | —    | 0    | 700  | ps   |
| t <sub>j</sub>    | Cycle-to-Cycle Jitter, pk - pk               | Measured at 66.66MHz, loaded outputs                         | —    | —    | 200  | ps   |
| t <sub>LOCK</sub> | PLL Lock Time                                | Stable power supply, valid clock presented on REF pin        | —    | —    | 1    | ms   |

## NOTES:

1. REF Input has a threshold voltage of V<sub>DD</sub>/2.
2. All parameters specified with loaded outputs.

SWITCHING CHARACTERISTICS (23S05E-1H) - INDUSTRIAL<sup>(1,2)</sup>

| Symbol            | Parameter                                    | Conditions                                                   | Min. | Typ. | Max. | Unit |
|-------------------|----------------------------------------------|--------------------------------------------------------------|------|------|------|------|
| t <sub>l</sub>    | Output Frequency                             | 10pF Load                                                    | 10   | —    | 200  | MHz  |
|                   |                                              | 30pF Load                                                    | 10   | —    | 100  |      |
|                   | Duty Cycle = t <sub>2</sub> ÷ t <sub>1</sub> | Measured at 1.4V, F <sub>OUT</sub> = 66.66MHz                | 40   | 50   | 60   | %    |
|                   | Duty Cycle = t <sub>2</sub> ÷ t <sub>1</sub> | Measured at 1.4V, F <sub>OUT</sub> <50MHz                    | 45   | 50   | 55   | %    |
| t <sub>3</sub>    | Rise Time                                    | Measured between 0.8V and 2V                                 | —    | —    | 1.5  | ns   |
| t <sub>4</sub>    | Fall Time                                    | Measured between 0.8V and 2V                                 | —    | —    | 1.5  | ns   |
| t <sub>5</sub>    | Output to Output Skew                        | All outputs equally loaded                                   | —    | —    | 250  | ps   |
| t <sub>6</sub>    | Delay, REF Rising Edge to CLKOUT Rising Edge | Measured at V <sub>DD</sub> /2                               | —    | 0    | ±350 | ps   |
| t <sub>7</sub>    | Device-to-Device Skew                        | Measured at V <sub>DD</sub> /2 on the CLKOUT pins of devices | —    | 0    | 700  | ps   |
| t <sub>8</sub>    | Output Slew Rate                             | Measured between 0.8V and 2V using Test Circuit #2           | 1    | —    | —    | V/ns |
| t <sub>j</sub>    | Cycle-to-Cycle Jitter, pk - pk               | Measured at 66.66MHz, loaded outputs                         | —    | —    | 200  | ps   |
| t <sub>LOCK</sub> | PLL Lock Time                                | Stable power supply, valid clock presented on REF pin        | —    | —    | 1    | ms   |

## NOTES:

1. REF Input has a threshold voltage of V<sub>DD</sub>/2.
2. All parameters specified with loaded outputs.

## ZERO DELAY AND SKEW CONTROL






All outputs should be uniformly loaded in order to achieve Zero I/O Delay. Since the CLKOUT pin is the internal feedback for the PLL, its relative loading can affect and adjust the input/output delay.

For designs utilizing zero I/O Delay, all outputs including CLKOUT must be equally loaded. Even if the output is not used, it must have a capacitive load equal to that on the other outputs in order to obtain true zero I/O Delay. For zero output-to-output skew, all outputs must be loaded equally.


## SPREAD SPECTRUM COMPATIBLE

Many systems being designed now use a technology called Spread Spectrum Frequency Timing Generation. This product is designed not to filter off the Spread Spectrum feature of the reference input, assuming it exists. When a zero delay buffer is not designed to pass the Spread Spectrum feature through, the result is a significant amount of tracking skew, which may cause problems in systems requiring synchronization.


## SWITCHING WAVEFORMS

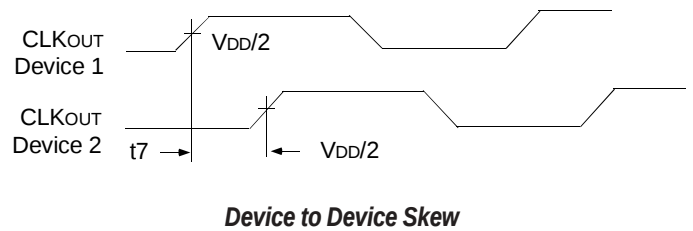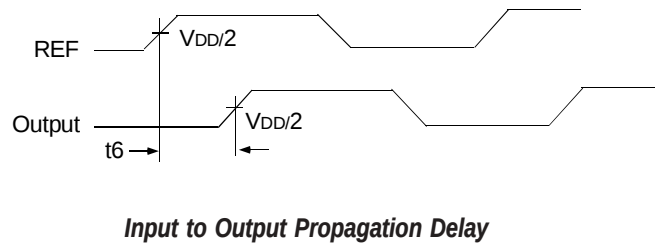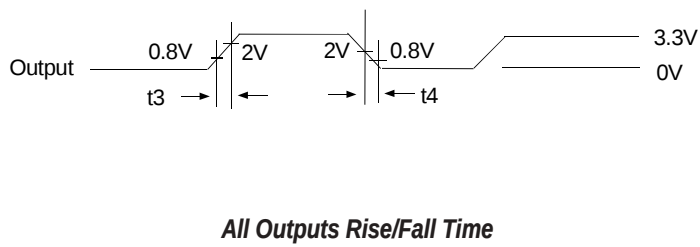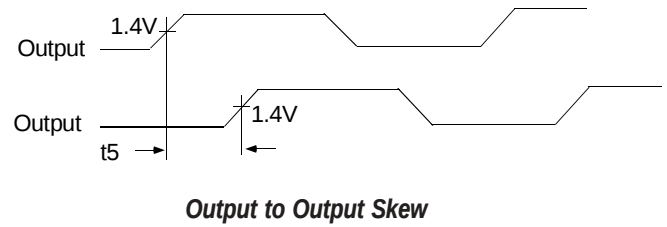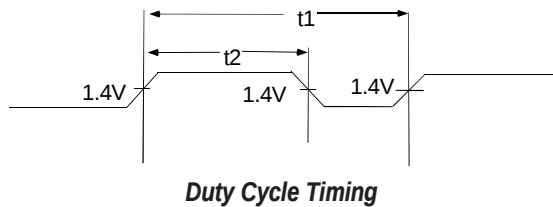

## TEST CIRCUITS

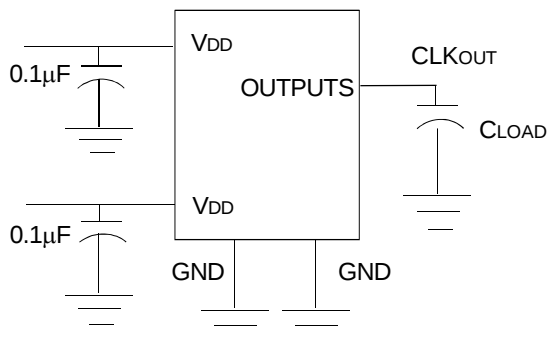

Test Circuit 1 (all Parameters Except  $t_8$ )

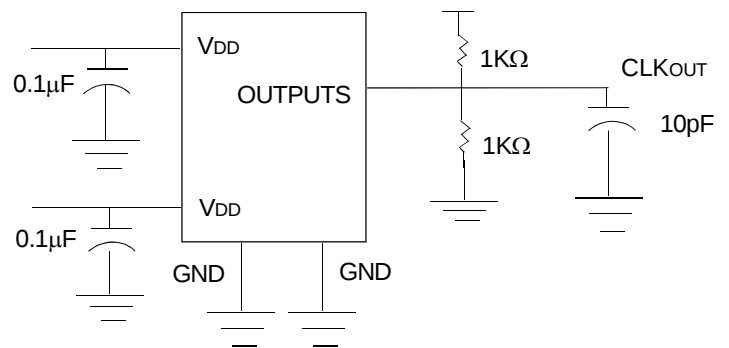

Test Circuit 2 ( $t_8$ , Output Slew Rate On -1H Devices)

## ORDERING INFORMATION

| IDT         | XXXXX   | XX      | X         |                                                 |  |
|-------------|---------|---------|-----------|-------------------------------------------------|--|
| Device Type | Package | Process |           |                                                 |  |
|             |         |         | Blank     | Commercial (0°C to +70°C)                       |  |
|             |         |         | I         | Industrial (-40°C to +85°C)                     |  |
|             |         |         | DC        | Small Outline                                   |  |
|             |         |         | 23S05E-1  | Zero Delay Clock Buffer with High Drive Output, |  |
|             |         |         | 23S05E-1H | Spread Spectrum Compatible                      |  |

| Ordering Code   | Package Type | Operating Range |
|-----------------|--------------|-----------------|
| IDT23S05E-1DC   | 8-Pin SOIC   | Commercial      |
| IDT23S05E-1DCI  | 8-Pin SOIC   | Industrial      |
| IDT23S05E-1HDC  | 8-Pin SOIC   | Commercial      |
| IDT23S05E-1HDCI | 8-Pin SOIC   | Industrial      |



**CORPORATE HEADQUARTERS**  
2975 Stender Way  
Santa Clara, CA 95054

**for SALES:**  
800-345-7015 or 408-727-6116  
fax: 408-492-8674  
www.idt.com

**for Tech Support:**  
logichelp@idt.com  
(408) 654-6459



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



#### Как с нами связаться

**Телефон:** 8 (812) 309 58 32 (многоканальный)

**Факс:** 8 (812) 320-02-42

**Электронная почта:** [org@eplast1.ru](mailto:org@eplast1.ru)

**Адрес:** 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.