


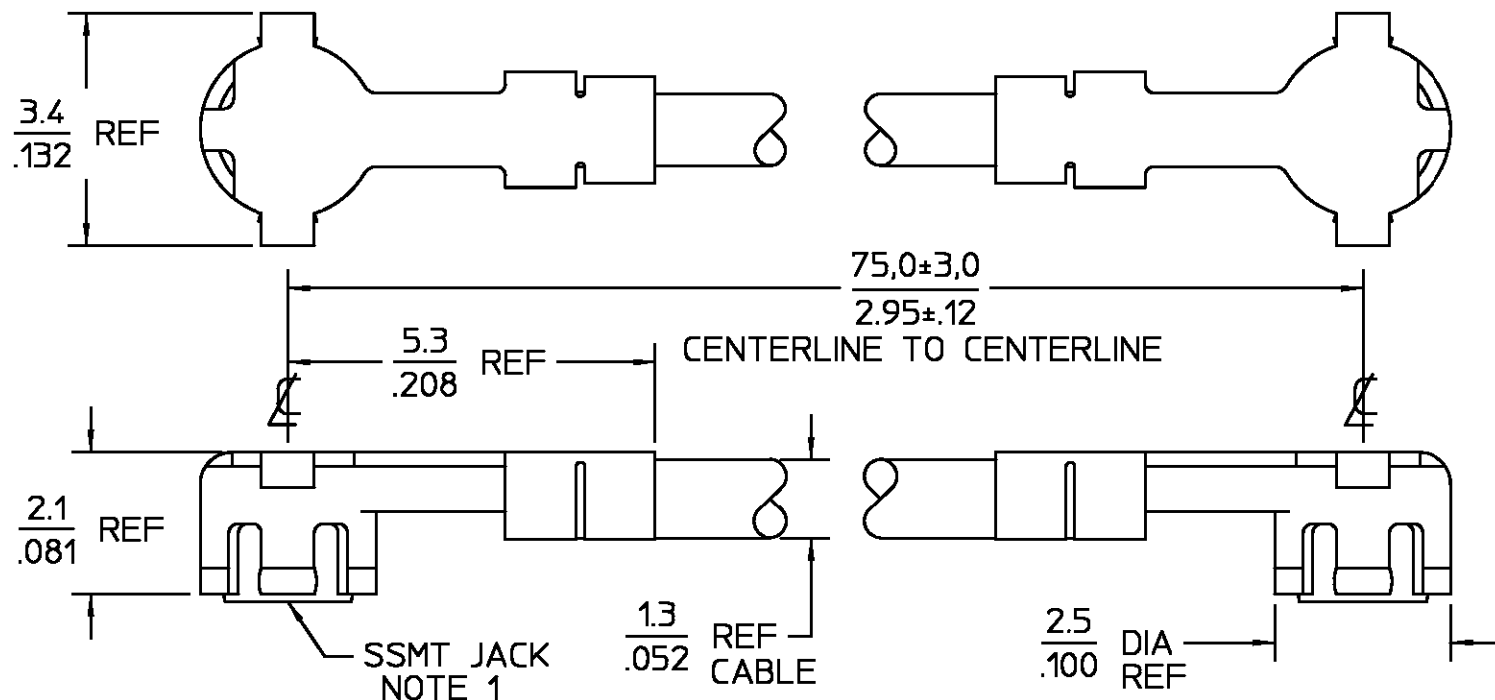

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
010	RELEASED	7/21/95	S. Morley
011	REVISED PER ECN 95-0547	12/7/95	S. Morley
012	REVISED PER ECN 99-0001	DM 5/20/99	S. Morley
013	REVISED PER ECN 99-0001	DM 6/25/99	PCV 6/25/99

NOTES:

1. CONNECTOR CENTERLINES SHALL BE ALIGNED AS SHOWN WITHIN $\pm 30^\circ$ FOR LENGTHS 165 MILLIMETERS OR LESS. LENGTHS ABOVE 165 MILLIMETERS SHALL HAVE CONNECTOR CENTERLINES ALIGNED AT RANDOM.

XX.X = mm
.XXX = in

ELECTRICAL

Frequency DC - 6 GHz
Nominal Impedance 50 ohms
Voltage Rating 250 Volts (VRMS Max.)
@ Sea Level
VSWR 1.20:1 Max. @ 2GHz
1.40:1 Max. @ 6GHz
Insulation Resistance 1,000 Megohms Minimum @ 250VDC
Dielectric Withstanding Voltage 500 Volts (VRMS Minimum)
@ Sea Level

MECHANICAL

Connector Durability 100 mating cycles

ENVIRONMENTAL

Temperature Rating $-40^\circ\text{C} (-40^\circ\text{F})$ To $+125^\circ\text{C} (257^\circ\text{F})$

CONNECTOR:

INNER & OUTER CONTACTS

BERYLLIUM COPPER ALLOY CDA172

GOLD PLATE OVER NICKEL PLATE

DIELECTRIC

POLYPROPYLENE, GF

N/A

CABLE:

JACKET

FEP FLUOROCARBON PER ASTM-D2116

N/A

SHIELD

COPPER WIRE, 44AWG

SILVER PLATED

DIELECTRIC

PTFE FLUOROCARBON PER ASTM-D1457

N/A

CENTER CONDUCTOR

COPPER CLAD STEEL, 30AWG

SILVER PLATED

COMPONENT

MATERIAL

FINISH

UNLESS OTHERWISE SPECIFIED
DIMENSIONS ARE IN MILLIMETERS
TOLERANCE ON
FRAC DEC ANGLES
- - -

DRAWN BY P. RESNICK DATE 3 JUNE 94

CHECKED BY

APPD BY

AMP Incorporated

140 Fourth Avenue
Waltham, MA 02451-7599

AMP

These drawings and specifications are the property of AMP Incorporated and shall not be reproduced or copied or used in whole or in part as the basis for the manufacture or sale of item(s) without written permission.

USE ASSY PROCEDURE

NO. A.P. N/A

TITLE
SSMT RIGHT ANGLE JACK TO JACK CABLE ASSEMBLY

SIZE B	CODE IDENT NO. 26805	9960-1075-24	REV 013
-----------	-------------------------	--------------	------------

SCALE 10:1	CABLE TYPE SSMT-FLEX	SHEET 1 OF 2
---------------	-------------------------	--------------

CUSTOMER DRAWING

AMP PART # 1064523-1
SHEET 1 OF 1 REV A

OUTLINE, -50 AND B/M MUST CARRY
THE SAME MAJOR REVISION LEVEL



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.